

知 F1000-AK155(V7) 报文捕获失败

内存 彭钦 2021-12-27 发表

组网及说明


版本为9333P25

问题描述

web抓包报错：操作失败 命令行抓包报错：failed to start packet capture

```
[F1000]packet-capture start ac
[F1000]packet-capture start acl ?
  INTEGER<3000-3999>  Advanced ACL number
  ipv6                Capture packets permitted by an IPv6 advanced ACL

[F1000]packet-capture start acl 3999
The operation will delete .cap files in storage path, continue?[y/n]
Failed to start packet capture.
```

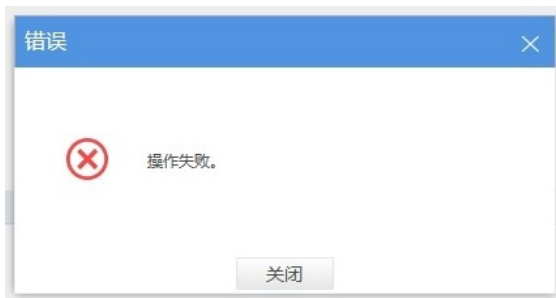

过程分析

这个日志表示内存申请失败

```
[F1000-probe]view /var/log/trace.log | include PCAPWARE
*Dec 25 10:12:58:521 2021 F1000 PCAPWARE/6/PCAPWARE_KTRACE: vir addr=0, phyaddr=400000000000
000, page size=20971520
*Dec 27 17:31:10:076 2021 F1000 PCAPWARE/6/PCAPWARE_KTRACE: vir addr=0, phyaddr=400000000000
000, page size=20971520
*Dec 27 17:32:21:305 2021 F1000 PCAPWARE/6/PCAPWARE_KTRACE: vir addr=0, phyaddr=400000000000
000, page size=20971520
*Dec 27 17:33:16:876 2021 F1000 PCAPWARE/6/PCAPWARE_KTRACE: vir addr=0, phyaddr=400000000000
000, page size=20971520
```

解决方法

升级到官网最新版本解决

