


知 F1060路由模式典型组网配置案例2 (RIP)

设备部署方式 H3C模拟器 韦家宁 2020-03-29 发表

组网及说明

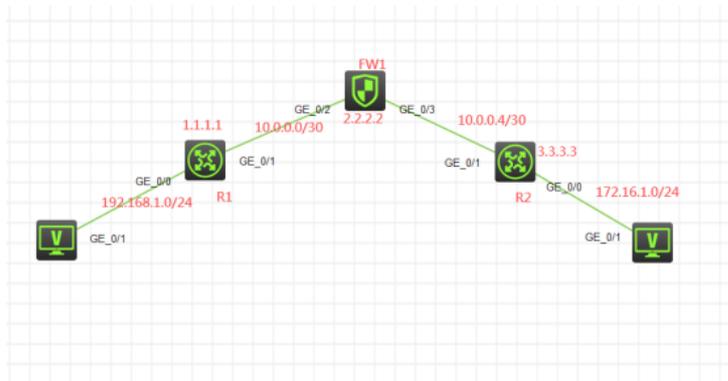

组网说明:

本案例采用H3C HCL模拟器的F1060防火墙来模拟防火墙路由模式的典型部署。为了实现PC之间能够相互通信,因此需要分别在R1、R2、FW1采用三层互联,同时FW1采用路由模式,最终实现PC之间能够相互PING通。

配置步骤

- 1、按照网络拓扑图正确配置IP地址
- 2、R1、FW1、R2之间采用三层互联
- 3、R1、FW1、R2之间采用RIP路由协议实现互通。

配置关键点

R1:

```
<H3C>sys
System View: return to User View with Ctrl+Z.
[H3C]sysname R1
[R1]int gi 0/0
[R1-GigabitEthernet0/0]ip address 192.168.1.1 24
[R1-GigabitEthernet0/0]quit
[R1]int gi 0/1
[R1-GigabitEthernet0/1]des <connect to FW1>
[R1-GigabitEthernet0/1]ip address 10.0.0.1 30
[R1-GigabitEthernet0/1]quit
[R1]int loopback 0
[R1-LoopBack0]ip address 1.1.1.1 32
[R1-LoopBack0]quit
[R1]rip
[R1-rip-1]version 2
[R1-rip-1]network 10.0.0.0
[R1-rip-1]network 1.0.0.0
[R1-rip-1]network 192.168.1.0
[R1-rip-1]quit
```

R2:

```
<H3C>sys
System View: return to User View with Ctrl+Z.
[H3C]sysname R2
[R2]int gi 0/0
[R2-GigabitEthernet0/0]ip address 172.16.1.1 24
[R2-GigabitEthernet0/0]quit
[R2]int gi 0/1
[R2-GigabitEthernet0/1]des <connect to FW1>
[R2-GigabitEthernet0/1]ip address 10.0.0.5 30
[R2-GigabitEthernet0/1]quit
[R2]int loopback 0
[R2-LoopBack0]ip address 3.3.3.3 32
```

```
[R2-LoopBack0]quit
[R2]rip
[R2-rip-1]version 2
[R2-rip-1]network 10.0.0.0
[R2-rip-1]network 3.0.0.0
[R2-rip-1]network 172.16.1.0
[R2-rip-1]quit
```

FW1 :

```
<H3C>sys
```

```
System View: return to User View with Ctrl+Z.
```

```
[H3C]sysname FW1
```

```
[FW1]acl basic 2002
```

```
[FW1-acl-ipv4-basic-2002]rule 0 permit source any
```

```
[FW1-acl-ipv4-basic-2002]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source trust destination untrust
```

```
[FW1-zone-pair-security-Trust-Untrust]packet-filter 2002
```

```
[FW1-zone-pair-security-Trust-Untrust]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source untrust destination trust
```

```
[FW1-zone-pair-security-Untrust-Trust]packet-filter 2002
```

```
[FW1-zone-pair-security-Untrust-Trust]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source trust destination local
```

```
[FW1-zone-pair-security-Trust-Local]packet-filter 2002
```

```
[FW1-zone-pair-security-Trust-Local]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source local destination trust
```

```
[FW1-zone-pair-security-Local-Trust]packet-filter 2002
```

```
[FW1-zone-pair-security-Local-Trust]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source untrust destination local
```

```
[FW1-zone-pair-security-Untrust-Local]packet-filter 2002
```

```
[FW1-zone-pair-security-Untrust-Local]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source local destination untrust
```

```
[FW1-zone-pair-security-Local-Untrust]packet-filter 2002
```

```
[FW1-zone-pair-security-Local-Untrust]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source trust destination trust
```

```
[FW1-zone-pair-security-Trust-Trust]packet-filter 2002
```

```
[FW1-zone-pair-security-Trust-Trust]quit
```

```
[FW1]
```

```
[FW1]zone-pair security source untrust destination untrust
```

```
[FW1-zone-pair-security-Untrust-Untrust]packet-filter 2002
```

```
[FW1-zone-pair-security-Untrust-Untrust]quit
```

```
[FW1]int loopback 0
```

```
[FW1-LoopBack0]ip address 2.2.2.2 32
```

```
[FW1-LoopBack0]quit
```

```
[FW1]int gi 1/0/2
```

```
[FW1-GigabitEthernet1/0/2]des <connect to R1>
```

```
[FW1-GigabitEthernet1/0/2]ip address 10.0.0.2 30
```

```
[FW1-GigabitEthernet1/0/2]quit
```

```
[FW1]int gi 1/0/3
```

```
[FW1-GigabitEthernet1/0/3]des <connect to R2>
```

```
[FW1-GigabitEthernet1/0/3]ip address 10.0.0.6 30
```

```
[FW1-GigabitEthernet1/0/3]quit
```

```
[FW1]security-zone name Trust
```

```
[FW1-security-zone-Trust]import interface GigabitEthernet 1/0/2
```

```
[FW1-security-zone-Trust]import interface loopback 0
```

```
[FW1-security-zone-Trust]quit
```



```
[FW1]security-zone name Untrust
```

```
[FW1-security-zone-Untrust]import interface GigabitEthernet 1/0/3
```


```
[FW1-security-zone-Untrust]quit
[FW1]rip
[FW1-rip-1]version 2
[FW1-rip-1]network 10.0.0.0
[FW1-rip-1]network 2.0.0.0
[FW1-rip-1]quit
```

测试:

PC都填写IP地址:

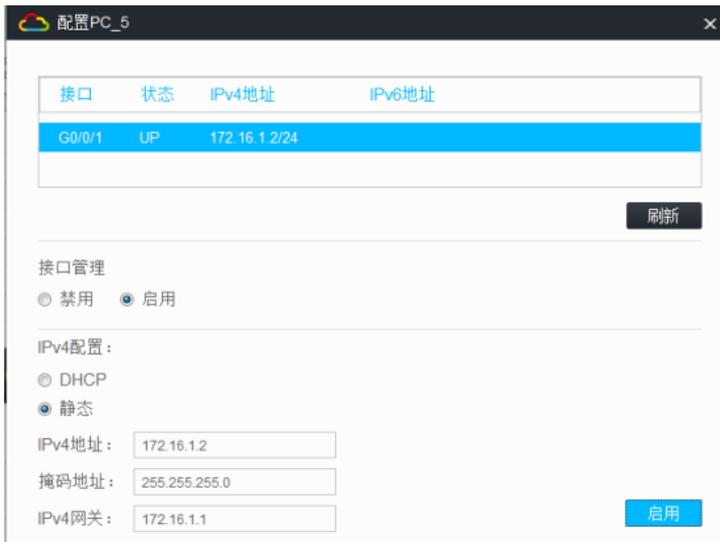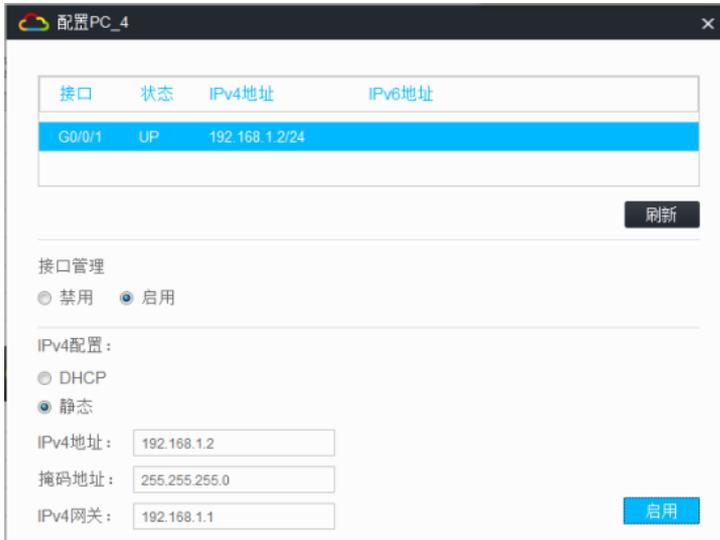

PC之间可以相互PING通:

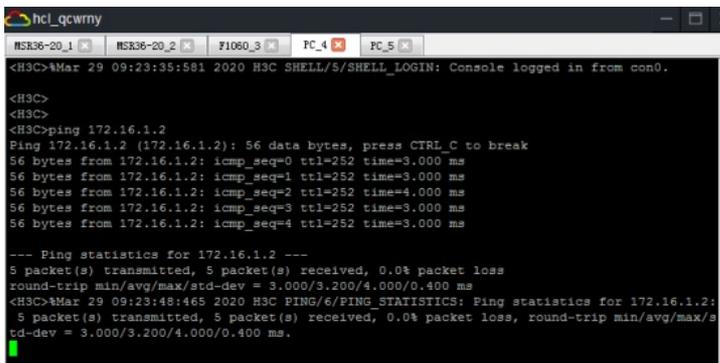

```

hcl_qcwrmy
MSK36-20_1  MSEK36-20_2  F1060_3  PC_4  PC_5
<H3C>Mar 29 09:23:42:560 2020 H3C SHELL/5/SHELL_LOGIN: Console logged in from con0.

<H3C>ping 192.168.1.2
Ping 192.168.1.2 (192.168.1.2): 56 data bytes, press CTRL_C to break
56 bytes from 192.168.1.2: icmp_seq=0 ttl=252 time=5.000 ms
56 bytes from 192.168.1.2: icmp_seq=1 ttl=252 time=3.000 ms
56 bytes from 192.168.1.2: icmp_seq=2 ttl=252 time=3.000 ms
56 bytes from 192.168.1.2: icmp_seq=3 ttl=252 time=4.000 ms
56 bytes from 192.168.1.2: icmp_seq=4 ttl=252 time=4.000 ms

--- Ping statistics for 192.168.1.2 ---
5 packet(s) transmitted, 5 packet(s) received, 0.0% packet loss
round-trip min/avg/max/std-dev = 3.000/3.800/5.000/0.748 ms
<H3C>Mar 29 09:24:06:924 2020 H3C PING/6/PING_STATISTICS: Ping statistics for 192.168.1.2
: 5 packet(s) transmitted, 5 packet(s) received, 0.0% packet loss, round-trip min/avg/max/
std-dev = 3.000/3.800/5.000/0.748 ms.

```

分别查看R1、R2、FW1的路由表:

```

[R1]dis ip routing-table

Destinations : 21      Routes : 21

Destination/Mask    Proto  Pre Cost       NextHop           Interface
0.0.0.0/32          Direct 0 0              127.0.0.1         InLoop0
1.1.1.1/32          Direct 0 0              127.0.0.1         InLoop0
2.0.0.0/8           RIP    100 1              10.0.0.2          GE0/1
3.0.0.0/8           RIP    100 2              10.0.0.2          GE0/1
10.0.0.0/30         Direct 0 0              10.0.0.1          InLoop0
10.0.0.0/32         Direct 0 0              10.0.0.1          GE0/1
10.0.0.1/32         Direct 0 0              127.0.0.1         InLoop0
10.0.0.3/32         Direct 0 0              10.0.0.1          GE0/1
10.0.0.4/30         RIP    100 1              10.0.0.2          GE0/1
127.0.0.0/8         Direct 0 0              127.0.0.1         InLoop0
127.0.0.0/32        Direct 0 0              127.0.0.1         InLoop0
127.0.0.1/32        Direct 0 0              127.0.0.1         InLoop0
127.255.255.255/32 Direct 0 0              127.0.0.1         InLoop0
172.16.0.0/16       RIP    100 2              10.0.0.2          GE0/1
192.168.1.0/24      Direct 0 0              192.168.1.1      GE0/0
192.168.1.0/32      Direct 0 0              192.168.1.1      GE0/0
192.168.1.1/32      Direct 0 0              127.0.0.1         InLoop0
192.168.1.255/32    Direct 0 0              192.168.1.1      GE0/0
224.0.0.0/4         Direct 0 0              0.0.0.0           NULL0
224.0.0.0/24        Direct 0 0              0.0.0.0           NULL0
255.255.255.255/32 Direct 0 0              127.0.0.1         InLoop0
[R1]

```

```

[R2]dis ip routing-table

Destinations : 21      Routes : 21

Destination/Mask    Proto  Pre Cost       NextHop           Interface
0.0.0.0/32          Direct 0 0              127.0.0.1         InLoop0
1.0.0.0/8           RIP    100 2              10.0.0.6          GE0/1
2.0.0.0/8           RIP    100 1              10.0.0.6          GE0/1
3.3.3.3/32          Direct 0 0              127.0.0.1         InLoop0
10.0.0.0/30         RIP    100 1              10.0.0.6          GE0/1
10.0.0.4/30         Direct 0 0              10.0.0.5          GE0/1
10.0.0.4/32         Direct 0 0              10.0.0.5          GE0/1
10.0.0.5/32         Direct 0 0              127.0.0.1         InLoop0
10.0.0.7/32         Direct 0 0              10.0.0.5          GE0/1
127.0.0.0/8         Direct 0 0              127.0.0.1         InLoop0
127.0.0.0/32        Direct 0 0              127.0.0.1         InLoop0
127.0.0.1/32        Direct 0 0              127.0.0.1         InLoop0
127.255.255.255/32 Direct 0 0              127.0.0.1         InLoop0
172.16.1.0/24       Direct 0 0              172.16.1.1       GE0/0
172.16.1.0/32       Direct 0 0              172.16.1.1       GE0/0
172.16.1.1/32       Direct 0 0              127.0.0.1         InLoop0
172.16.1.255/32     Direct 0 0              172.16.1.1       GE0/0
192.168.1.0/24      RIP    100 2              10.0.0.6          GE0/1
224.0.0.0/4         Direct 0 0              0.0.0.0           NULL0
224.0.0.0/24        Direct 0 0              0.0.0.0           NULL0
255.255.255.255/32 Direct 0 0              127.0.0.1         InLoop0
[R2]

```

```
[FW1]dis ip routing-table
Destinations : 21      Routes : 21

Destination/Mask    Proto  Pre Cost       NextHop           Interface
0.0.0.0/32          Direct  0  0             127.0.0.1         InLoop0
1.0.0.0/8           RIP    100 1             10.0.0.1          GE1/0/2
2.2.2.2/32         Direct  0  0             127.0.0.1         InLoop0
3.0.0.0/8           RIP    100 1             10.0.0.5          GE1/0/3
10.0.0.0/30         Direct  0  0             10.0.0.2          GE1/0/2
10.0.0.0/32         Direct  0  0             10.0.0.2          GE1/0/2
10.0.0.2/32         Direct  0  0             127.0.0.1         InLoop0
10.0.0.3/32         Direct  0  0             10.0.0.2          GE1/0/2
10.0.0.4/30         Direct  0  0             10.0.0.6          GE1/0/3
10.0.0.4/32         Direct  0  0             10.0.0.6          GE1/0/3
10.0.0.6/32         Direct  0  0             127.0.0.1         InLoop0
10.0.0.7/32         Direct  0  0             10.0.0.6          GE1/0/3
127.0.0.0/8         Direct  0  0             127.0.0.1         InLoop0
127.0.0.0/32        Direct  0  0             127.0.0.1         InLoop0
127.0.0.1/32        Direct  0  0             127.0.0.1         InLoop0
127.255.255.255/32 Direct  0  0             127.0.0.1         InLoop0
172.16.0.0/16       RIP    100 1             10.0.0.5          GE1/0/3
192.168.1.0/24      RIP    100 1             10.0.0.1          GE1/0/2
224.0.0.0/4         Direct  0  0             0.0.0.0           NULL0
224.0.0.0/24        Direct  0  0             0.0.0.0           NULL0
255.255.255.255/32 Direct  0  0             127.0.0.1         InLoop0
[FW1]
```

至此，F1060路由模式典型组网配置案例2（RIP）已完成！