

## 组网及说明

为了能够实时的收取交换机的syslog信息，需要在交换机部署info-center，同时在IMC纳管相应的设备，即可实现实时收取交换机的syslog信息。

IMC版本为PLAT 7.3 E0506P03

S6520的版本如下：

H3C Comware Software, Version 7.1.070, Release 1110P02

Copyright (c) 2004-2018 New H3C Technologies Co., Ltd. All rights reserved.

H3C S6520X-54QC-EI uptime is 30 weeks, 1 day, 16 hours, 33 minutes

Last reboot reason : Cold reboot

Boot image: flash:/s6520x-cmw710-boot-r1110p02.bin

Boot image version: 7.1.070, Release 1110P02

Compiled Aug 14 2018 11:00:00

System image: flash:/s6520x-cmw710-system-r1110p02.bin

System image version: 7.1.070, Release 1110P02

Compiled Aug 14 2018 11:00:00

Slot 1:

Uptime is 30 weeks,1 day,16 hours,33 minutes

S6520X-54QC-EI with 2 Processors

BOARD TYPE: S6520X-54QC-EI

DRAM: 2048M bytes

FLASH: 1024M bytes

PCB 1 Version: VER.A

Bootrom Version: 105

CPLD 1 Version: 001

CPLD 2 Version: 003

Release Version: H3C S6520X-54QC-EI-1110P02

Patch Version : None

Reboot Cause : ColdReboot

[SubSlot 0] 48SFP Plus + 2QSFP Plus

[SubSlot 1] 1/2.5/5G BASE-T

[SubSlot 2] 1/2.5/5G BASE-T

Slot 2:

Uptime is 0 weeks,0 days,19 hours,1 minute

S6520X-54QC-EI with 2 Processors

BOARD TYPE: S6520X-54QC-EI

DRAM: 2048M bytes

FLASH: 1024M bytes

PCB 1 Version: VER.A

Bootrom Version: 105

CPLD 1 Version: 001

CPLD 2 Version: 003

Release Version: H3C S6520X-54QC-EI-1110P02

Patch Version : None

Reboot Cause : IRFMergeReboot

[SubSlot 0] 48SFP Plus + 2QSFP Plus

[SubSlot 1] 1/2.5/5G BASE-T

[SubSlot 2] 1/2.5/5G BASE-T

## 配置步骤

S6520 syslog部署：


info-center enable

info-center loghost 10.190.8.7


IMC纳管S6520交换机:



在IMC的“告警”-“syslog管理”-“浏览syslog”通过搜索设备的IP，即可看到该交换机发送上来的syslog:

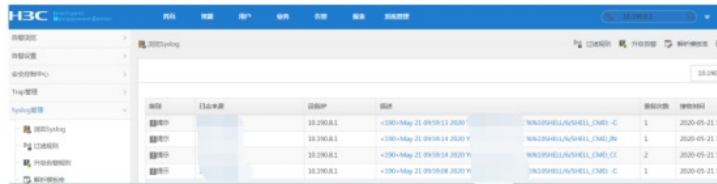

通过点击“描述”下的信息，可以查看到具体的syslog信息:

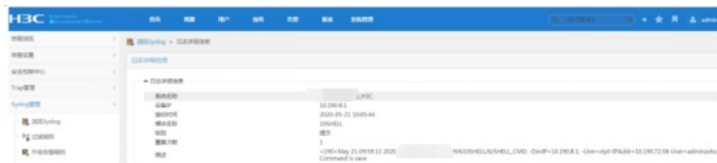

至此，S6520交换机syslog典型组网配置案例已完成!

配置关键点