

组网及说明

1 配置需求或说明


1.1 适用产品系列

本案例适用于如S7006、S7503E、S7506E、S7606、S10510、S10508等S7000、S7500E、S10500系列，且软件版本是V5的交换机

1.1 配置需求

公司内部部署了一台组播源，为保证终端能正常接收组播源传输的业务，需在所经交换机上开启组播功能。

2 组网图

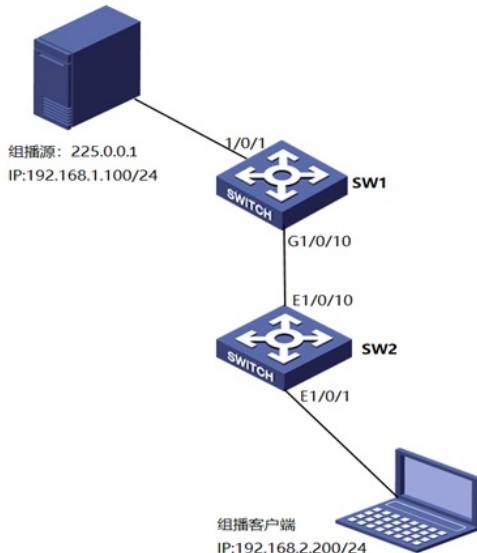

配置步骤

3 配置步骤

3.1 配置SW1的IP地址和互联路由

```
<H3C>system-view
#新建互联VLAN10
[H3C]vlan 10
#将10口加入到VLAN10
[H3C]interface Ethernet1/0/10
[H3C-Ethernet1/0/10]port access vlan 10
[H3C-Ethernet1/0/10]quit
#配置交换机间互联地址
[H3C]interface Vlan-interface10
[H3C-Vlan-interface10]ip address 172.16.10.1 255.255.255.0
[H3C-Vlan-interface10]quit
#配置与组播源互联地址
[H3C]interface Vlan-interface1
[H3C-Vlan-interface1]ip address 192.168.1.1 255.255.255.0
[H3C-Vlan-interface1]quit
#配置组播源与组播客户端互联路由
[H3C]ip route-static 192.168.2.0 255.255.255.0 172.16.10.2
```

3.2 SW1上开启组播路由功能，接口下使能PIM DM

```
#开启组播路由功能
[H3C]multicast routing-enable
#设备互联接口使能PIM-DM功能
[H3C]interface Vlan-interface10
[H3C-Vlan-interface10]pim dm
```

```

[H3C-Vlan-interface10]quit
#连接组播源接口使能PIM功能
[H3C]interface Vlan-interface1
[H3C-Vlan-interface1]pim dm
[H3C-Vlan-interface1]quit
[H3C]save
配置SW2的IP地址和互联路由
<H3C>system-view
#新建互联VLAN10
[H3C]vlan 10
#将10口加入到VLAN10
[H3C]interface GigabitEthernet 1/0/10
[H3C-GigabitEthernet1/0/10]port access vlan 10
[H3C-GigabitEthernet1/0/10]quit
#配置交换机间互联地址
[H3C]interface Vlan-interface10
[H3C-Vlan-interface10]ip address 172.16.10.2 255.255.255.0
[H3C-Vlan-interface10]quit
#配置与组播客户端互联地址
[H3C]interface Vlan-interface1
[H3C-Vlan-interface1]ip address 192.168.2.1 255.255.255.0
[H3C-Vlan-interface1]quit
#配置组播源与组播客户端互联路由
[H3C]ip route-static 192.168.1.0 255.255.255.0 172.16.10.1

```

3.3 SW2上开启组播路由功能，设备互联接口使能PIM-DM，组播接受者接口使能IGMP


```

#开启组播路由功能
[H3C]multicast routing-enable
#互联接口接口使能PIM-DM功能
[H3C]interface Vlan-interface10
[H3C-Vlan-interface10]pim dm
[H3C-Vlan-interface10]quit
#连接组播客户端接口使能IGMP功能
[H3C]interface Vlan-interface1
[H3C-Vlan-interface1]igmp enable
[H3C-Vlan-interface1]quit
[H3C]save

```

3.4 检查配置结果

组播源：

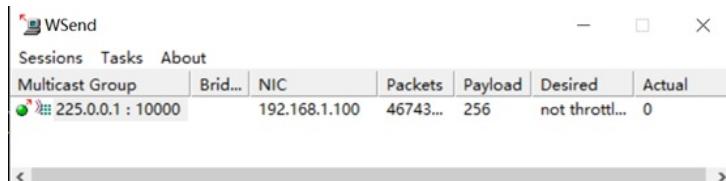

通过使用display pim routing-table命令查看SW1 PIM路由表信息。

dis pim routing-table

VPN-Instance: public net

Total 0 (*, G) entry; 1 (S, G) entry

(192.168.1.100, 225.0.0.1)

Protocol: pim-dm, Flag: LOC ACT

UpTime: 00:00:17

Upstream interface: Vlan-interface1

Upstream neighbor: NULL

RPF prime neighbor: NULL


Downstream interface(s) information:

Total number of downstreams: 1

1: Vlan-interface10

Protocol: pim-dm, UpTime: 00:00:07, Expires: never

组播客户端：

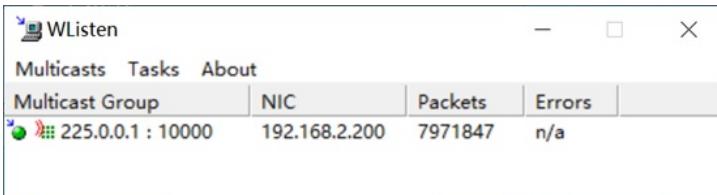

通过使用display pim routing-table命令查看SW2 PIM路由表信息。

<H3C>dis pim routing-table

VPN-Instance: public net

Total 2 (*, G) entries; 1 (S, G) entry

(*, 225.0.0.1)

Protocol: pim-dm, Flag: WC EXT

UpTime: 00:05:45

Upstream interface: NULL

Upstream neighbor: NULL

RPF prime neighbor: NULL

Downstream interface(s) information: None

(192.168.1.100, 225.0.0.1)

Protocol: pim-dm, Flag: EXT ACT

UpTime: 00:08:12

Upstream interface: Vlan-interface10

Upstream neighbor: 172.16.10.1

RPF prime neighbor: 172.16.10.1

Downstream interface(s) information: None

(*, 239.255.255.250)

Protocol: pim-dm, Flag: WC EXT

UpTime: 00:05:42

Upstream interface: NULL

Upstream neighbor: NULL

RPF prime neighbor: NULL

Downstream interface(s) information: None

配置关键点