
Wireless 龚训杰 2020-10-12 Published

Wireless Connection.

AP===Clients

Problem Description

When we connect to a V5 wireless network ,it prompts that we cannot connect to this network:

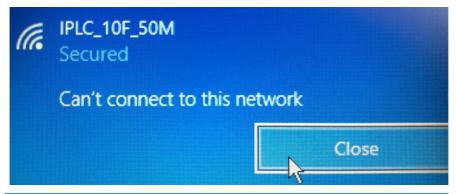

The configuration is as below:

wlan service-template 1 crypto

ssid service

bind WLAN-ESS 1

authentication-method open-system

cipher-suite tkip

security-ie wpa

service-template enable

interface WLAN-ESS1

port link-type hybrid

undo port hybrid vlan 1

port hybrid vlan 100 untagged

port hybrid pvid vlan 100

mac-vlan enable

port-security port-mode psk

port-security tx-key-type 11key

port-security preshared-key pass-phrase 12345678

It was found that the customer had missed a command:

port-security enable

Add the command:

port-security enable