


知 MSR810 dual 4G link hot backup typical configuration

Routers 龚训杰 2020-12-16 Published

Network Topology

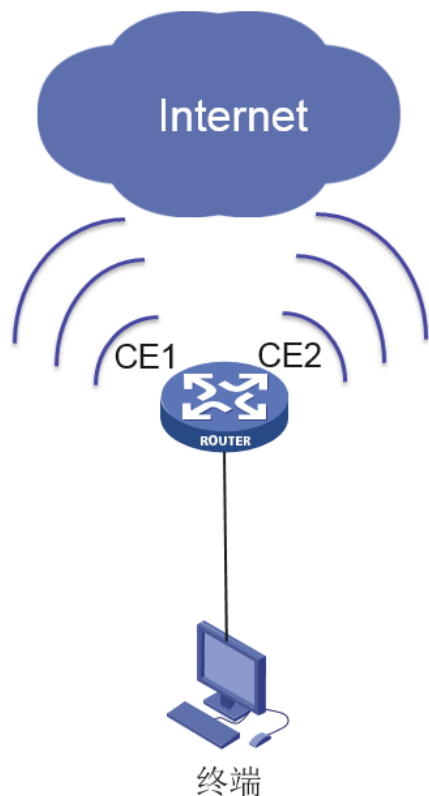

Implement CE1 as the main interface and CE2 as the backup interface

Configuration Steps

```
nqa entry 1 1
type icmp-echo
destination ip 8.8.8.8
frequency 2000
probe timeout 1500
```

```
reaction 1 checked-element probe-fail threshold-type consecutive 5 action-type trigger-only
```

```
nqa schedule 1 1 start-time now lifetime forever
track 1 nqa entry 1 1 reaction 1
```

```
ip route-static 0.0.0.0 0 Eth-channel1/0:0 track 1 preference 5
ip route-static 0.0.0.0 0 Eth-channel2/0:0 preference 100
```

Key Configuration

```
ip route-static 0.0.0.0 0 Eth-channel1/0:0 track 1 preference 5
ip route-static 0.0.0.0 0 Eth-channel2/0:0 preference 100
```