


知 利用标杆神器升级设备

陈立 2017-07-01 发表

通过标杆的神器升级设备

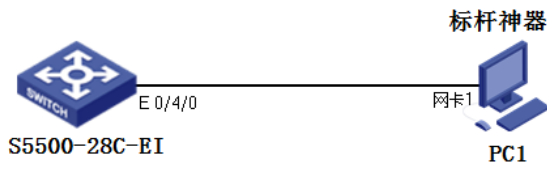

目前版本:

```
<H3C>dis version
H3C Comware Platform Software
Comware Software, Version 5.20, Release 2221P10
Copyright (c) 2004-2015 Hangzhou H3C Tech. Co., Ltd. All rights reserved.
H3C S5500-28C-EI uptime is 0 week, 0 day, 0 hour, 6 minutes
```

H3C S5500-28C-EI with 1 Processor
256M bytes SDRAM
32768K bytes Flash Memory

Hardware Version is REV.C
CPLD Version is 002
Bootrom Version is 721
[SubSlot 0] 24GE+4SFP Hardware Version is REV.C









<H3C>

#Apr 26 12:39:51:503 2000 H3C DEVM/1/REBOOT:

Reboot device by command.

%Apr 26 12:39:51:595 2000 H3C DEVM/5/SYSTEM_REBOOT: System is rebooting now.

System is rebooting; can # 39;t respond to your command.

System is rebooting; can # 39;t respond to your command.

System is rebooting; can # 39;t respond to your command.

Starting.....

```
*****
*
*      H3C S5500-28C-EI BOOTROM, Version 721      *
*
*****
```

Copyright (c) 2004-2013 Hangzhou H3C Tech. Co., Ltd.

Creation date : Nov 12 2013, 01:59:13

CPU Clock Speed : 533MHz

BUS Clock Speed : 133MHz

Memory Size : 256MB

Mac Address : 000fe28cd787

Press Ctrl-B to enter Boot Menu... 0

Auto-booting...

Decompress

Image.....

