


知 MSR36做AFT 一个ipv6地址是否可以重复使用

IPv6 刘安娜 2022-04-06 发表

问题描述

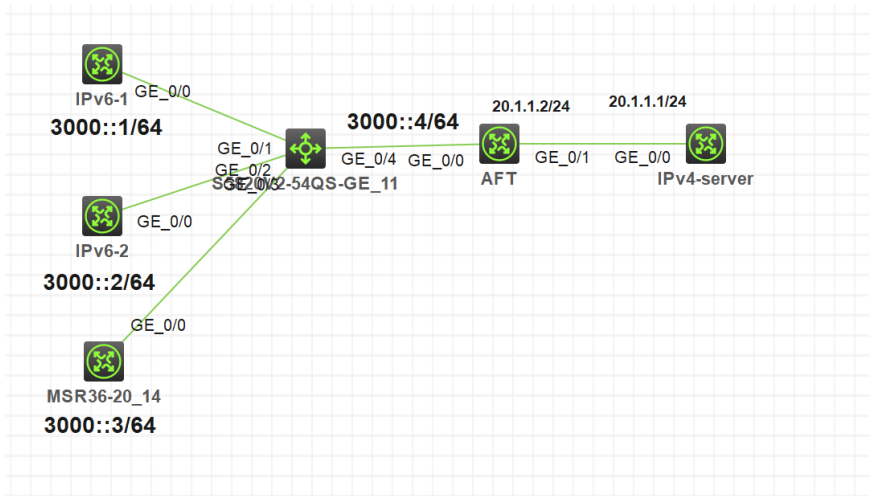

该组网环境下，配置aft地址池里只有一个地址30.1.1.1，是否可以多个终端同时访问ipv4服务器

解决方法

```
[H3C]display aft session ipv4 verbose
```

Slot 0:

Initiator:

```
Source IP/port: 30.1.1.1/10
Destination IP/port: 20.1.1.1/2048
DS-Lite tunnel peer: -
VPN instance/VLAN ID/Inline ID: -/-/
Protocol: ICMP(1)
Inbound interface: GigabitEthernet0/0
```

Responder:

```
Source IP/port: 20.1.1.1/10
Destination IP/port: 30.1.1.1/0
DS-Lite tunnel peer: -
VPN instance/VLAN ID/Inline ID: -/-/
Protocol: ICMP(1)
Inbound interface: GigabitEthernet0/1
```

State: ICMP_REPLY

Application: ICMP

Rule ID: -/-/

Rule name:

Start time: 2022-03-05 11:02:04 TTL: 29s

Initiator->Responder: 0 packets 0 bytes

Responder->Initiator: 0 packets 0 bytes

Initiator:

```
Source IP/port: 30.1.1.1/9
Destination IP/port: 20.1.1.1/2048
DS-Lite tunnel peer: -
VPN instance/VLAN ID/Inline ID: -/-/
Protocol: ICMP(1)
Inbound interface: GigabitEthernet0/0
```

Responder:

```
Source IP/port: 20.1.1.1/9
Destination IP/port: 30.1.1.1/0
DS-Lite tunnel peer: -
VPN instance/VLAN ID/Inline ID: -/-/
Protocol: ICMP(1)
Inbound interface: GigabitEthernet0/1
```

State: ICMP_REPLY

Application: ICMP

Rule ID: -/-/

Rule name:

Start time: 2022-03-05 11:02:02 TTL: 29s

Initiator->Responder: 0 packets 0 bytes

Responder->Initiator: 0 packets 0 bytes

Initiator:

```
Source IP/port: 30.1.1.1/8
Destination IP/port: 20.1.1.1/2048
DS-Lite tunnel peer: -
VPN instance/VLAN ID/Inline ID: -/-/
Protocol: ICMP(1)
Inbound interface: GigabitEthernet0/0
```

Responder:

```
Source IP/port: 20.1.1.1/8
Destination IP/port: 30.1.1.1/0
DS-Lite tunnel peer: -
VPN instance/VLAN ID/Inline ID: -/-/
Protocol: ICMP(1)
```

Inbound interface: GigabitEthernet0/1

State: ICMP_REPLY

Application: ICMP

Rule ID: -/-

Rule name: