


知 tm使用smartmc纳管tc失败

配置优化 王昕宇 2022-05-31 发表

组网及说明

设备型号: tm: MSR2600-10-X1-WiNe version 7.1.064, Release
tm端无法纳管tc

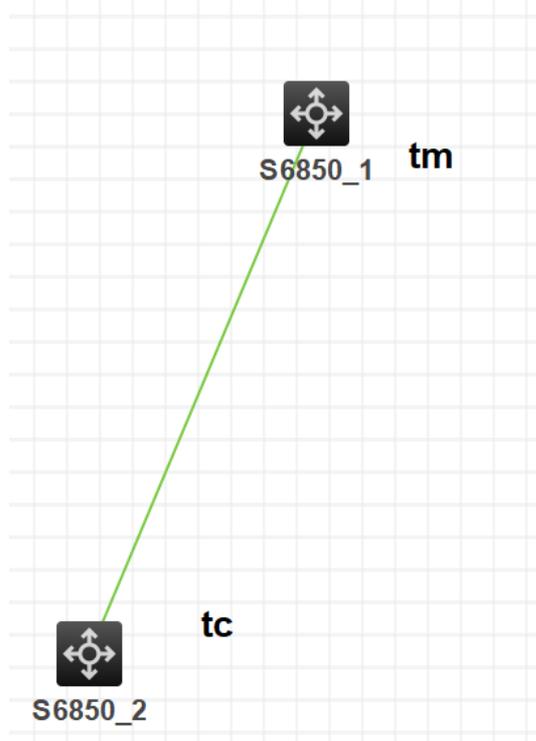

告警信息

关键配置

```
#
smartmc tm username pnnxs password cipher $c$3$awAmeb2XM08Mkoibr8zDuuxL/Y+GikcmeB4ibp0= enable
smartmc topology-refresh interval 60
smartmc backup configuration max-number 5
undo smartmc backup configuration interval
undo smartmc auto-replace enable
smartmc resource-monitor interval 1
smartmc resource-monitor max-age 24
undo smartmc auto-link-aggregation enable
```

TC端:

debugging smartmc all

an 5 18:41:15:768 2013 PNNXS_HX-Swicth NETCONF/6/SOAP_XML_LOGIN: admin from A.A.A.A
(TM地址) login failed.

问题描述

TC端:

debugging smartmc all

an 5 18:41:15:768 2013 PNNXS_HX-Swifth NETCONF/6/SOAP_XML_LOGIN: admin from A.A.A.A

(TM地址) login failed.

过程分析

tm 和tc只能用vlan 1 纳管，且两边都使用账号/密码为admin/admin

smartmc tm username 这条命令修改账号密码为admin。admin后，纳管成功，改成自定义的账号密码

无法纳管成功

