

组网及说明

1 配置需求及说明

1.1 适用的产品系列


本案例适用于如F5080、F5060、F5030、F5000-M等F5000、F5000-X系列的防火墙

1.2 配置需求及实现的效果

防火墙A与防火墙B堆叠后上联交换机A下联交换机B，应用户业务需求：

- 1、防火墙做主备运行
- 2、正常情况下业务流量全部负载在FWA，FWA出现故障后流量全部切到FWB运行

2 组网图

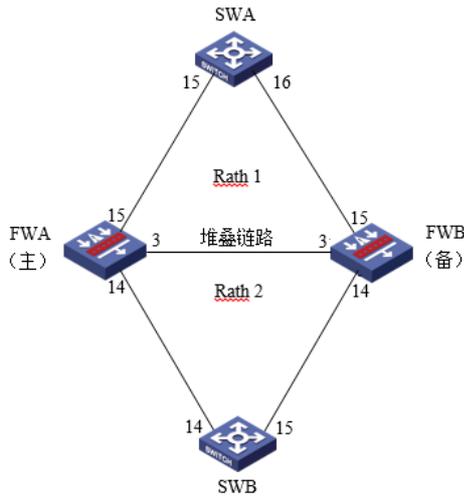

配置步骤

3 配置步骤

3.1 SWA配置

3.1.1 配置交换机下联防火墙接口

交换机配置vlan 10将下联防火墙的15和16接口加入vlan10，并创建vlan10接口IP地址为1.1.1.1

```
system
[H3C]vlan10
[H3C-vlan10]port GigabitEthernet 1/0/15 GigabitEthernet 1/0/16
[H3C]interface Vlan-interface 10
[H3C-Vlan-interface10]ip address 1.1.1.1 24
```

配置到内网网段的回程路由，下一跳为防火墙Reth1接口地址。

```
[H3C]ip route-static 2.2.2.0 24 1.1.1.2
```

注：实际组网中应该将内网网段全部添加进回程路由。

3.2 SWB配置

3.2.1 配置交换机上联防火墙接口

交换机配置vlan 20将下联防火墙的14和15接口加入vlan20，并创建vlan20接口IP地址为2.2.2.1。

```
system
[H3C]vlan20
[H3C-vlan20]port GigabitEthernet 1/0/14 GigabitEthernet 1/0/15
[H3C]interface Vlan-interface 20
[H3C-Vlan-interface20]ip address 2.2.2.1 24
```

配置默认路由到到防火墙Reth2接口地址。

```
[H3C]ip route-static 0.0.0.0 0 2.2.2.2
```

3.3 防火墙配置

3.3.1 FWA与FWB建立堆叠

具体配置可参考防火墙虚拟化配置举例，本章不做介绍。

3.3.2 配置冗余接口关联上下行物理端口

1. 创建Reth1接口

创建Reth1接口配置IP地址为1.1.1.2/24，并配置1/0/15成员优先级为255，2/0/15成员优先级为50。

```
system-view
[H3C] interface reth 1
[H3C-Reth1] ip address 1.1.1.2 24
```

```
[H3C-Reth1] member interface gigabitethernet 1/0/15 priority 255
[H3C-Reth1] member interface gigabitethernet 2/0/15 priority 50
[H3C-Reth1] quit
```

## 2. 创建Reth2接口

创建Reth2接口配置IP地址为2.2.2.2/24，并配置1/0/14成员优先级为255，2/0/14成员优先级为50。

```
system-view
[H3C] interface reth 1
[H3C-Reth1] ip address 2.2.2.2 24
[H3C-Reth1] member interface gigabitethernet 1/0/14 priority 255
[H3C-Reth1] member interface gigabitethernet 2/0/14 priority 50
[H3C-Reth1] quit
```

### 3.3.3 配置冗余接口关联上下行物理端口

配置track检测上下行端口的物理状态

```
[H3C] track 1 interface gigabitethernet 1/0/15 physical
[H3C-track-1] quit
[H3C] track 2 interface gigabitethernet 1/0/14 physical
[H3C-track-2] quit
[H3C] track 3 interface gigabitethernet 2/0/15 physical
[H3C-track-3] quit
[H3C] track 4 interface gigabitethernet 2/0/14 physical
[H3C-track-4] quit
```

### 3.3.4 配置冗余组关联冗余接口

#### 1. 创建节点1与防火墙A所有接口绑定

```
[H3C] redundancy group aaa
[H3C-redundancy-group-aaa] node 1
[H3C-redundancy-group-aaa-node1] bind slot 1
[H3C-redundancy-group-aaa-node1] priority 100
[H3C-redundancy-group-aaa-node1] track 1 interface gigabitethernet 1/0/15
[H3C-redundancy-group-aaa-node1] track 2 interface gigabitethernet 1/0/14
[H3C-redundancy-group-aaa-node1] quit
```

#### 2. 创建节点2与防火墙B所有接口绑定

```
[H3C-redundancy-group-aaa] node 2
[H3C-redundancy-group-aaa-node2] bind slot 2
[H3C-redundancy-group-aaa-node2] priority 50
[H3C-redundancy-group-aaa-node2] track 3 interface gigabitethernet 1/0/15
[H3C-redundancy-group-aaa-node2] track 4 interface gigabitethernet 1/0/14
[H3C-redundancy-group-aaa-node2] quit
```

### 3.3.5 将冗余接口加入冗余组

```
[H3C-redundancy-group-aaa] member interface reth 1
[H3C-redundancy-group-aaa] member interface reth 2
[H3C-redundancy-group-aaa] quit
```

### 3.3.6 开启会话热备

```
[H3C] session synchronization enable
```

### 3.3.7 安全策略配置

#### 1. 将Reth1加入安全域

将Reth加入Untrust区域

```
[H3C]security-zone name Untrust
[H3C-security-zone-Untrust]import interface Reth1
```

将Reth2加入trust区域

```
[H3C]security-zone name trust
[H3C-security-zone-trust]import interface Reth2
[H3C-security-zone-trust]quit
```

防火墙目前版本存在两套安全策略，请在放通安全策略前确认设备运行那种类型的安全策略？以下配置任选其一。

#### 2. 通过命令“display cu | in security-policy”如果查到命令行存在“security-policy disable”或者没有查到任何信息，则使用下面策略配置。

```
[H3C]display cu | in security-policy
security-policy disable
#创建对象策略pass。
[H3C]object-policy ip pass
[H3C-object-policy-ip-pass] rule 0 pass
[H3C-object-policy-ip-pass]quit
#创建Trust到Untrust域的域间策略调用pass策略。
[H3C]zone-pair security source Trust destination local
```

```
[H3C-zone-pair-security-Trust- local]object-policy apply ip pass
[H3C-zone-pair-security-Trust- local]quit
[H3C]zone-pair security source local destination Trust
[H3C-zone-pair-security-local -trust]object-policy apply ip pass
[H3C-zone-pair-security-local -trust]quit
[H3C]zone-pair security source Untrust destination local
[H3C-zone-pair-security-Untrust- local]object-policy apply ip pass
[H3C-zone-pair-security-Untrust- local]quit
[H3C]zone-pair security source local destination Untrust
[H3C-zone-pair-security-local -Untrust]object-policy apply ip pass
[H3C-zone-pair-security-local -Untrust]quit
[H3C]zone-pair security source Trust destination Untrust
[H3C-zone-pair-security-Trust -Untrust]object-policy apply ip pass
[H3C-zone-pair-security-Trust -Untrust]quit
```

3. 通过命令“display cu | in security-policy”如果查到命令行存在“security-policy ip”并且没有查到“security-policy disable”，则使用下面策略配置。

```
[H3C]display cu | in security-policy
security-policy ip
创建安全策略并放通local到trust和trust到local的安全策略。
[H3C]security-policy ip
[H3C-security-policy-ip]rule 10 name test
[H3C-security-policy-ip-10-test]action pass
[H3C-security-policy-ip-10-test]source-zone local
[H3C-security-policy-ip-10-test]source-zone Trust
[H3C-security-policy-ip-10-test]source-zone Untrust
[H3C-security-policy-ip-10-test]destination-zone local
[H3C-security-policy-ip-10-test]destination-zone Trust
[H3C-security-policy-ip-10-test]destination-zone Untrust
[H3C-security-policy-ip-10-test]quit
```

#### 4 检验配置结果

##### 4.1.1 正常时查看冗余组状态

查看冗余组状态，可以看到节点1为主节点。

```
[F1060]dis redundancy group bin
Redundancy group bin (ID 1):
  Node ID      Slot      Priority  Status      Track weight
  1             Slot1     100      Primary     255
  2             Slot2     50       Secondary   255

Preempt delay time remained      : 0    min
Preempt delay timer setting      : 1    min
Remaining hold-down time         : 0    sec
Hold-down timer setting          : 1    sec
Manual switchover request        : No
```

Member interfaces:

Reth1                                  Reth2

Node 1:

```
Track info:
  Track      Status      Reduced weight      Interface
  1           Positive    255                 GE1/0/15
  2           Positive    255                 GE1/0/14
```

Node 2:

```
Track info:
  Track      Status      Reduced weight      Interface
  3           Positive    255                 GE2/0/15
  4           Positive    255                 GE2/0/14
```

显示Reth信息。可以看到Reth1和Reth2中优先级高的成员接口处于激活状态。

```
[F1060]dis reth interface Reth 1
Reth1 :
  Redundancy group : bin
  Member           Physical status      Forwarding status      Presence status
  GE1/0/15         UP                   Active                 Normal
  GE2/0/15         UP                   Inactive               Normal
[F1060]dis reth interface Reth 2
Reth2 :
  Redundancy group : bin
  Member           Physical status      Forwarding status      Presence status
  GE1/0/14         UP                   Active                 Normal
  GE2/0/14         UP                   Inactive               Normal
[F1060]
```

##### 4.1.2 当FWA宕机后时查看冗余组状态

