

S6500系列交换机端口优先级的配置

一、组网需求:

与PC相连的端口g1/0/1属于VLAN 10, S6500交换机从端口接收报文后给报文打上VLAN标记, 并设置报文的VLAN标记中的802.1p优先级采用接收端口的端口优先级来赋值, 此时用户配置端口的优先级为7。

二、组网图:

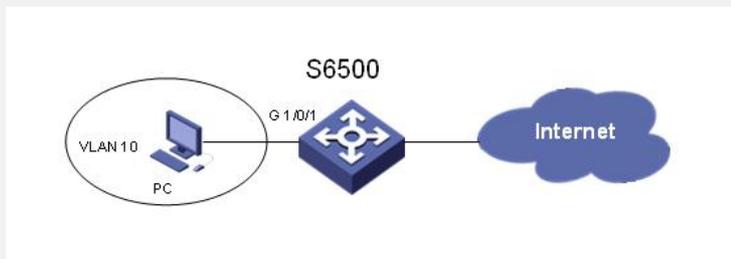


图1. 组网图

三、配置步骤:

1) 配置端口所属的VLAN

```
<S6500> system-view
```

System View: return to User View with Ctrl+Z.

```
[S6500] vlan 10
```

```
[S6500-vlan10] port GigabitEthernet 1/0/1
```

```
[S6500-vlan10] quit
```

2) 进入需要配置的端口

```
[S6500] interface GigabitEthernet1/0/1
```

3) 配置指定端口的优先级

```
[S6500-GigabitEthernet1/0/1] undo priority
```

```
[S6500-GigabitEthernet1/0/1] priority 7
```