


知 H3C设备与思科做BFD配置案例

BFD 夏威夷 2019-11-24 发表

组网及说明

设备与思科做BFD使用控制报文方式做对接，以加快链路切换。

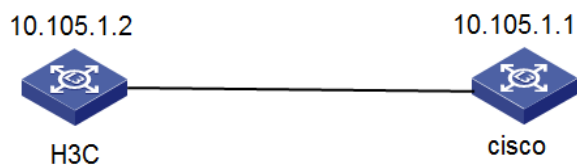

配置步骤

H3C配置：

```
int vlan 105
```

```
bfd min-transmit-interval 500
```

```
bfd min-receive-interval 500
```

```
bfd detect-multiplier 9
```

```
ip route-static 10.10.0.0 24 vlan 105 10.105.1.1 bfd control-packet
```

```
ip route-static 10.10.0.0 24 192.168.90.2 per 80
```

cisco配置：

```
configure terminal
```

```
interface G 2/0
```

```
ip address 192.168.1.1 255.255.255.0
```

```
bfd interval 500 min_rx 500 multiplier 9
```

```
ip route static bfd G 2/0 10.105.1.2
```

```
ip route 10.0.0.0 255.0.0.0 G 2/0 10.105.1.2
```

```
ip route 10.0.0.0 255.0.0.0 192.168.90.1 80
```

配置关键点

无