

# H3C G7 海光平台服务器通过 HDM 挂载镜像安装 Ubuntu Server 24.04 系统的安装方法

## 目录

|                         |   |
|-------------------------|---|
| 一. 适用范围与注意事项.....       | 1 |
| 二. 安装准备.....            | 1 |
| 1. 系统兼容性查询.....         | 1 |
| 2. 系统安装介质获取.....        | 2 |
| 3. 阵列配置.....            | 2 |
| 4. 连接 HDM 与启用远程控制台..... | 2 |
| 三. 安装步骤.....            | 2 |

### 一. 适用范围与注意事项

- 本文档旨在说明 H3C G7 海光平台系列服务器通过 HDM 安装系统的方法，并以 R4930 G7 服务器安装 Ubuntu Server 24.04 为例进行安装步骤说明。  
安装过程中您可能需要借助其他工具完成部分操作。如需了解详细介绍，请参考本文档<安装前准备>的内容查看。
- 本文所述安装过程如涉及挂载文件/文件夹（高级版），需要购买 HDM License，如想要使用此功能请联系经销商购买并在激活后使用。  
HDM License 的注册安装方法请参考：<https://zhiliao.h3c.com/Theme/details/232557>
- 如文中方法不适用或型号不匹配，可以通过下面导航链接查找适用文档：  
<https://zhiliao.h3c.com/Theme/details/208474>
- 提示：  
本文档中的信息（包括产品，软件版本和设置参数）仅作参考示例，具体操作与目标需求设置请以实际为准。  
本文档不定期更新维护，请以发布的最新版本为准。

### 二. 安装准备

1. 系统兼容性查询  
具体确认方法请参考：<https://zhiliao.h3c.com/Theme/details/207728>

## 2. 系统安装介质获取

具体方法请参考：<https://zhiliao.h3c.com/theme/details/232291>

## 3. 阵列配置

如果有配置阵列的需求，请在阵列配置完成后再安装系统。

具体阵列配置方法请参考：<https://zhiliao.h3c.com/Theme/details/208527>


## 4. 连接 HDM 与启用远程控制台

具体方法请参考：<https://zhiliao.h3c.com/theme/details/232282>


# 三. 安装步骤

## 1. 挂载系统安装介质（以 H5 KVM 为例）


### 1.1 登录 HDM 并在首页启动 H5 KVM 远程控制台。

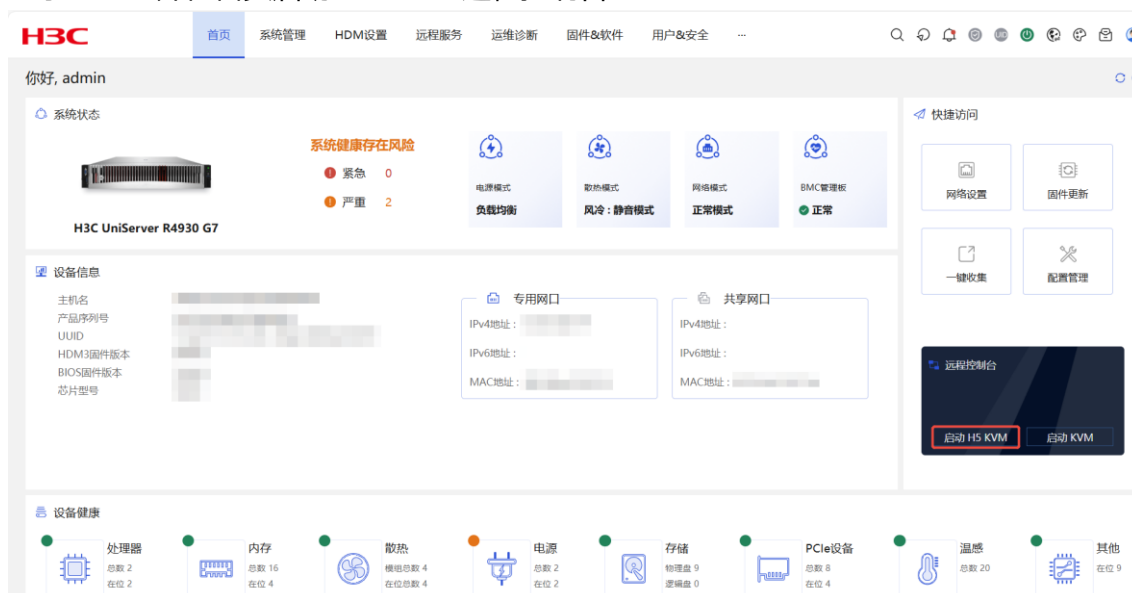

### 1.2 H5 KVM 界面打开后，点击右上方的**选择文件**。

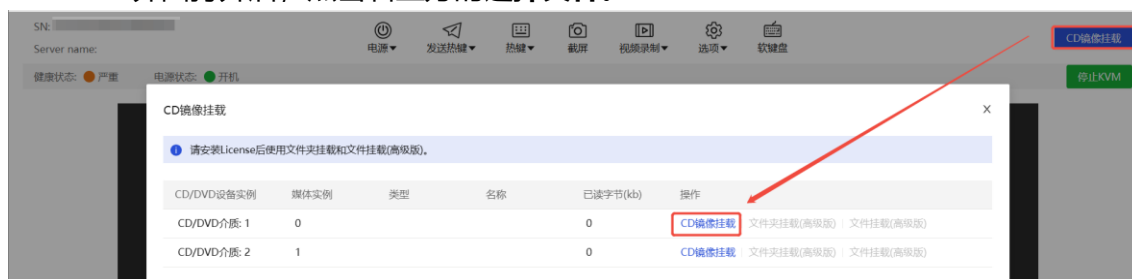

### 1.3 浏览到本地的镜像文件。

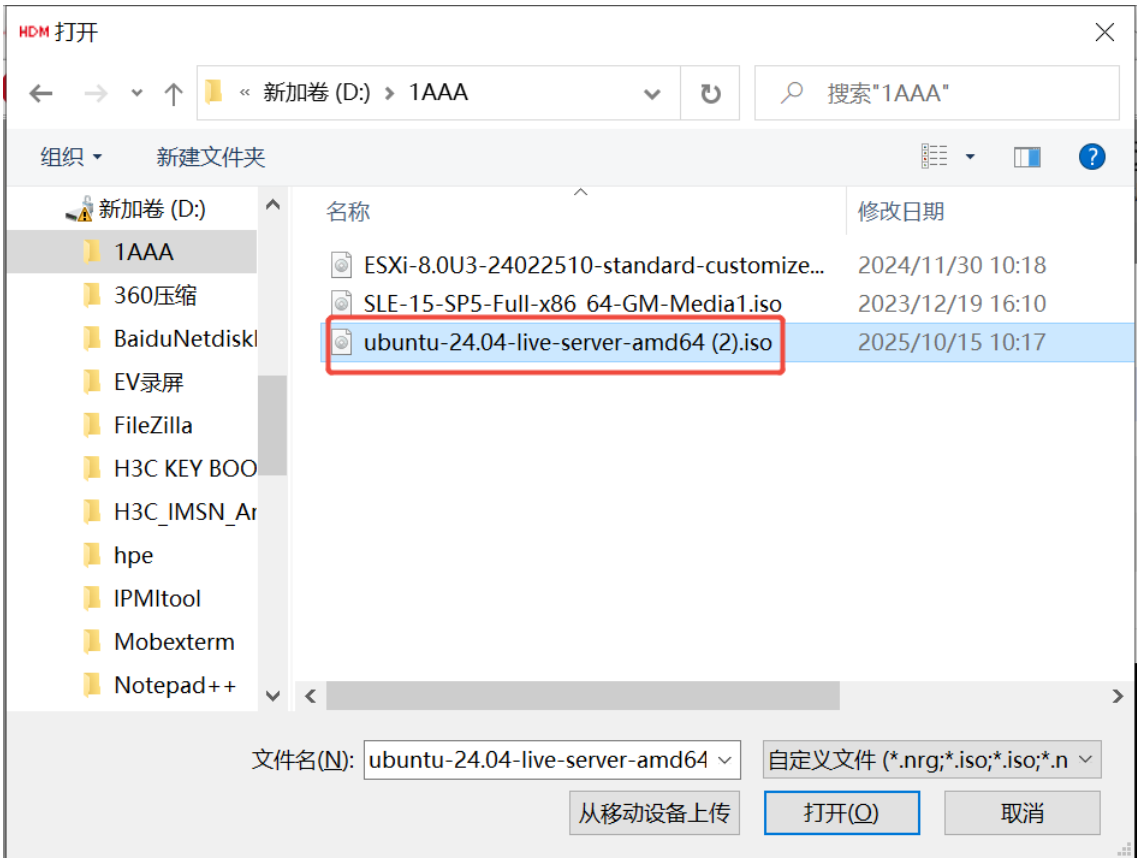

1.4 完成挂载。



注：文件读取进度可能不会一次性全部加载，待开始引导系统文件后加载进度将继续读取。

2. 引导系统安装

2.1 启动服务器，在开机自检界面按下 **F7**，选择启动项。




## 2.2 选择 OS 镜像所在的介质。


本例中通过远程控制台挂载虚拟媒体, 所以选择 **AMI Virtual CDROM 0**。




## 2.3 选择第一项 **Install Ubuntu Server** 后将开始 Ubuntu 系统的安装。

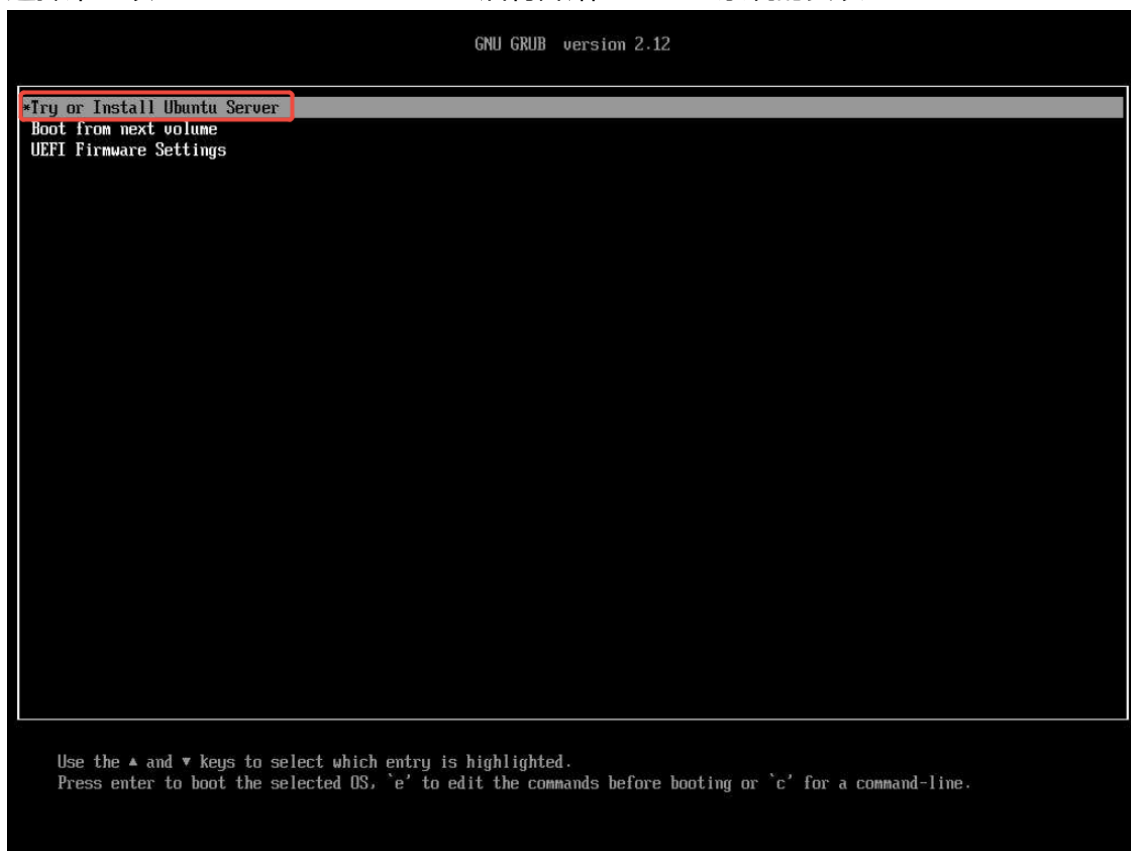


## 2.4 选择语言。

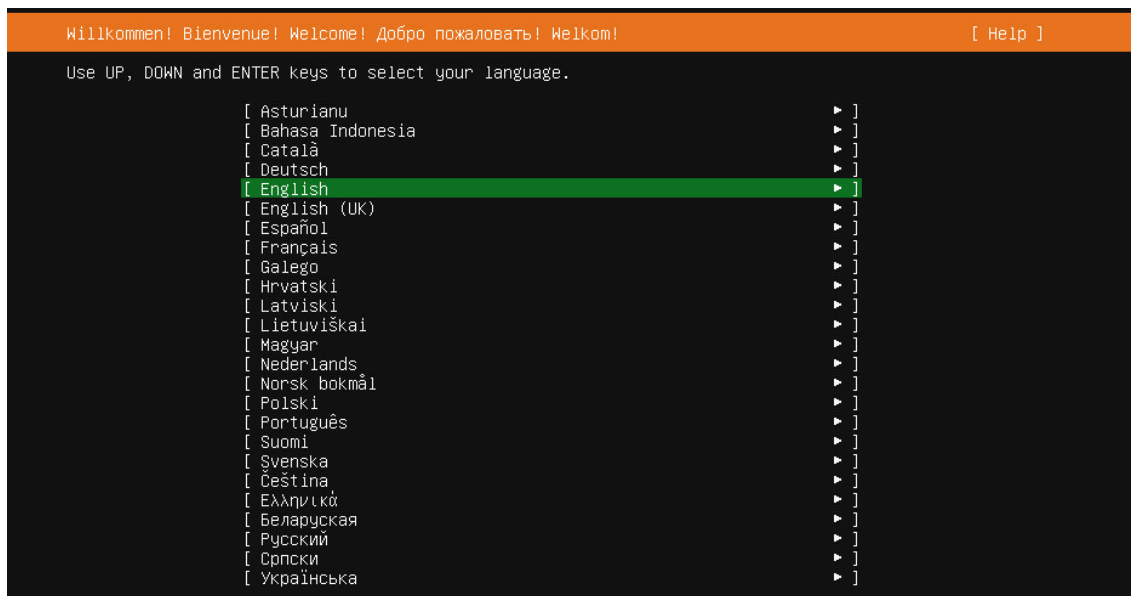


## 2.5 设置键盘布局，点击 **Done** 进入下一步。

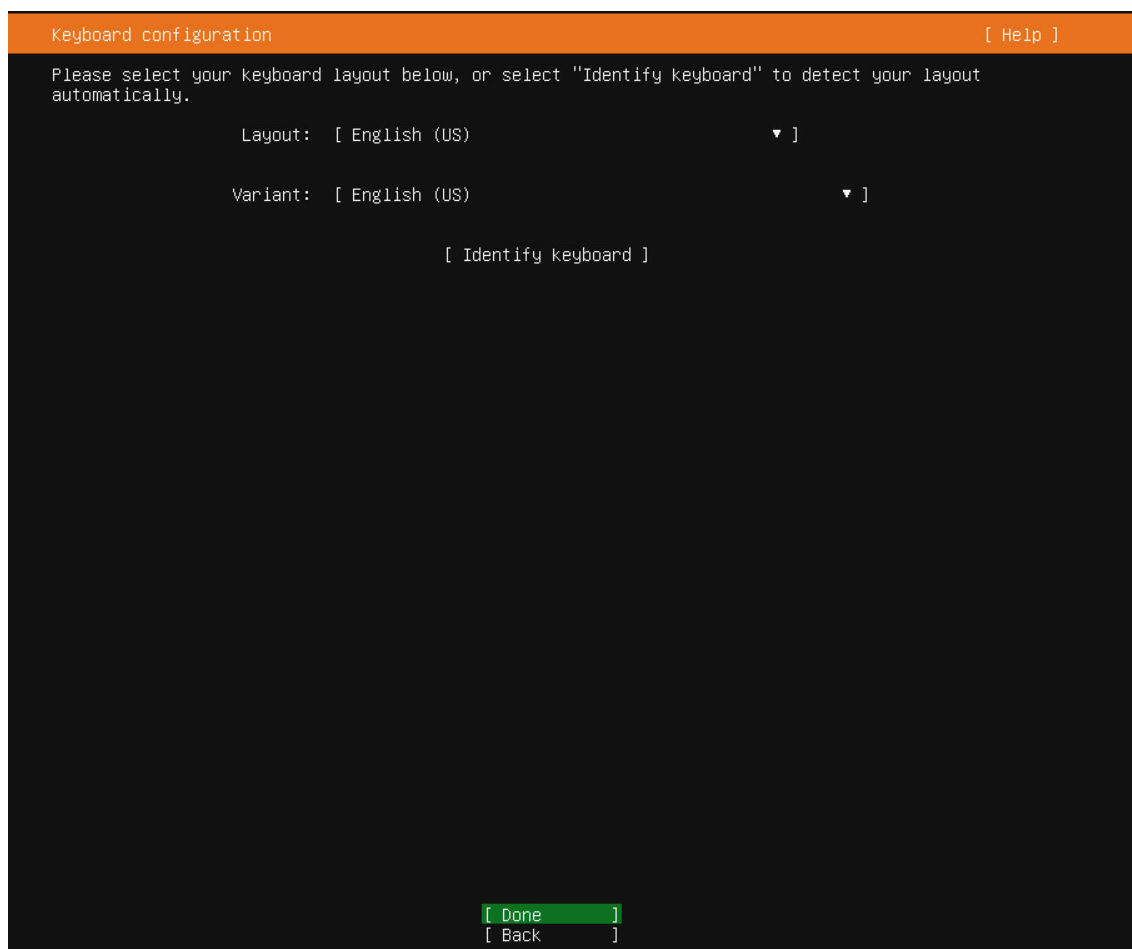


2.6 选择一个系统类型进行安装，回车 “Done” 进入下一步。

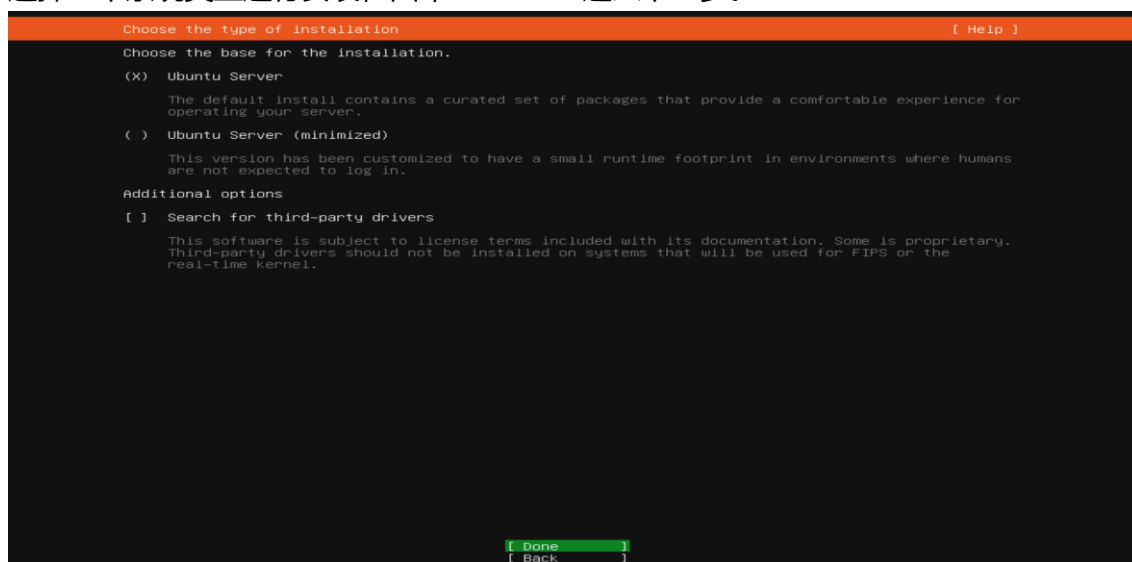

2.7 设置网络链接，选择 “Continue without network” 按<Enter>进入下一步。

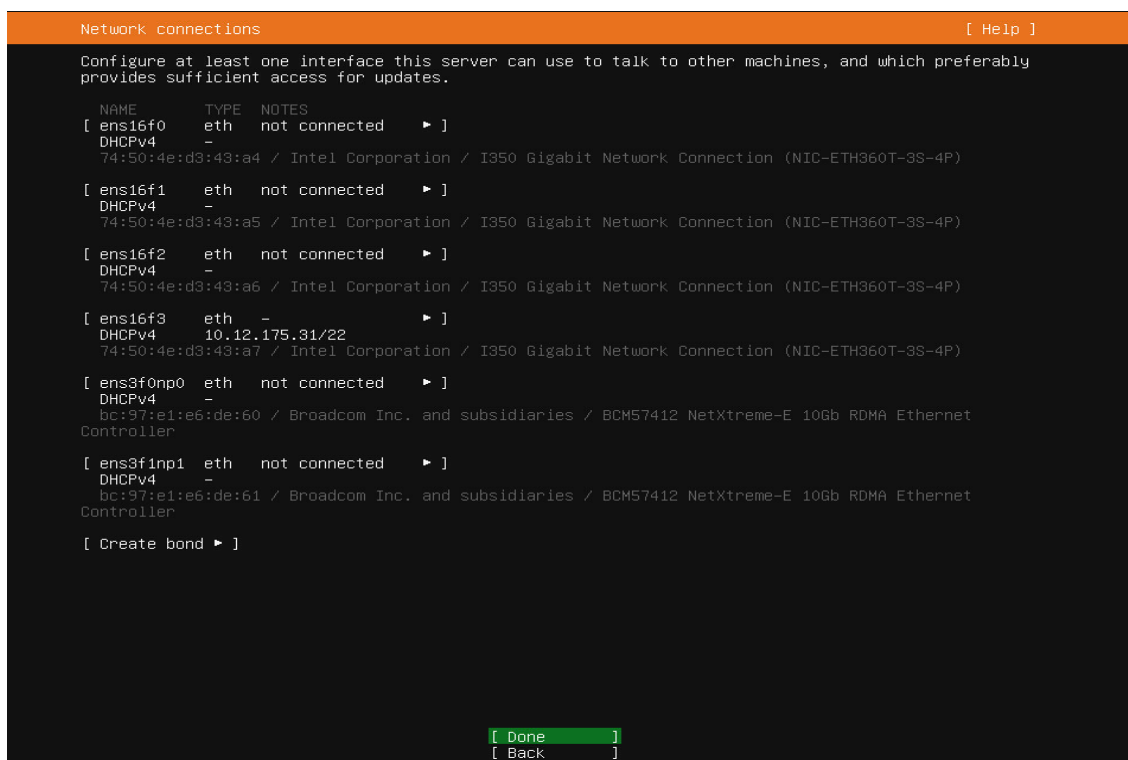


2.8 设置代理服务器，可以根据需要是否配置，不需要进行配置，选择“Done”按<Enter>键进入下一步即可。

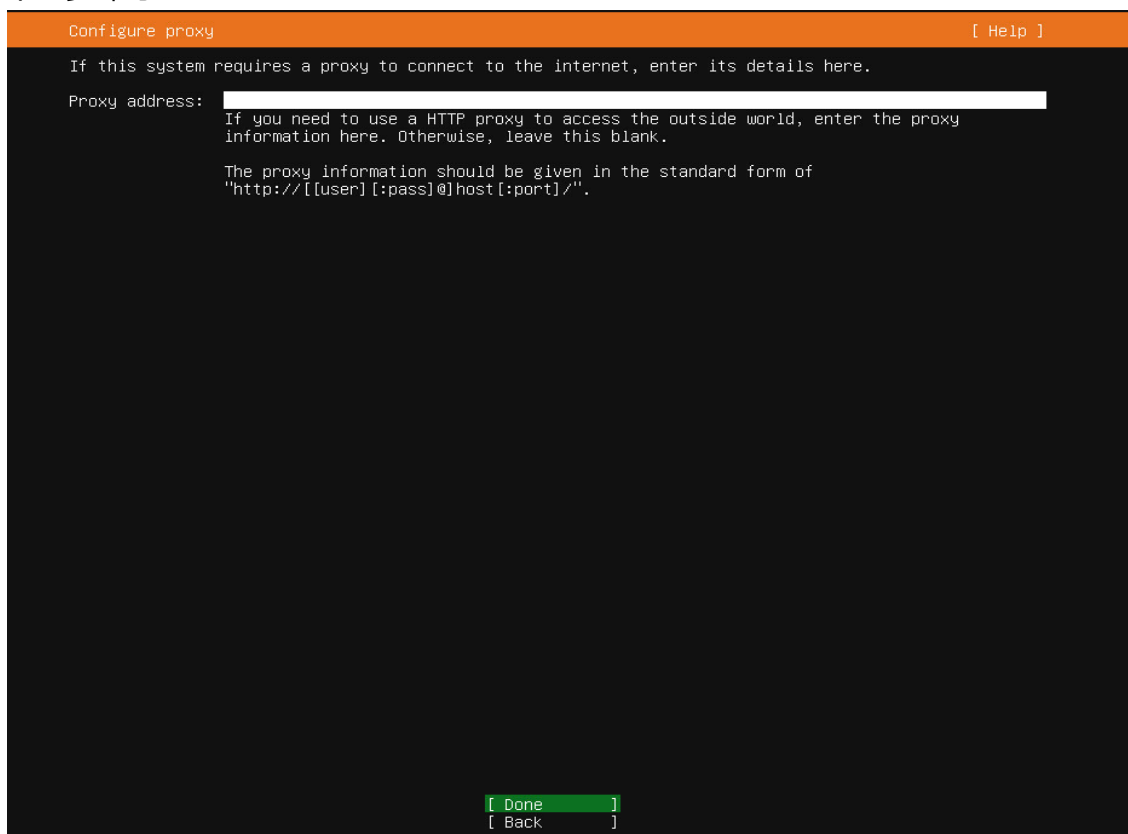


2.9 设置镜像源地址，在“Mirror address”输入框中输入镜像源地址，若无特殊要求默认后，选择

“Done” 按<Enter>键进入下一步。

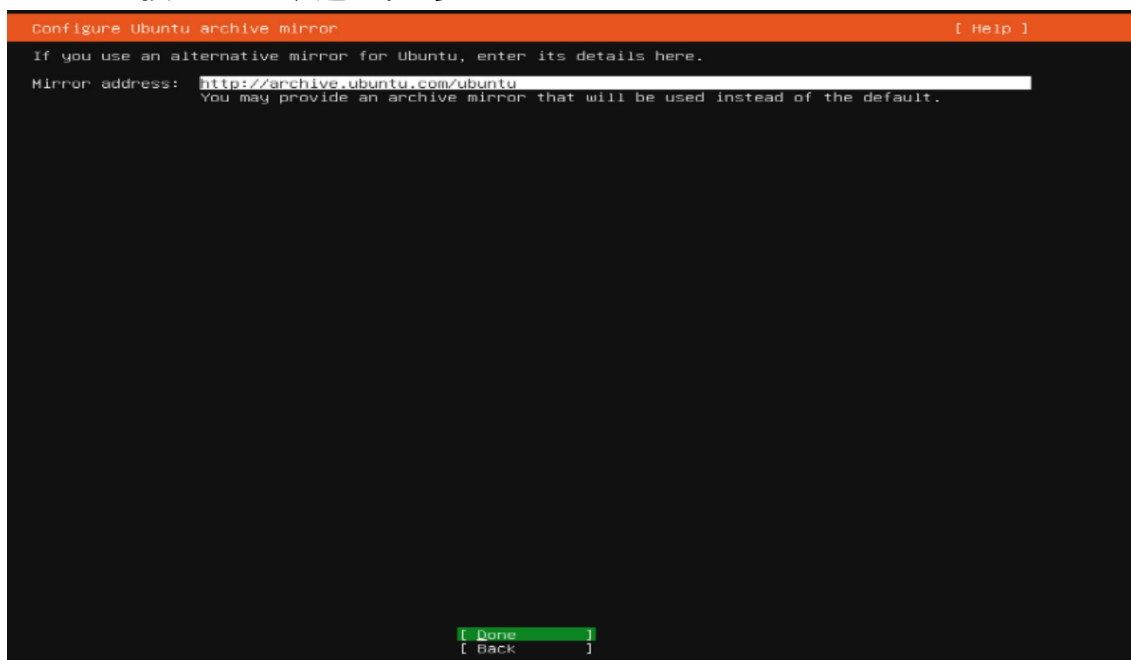

2.10 检查安装包更新，选择 “continue without updating” 选项按<Enter>键进入下一步。

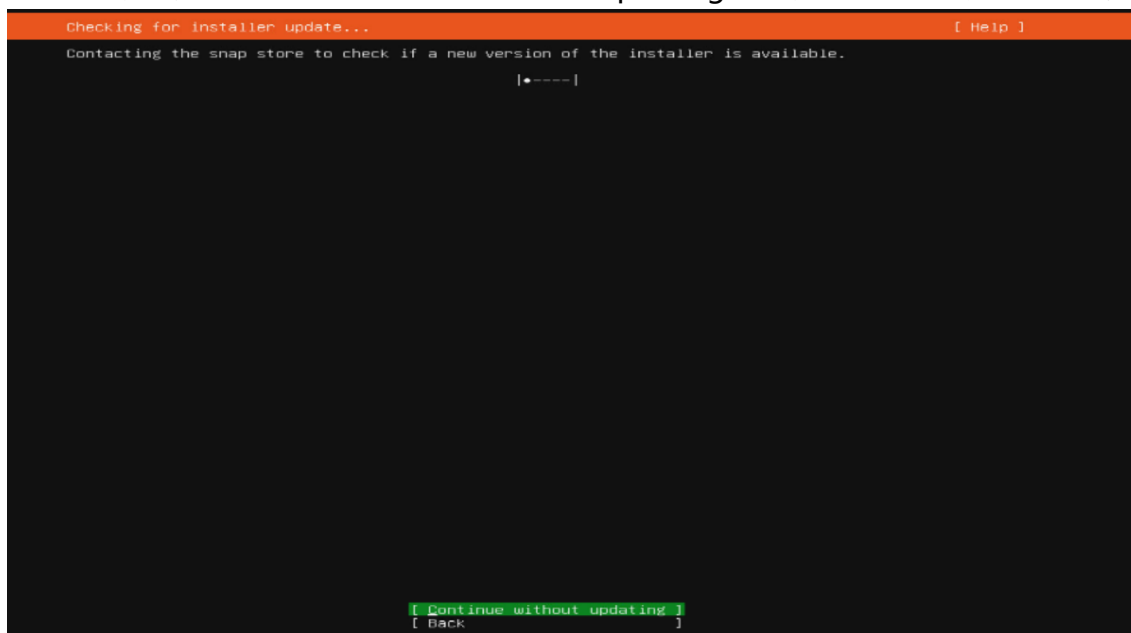

2.11 设置磁盘分区，可以选择自动或者手动分区。

- Use an entire disk 模式：选择一个磁盘后将光标移动到 “Done” 按键系统 将按照默认设置对磁盘进行分区。
- Custom storage layout 模式：将光标移动到 “Done” 按键将进入手动分区设置界面。

```
Guided storage configuration [ Help ]
|---|
Configure a guided storage layout, or create a custom one:
You may provide an archive mirror that will be used instead of the default.
(X) Use an entire disk
    [ 3600508e0000000004329bb0cab0a5f0d local disk 893.137G ▾ ]
[X] Set up this disk as an LVM group
    [ ] Encrypt the LVM group with LUKS
        Passphrase:
        Confirm passphrase:
( ) Custom storage layout
```

2.12 以 Use an entire disk 为例。

```
Storage configuration [ Help ]
|---|
FILE SYSTEM SUMMARY
You may provide an archive mirror that will be used instead of the default.
MOUNT POINT SIZE TYPE DEVICE TYPE
[ / 100.000G new ext4 new LVM logical volume ▶ ]
[ /boot 2.000G new ext4 new partition of local disk ▶ ]
[ /boot/efi 1.049G new fat32 new partition of local disk ▶ ]


AVAILABLE DEVICES

DEVICE TYPE SIZE
[ ubuntu-vg (new) LVM volume group 890.082G ▶ ]
free space 790.082G ▶
[ 35002538e013675c6 local disk 894.253G ▶ ]
free space 894.250G ▶
[ Create software RAID (md) ▶ ]
[ Create volume group (LVM) ▶ ]


USED DEVICES

DEVICE TYPE SIZE
[ ubuntu-vg (new) LVM volume group 890.082G ▶ ]
ubuntu-lv new, to be formatted as ext4, mounted at / 100.000G ▶
[ 3600508e0000000004329bb0cab0a5f0d local disk 893.137G ▶ ]
partition 1 new, primary ESP, to be formatted as fat32, mounted at /boot/efi 1.049G ▶
partition 2 new, to be formatted as ext4, mounted at /boot 2.000G ▶
partition 3 new, PV of LVM volume group ubuntu-vg 890.085G ▶
```

2.13 弹窗提示确认清除磁盘数据，选择 “continue” 按 Enter 键进入下一步。

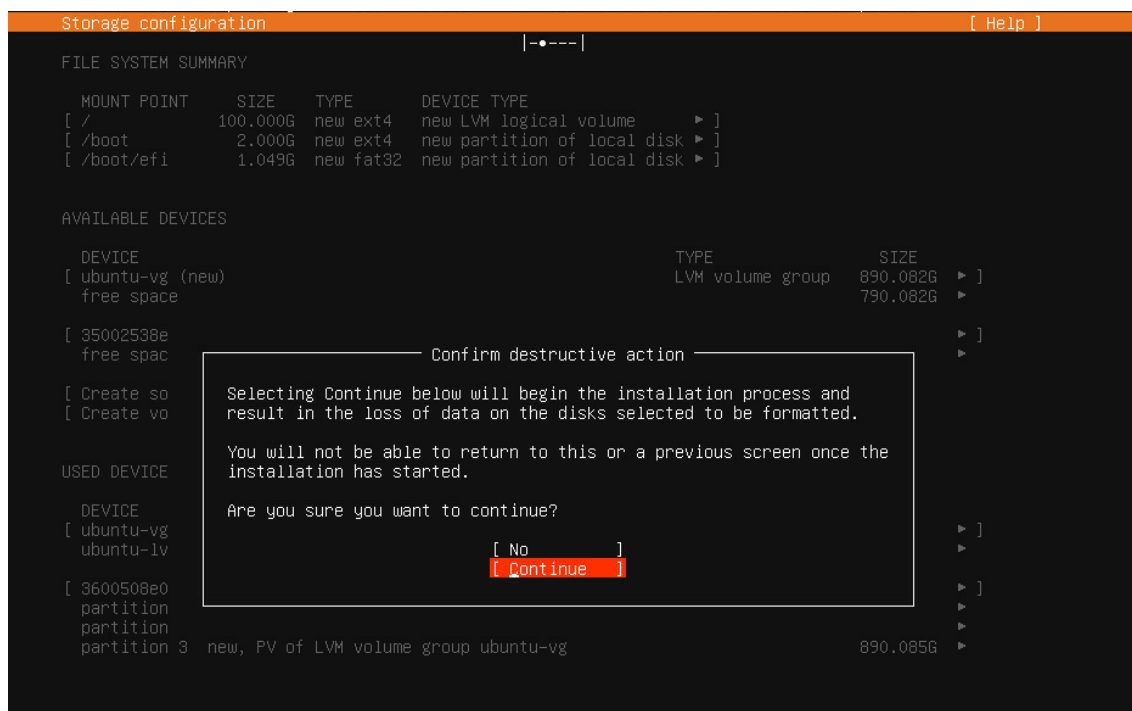


2.14 设置用户名、服务器名及密码，设置完成后将光标移动到 “Done”，按 Enter 键进入下一步。

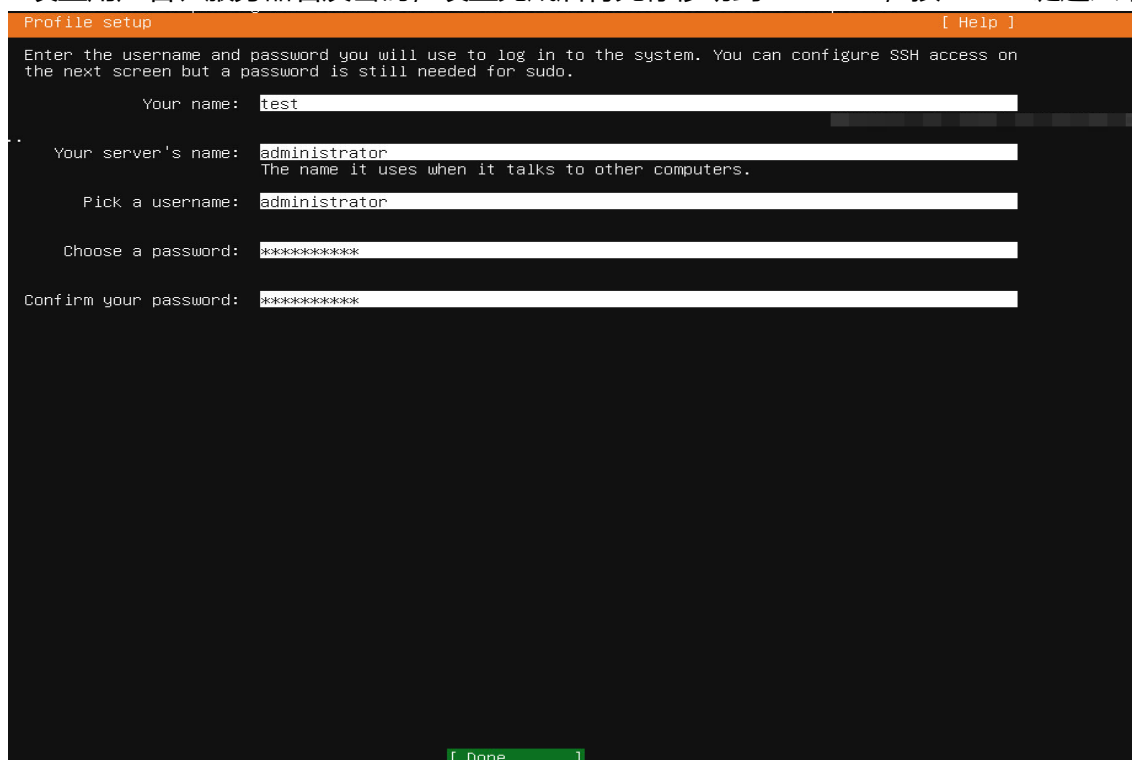


2.15 按<空格键>选择 “Install OpenSSH server”，将光标移到 “Done” 按<Enter>进行安装。

注：需要安装 OpenSSH 服务，否则系统完成安装后无法使用 SSH。

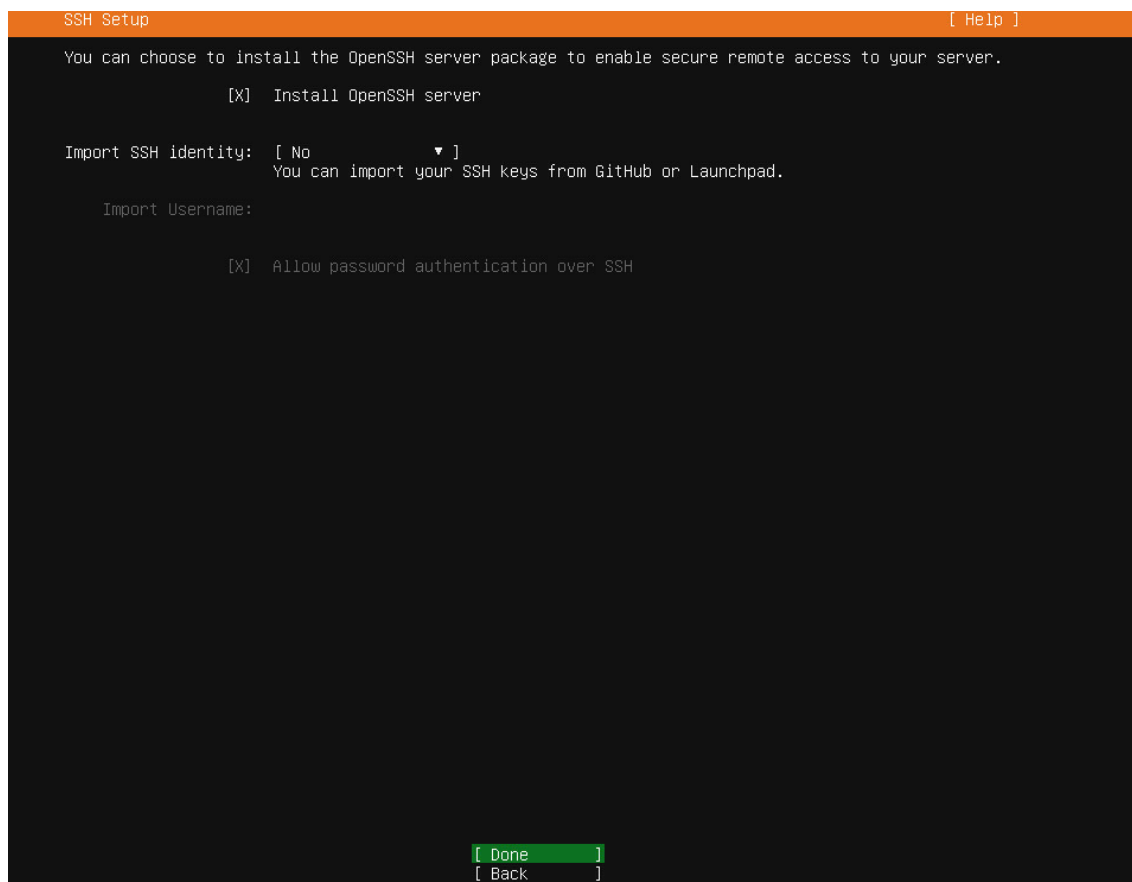

2.16 进行操作系统安装，操作系统安装需要等待一段时间，无需进行其他操作。

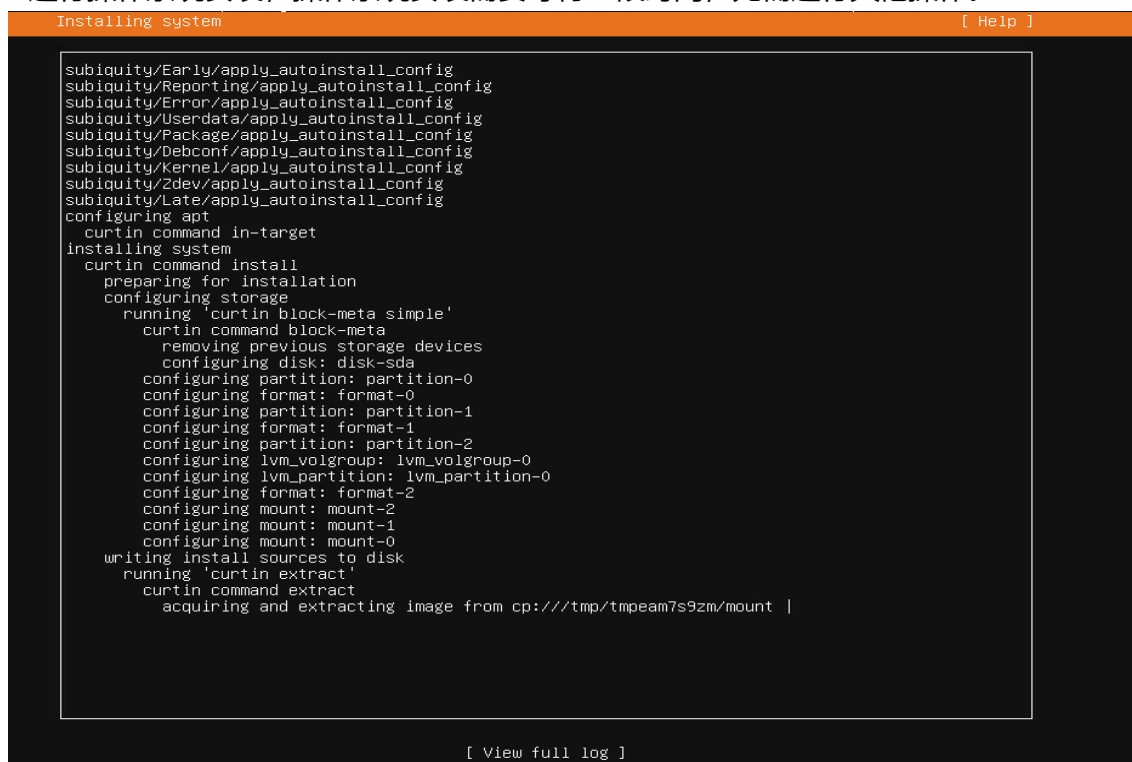

2.17 操作系统安装完成，将光标移动到“Reboot Now”按<Enter>键重启服务器。

```
Install complete! [ Help ]
  curtin command block-meta
  configuring partition: partition-2
  configuring format: format-2
  configuring mount: mount-2
  configuring mount: mount-1
  configuring mount: mount-0
  writing install sources to disk
  running 'curtin extract'
  curtin command extract
  acquiring and extracting image from cp:///tmp/tmpeam7s9zm/mount
  configuring installed system
  running 'mount --bind /cdrom /target/cdrom'
  running 'curtin curthooks'
  curtin command curthooks
  configuring apt configuring apt
  installing missing packages
  Installing packages on target system: ['efibootmgr', 'grub-efi-amd64',
'grub-efi-amd64-signed', 'shim-signed']
  configuring iscsi service
  configuring raid (mdadm) service
  installing kernel
  setting up swap
  apply networking config
  writing etc/fstab
  configuring multipath
  updating packages on target system
  configuring pollinate user-agent on target
  updating initramfs configuration
  configuring target system bootloader
  installing grub to target devices
  finalizing installation
  running 'curtin hook'
  curtin command hook
  executing late commands
  final system configuration
  configuring cloud-init
  calculating extra packages to install
  installing openssh-server
  curtin command system-install
  downloading and installing security updates
  curtin command in-target /

[ View full log ]
[ Cancel update and reboot ]

Install complete! [ Help ]
  curtin command block-meta
  configuring mount: mount-2
  configuring mount: mount-1
  configuring mount: mount-0
  writing install sources to disk
  running 'curtin extract'
  curtin command extract
  acquiring and extracting image from cp:///tmp/tmpeam7s9zm/mount
  configuring installed system
  running 'mount --bind /cdrom /target/cdrom'
  running 'curtin curthooks'
  curtin command curthooks
  configuring apt configuring apt
  installing missing packages
  Installing packages on target system: ['efibootmgr', 'grub-efi-amd64',
'grub-efi-amd64-signed', 'shim-signed']
  configuring iscsi service
  configuring raid (mdadm) service
  installing kernel
  setting up swap
  apply networking config
  writing etc/fstab
  configuring multipath
  updating packages on target system
  configuring pollinate user-agent on target
  updating initramfs configuration
  configuring target system bootloader
  installing grub to target devices
  finalizing installation
  running 'curtin hook'
  curtin command hook
  executing late commands
  final system configuration
  configuring cloud-init
  calculating extra packages to install
  installing openssh-server
  curtin command system-install
  downloading and installing security updates
  curtin command in-target \
  cancelling update

[ View full log ]
[ Rebooting... ]
```

2.18 在系统登录界面输入设置的账户名和密码，即可登录系统。

```
Ubuntu 24.04.2 LTS administrator tty1
administrator login: administrator
Password:
Welcome to Ubuntu 24.04.2 LTS (GNU/Linux 6.8.0-53-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Fri Jul 25 04:02:19 PM UTC 2025

System load:  0.08               Swap usage:  0%      Users logged in: 0
Usage of /:   10.5% of 97.87GB   Temperature: 73.0 C
Memory usage: 1%                Processes:   1114

Expanded Security Maintenance for Applications is not enabled.
0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

administrator@administrator:~$ _
```