


### 组网及说明

涉及到APM,U-Center平台

### 问题描述

按照官网给的配置指导监控resin, 在服务器上使用netstat -ntpl 无法看到9999端口被启用并且无法访问resin

官网配置如下:

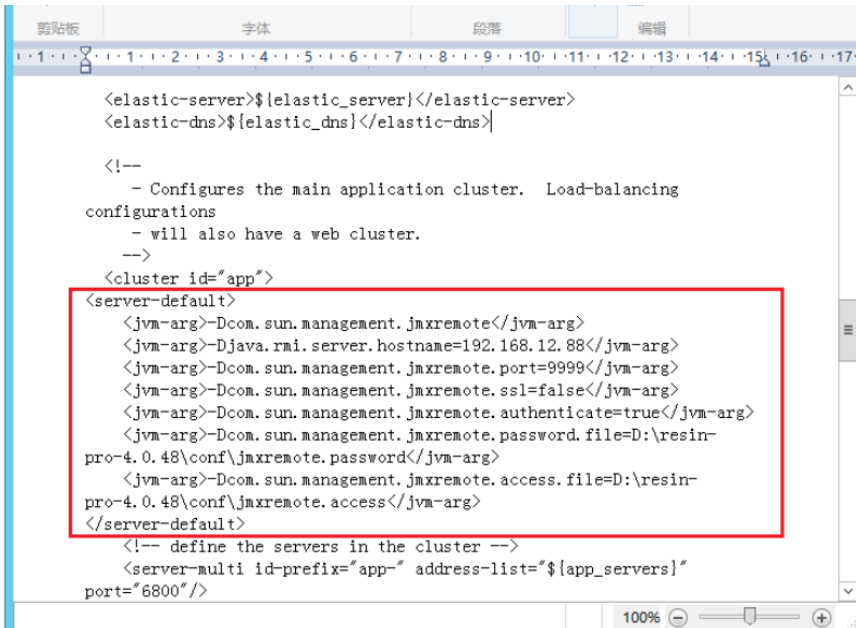

```
<elastic-server>${elastic_server}</elastic-server>
<elastic-dns>${elastic_dns}</elastic-dns>

<!--
  - Configures the main application cluster.  Load-balancing
  configurations
  - will also have a web cluster.
-->
<cluster id="app">
<server-default>
  <jvm-arg>-Dcom.sun.management.jmxremote</jvm-arg>
  <jvm-arg>-Djava.rmi.server.hostname=192.168.12.88</jvm-arg>
  <jvm-arg>-Dcom.sun.management.jmxremote.port=9999</jvm-arg>
  <jvm-arg>-Dcom.sun.management.jmxremote.ssl=false</jvm-arg>
  <jvm-arg>-Dcom.sun.management.jmxremote.authenticate=true</jvm-arg>
  <jvm-arg>-Dcom.sun.management.jmxremote.password.file=D:\resin-
pro-4.0.48\conf\jmxremote.password</jvm-arg>
  <jvm-arg>-Dcom.sun.management.jmxremote.access.file=D:\resin-
pro-4.0.48\conf\jmxremote.access</jvm-arg>
</server-default>
  <!-- define the servers in the cluster -->
  <server-multi id-prefix="app-" address-list="${app_servers}"
port="6800"/>
```

### 过程分析

删除我们添加的配置之后能正常访问resin

### 解决方法

打开 Resin 应用的 resin.xml 配置文件

在下添加如下命令

- Dcom.sun.management.jmxremote
- Djava.rmi.server.hostname=172.28.5.171
- Dcom.sun.management.jmxremote.port=9999
- Dcom.sun.management.jmxremote.ssl=false
- Dcom.sun.management.jmxremote.authenticate=false

重启resin之后能正常监控