

组网及说明

为了能够实时的收取交换机的syslog信息，需要在交换机部署info-center，同时在IMC纳管相应的设备，即可实现实时收取交换机的syslog信息。

IMC版本为PLAT 7.3 E0506P03

S6800的版本如下：

H3C Comware Software, Version 7.1.045, Release 2418P05
Copyright (c) 2004-2015 Hangzhou H3C Tech. Co., Ltd. All rights reserved.
H3C S6800-4C uptime is 239 weeks, 1 day, 6 hours, 2 minutes
Last reboot reason : USER reboot

Boot image: flash:/s6800-cmw710-boot-r2418p05.bin
Boot image version: 7.1.045, Release 2418P05
Compiled Jun 09 2015 12:06:42
System image: flash:/s6800-cmw710-system-r2418p05.bin
System image version: 7.1.045, Release 2418P05
Compiled Jun 09 2015 12:06:42

Slot 1:

Uptime is 31 weeks,0 days,9 hours,4 minutes
S6800-4C with 2 Processors
BOARD TYPE: S6800-4C
DRAM: 4096M bytes
FLASH: 1024M bytes
PCB 1 Version: VER.A
PCB 2 Version: VER.A
Bootrom Version: 214
CPLD 1 Version: 002
CPLD 2 Version: 003
Release Version: H3C S6800-4C-2418P05
Patch Version : None
Reboot Cause : UserReboot
[SubSlot 0] Main Board
[SubSlot 1] 24*SFP Plus(MacSec) + 2*QSFP Plus
[SubSlot 2] 24*SFP Plus(MacSec) + 2*QSFP Plus

Slot 2:

Uptime is 31 weeks,0 days,8 hours,49 minutes
S6800-4C with 2 Processors
BOARD TYPE: S6800-4C
DRAM: 4096M bytes
FLASH: 1024M bytes
PCB 1 Version: VER.A
PCB 2 Version: VER.A
Bootrom Version: 214
CPLD 1 Version: 002
CPLD 2 Version: 003
Release Version: H3C S6800-4C-2418P05
Patch Version : None
Reboot Cause : UserReboot
[SubSlot 0] Main Board
[SubSlot 1] 24*SFP Plus(MacSec) + 2*QSFP Plus
[SubSlot 2] 24*SFP Plus(MacSec) + 2*QSFP Plus

配置步骤


S6800 syslog部署：

info-center enable
info-center loghost 10.190.8.7


IMC纳管S6800交换机:



在IMC的“告警”-“syslog管理”-“浏览syslog”通过搜索设备的IP，即可看到该交换机发送上来的syslog:

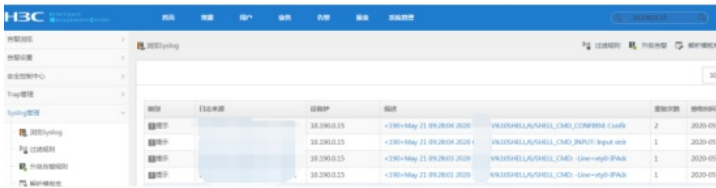

通过点击“描述”下的信息，可以查看到具体的syslog信息:

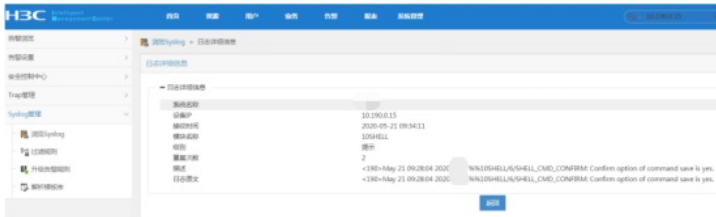

至此，S6800交换机syslog典型组网配置案例已完成!

配置关键点