

## 知 S3110本地端口镜像配置 (WEB版)

产品特性 镜像 韦家宁 2020-05-23 发表

### 组网及说明

本案例为S3110本地端口镜像配置，其中G1/0/25为源端口，G1/0/26为目的端口。

S3110版本信息如下：

H3C Comware Platform Software

Comware Software, Version 5.20.99, Release 1106

Copyright (c) 2004-2015 Hangzhou H3C Tech. Co., Ltd. All rights reserved.

H3C S3110-26TP uptime is 0 week, 0 day, 8 hours, 27 minutes

H3C S3110-26TP

128M bytes DRAM

32M bytes Flash Memory

Config Register points to Flash


Hardware Version is REV.A

Bootrom Version is 110


[SubSlot 0] 24FE+2GE Combo Hardware Version is REV.A

### 配置步骤


登录网页版：

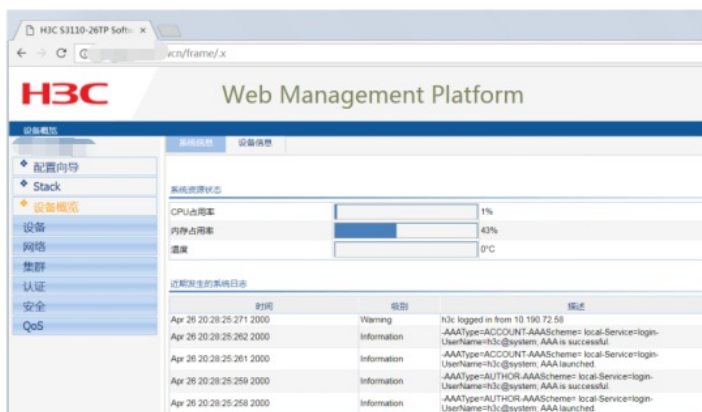


点击“设备”：

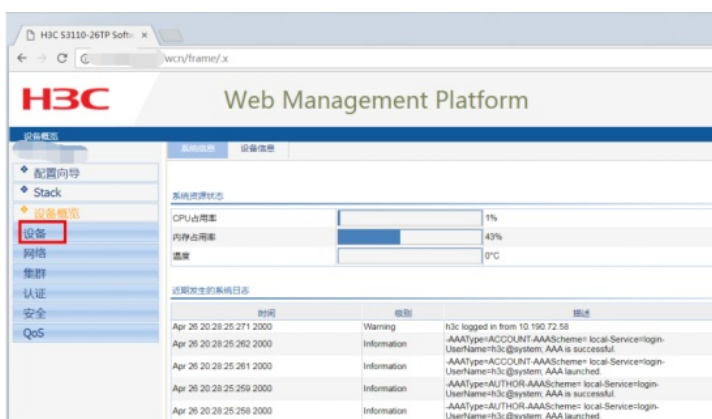


点击“端口镜像”：

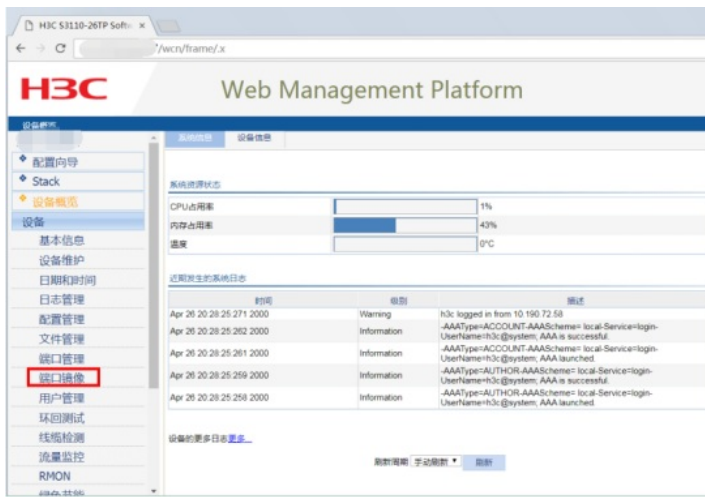


点击“新建”:

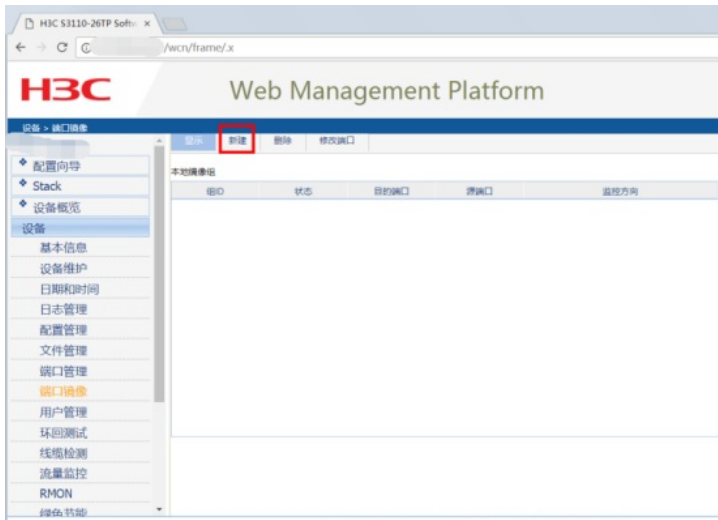



输入镜像组的ID, 点击“应用”:

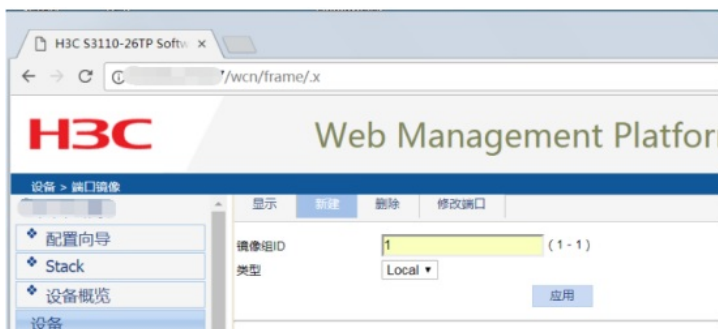


点击“修改端口”:

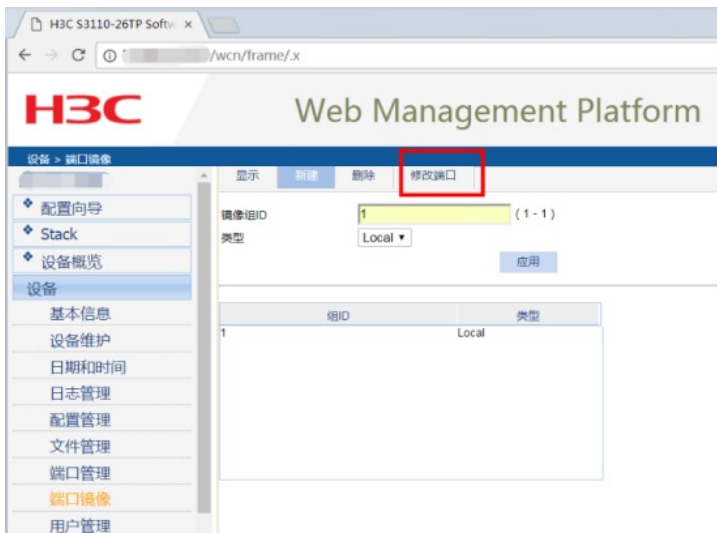


指定源端口：选择“镜像组ID”、选择端口类型为“Mirror port”，监控方向为“both”，在交换机面板选择“25”后点击应用，说明27口为镜像口。

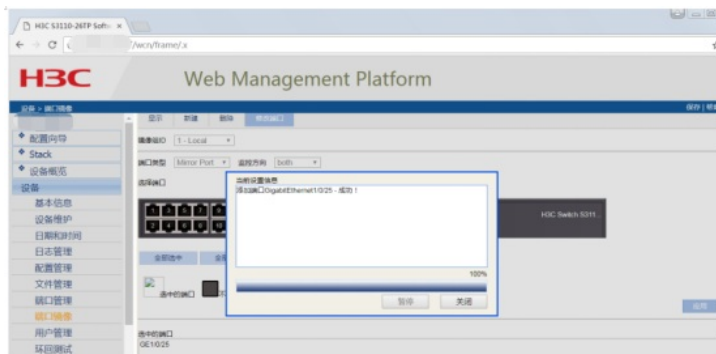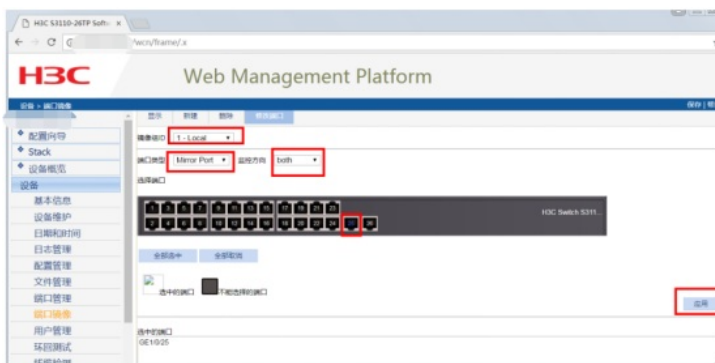


指定目的端口：选择“镜像组ID”、选择端口类型为“Monitor port”，在交换机面板选择“28”后点击应用，说明26口为目的端口。

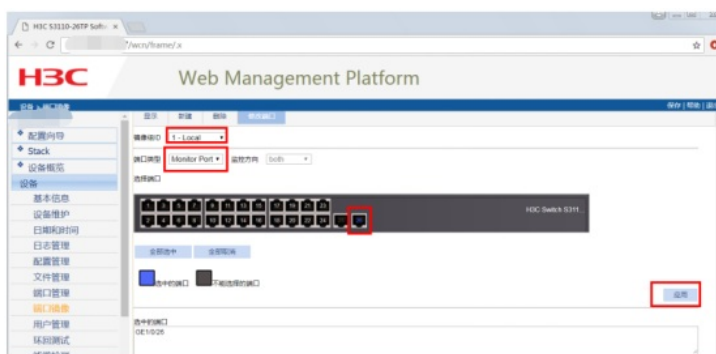

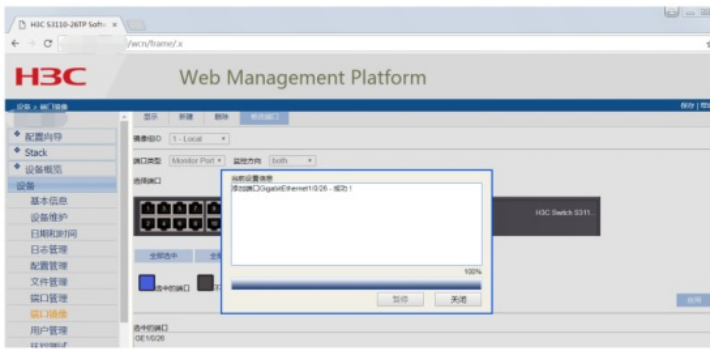

配置完成:

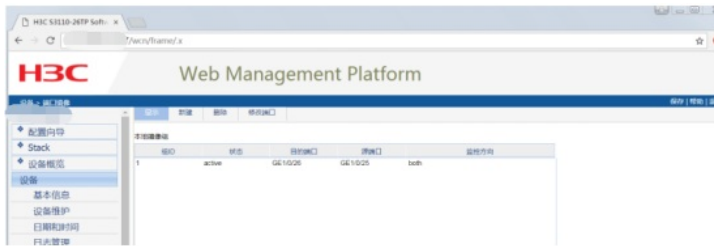

至此，S3110本地端口镜像配置（WEB版）已完成！

配置关键点