

知 S3600本地端口镜像配置 (WEB版)

镜像 产品特性 韦家宁 2020-05-23 发表

组网及说明

本案例为S3600本地端口镜像配置，其中G1/0/27为源端口，G1/0/28为目的端口。

S3600版本信息如下：

H3C Comware Platform Software

Comware Software, Version 5.20, Release 2112

Copyright (c) 2004-2017 New H3C Technologies Co., Ltd. All rights reserved.

H3C S3600V2-28TP-EI uptime is 1 week, 2 days, 4 hours, 2 minutes

H3C S3600V2-28TP-EI with 1 Processor

256M bytes SDRAM

2M bytes Nor Flash Memory

128M bytes Nand Flash Memory

Config Register points to Nand Flash

Hardware Version is Ver.A


CPLD Version is 001

BootRom Version is 133


[SubSlot 0] 24FE+4SFP+2Combo GE Hardware Version is Ver.A

配置步骤


登录网页版：

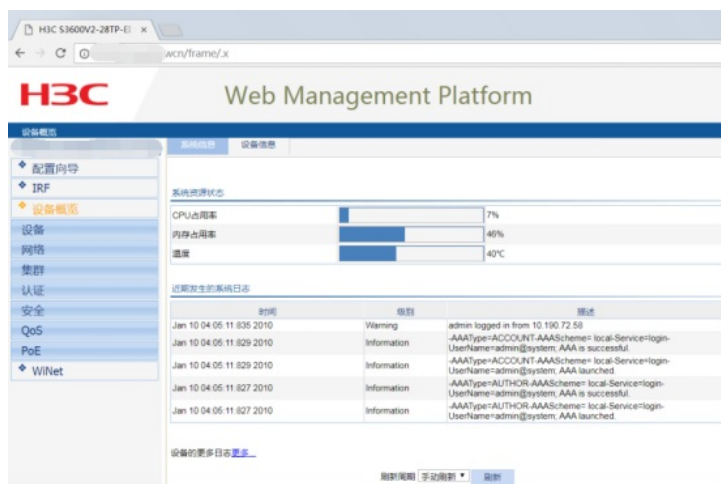


点击“设备”：

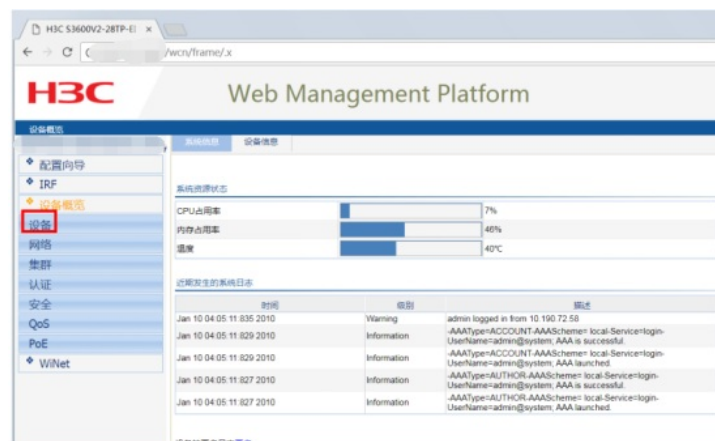

点击“端口镜像”：

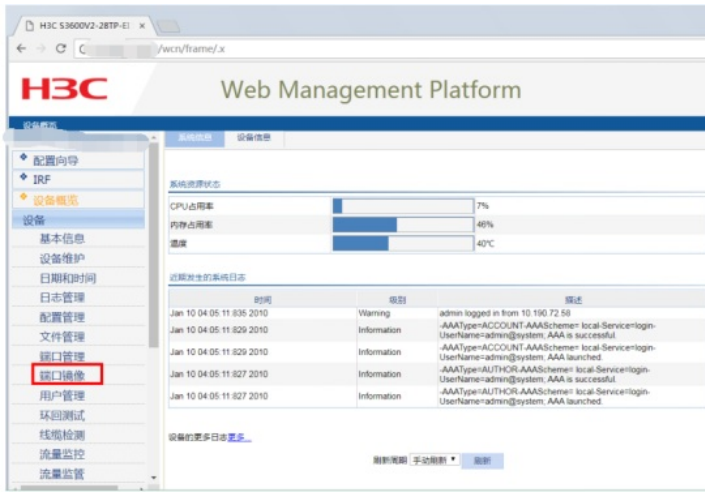


点击“新建”：

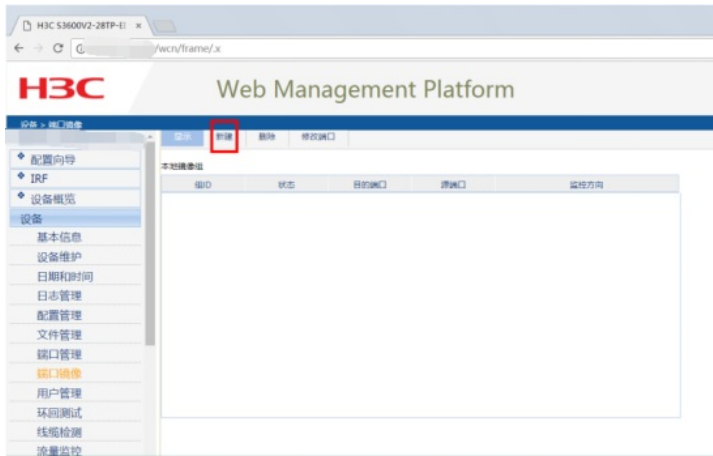


输入镜像组的ID，点击“应用”：






点击“修改端口”：

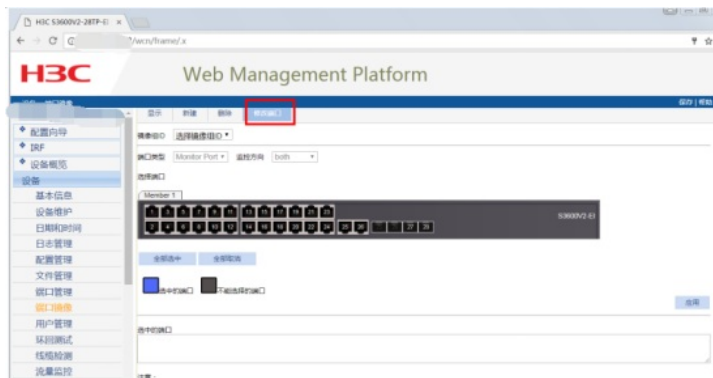


指定源端口：选择“镜像组ID”、选择端口类型为“Mirror port”，监控方向为“both”，在交换机面板选择“27”后点击应用，说明27口为镜像口。

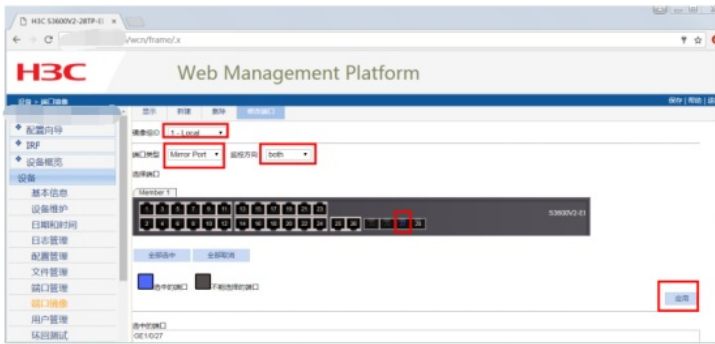

指定目的端口：选择“镜像组ID”、选择端口类型为“Monitor port”，在交换机面板选择“28”后点击应用，说明28口为目的端口。

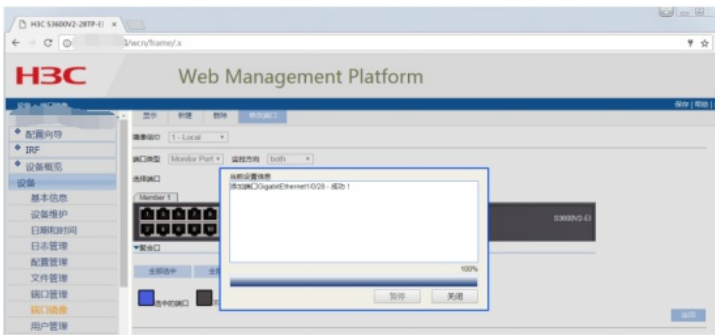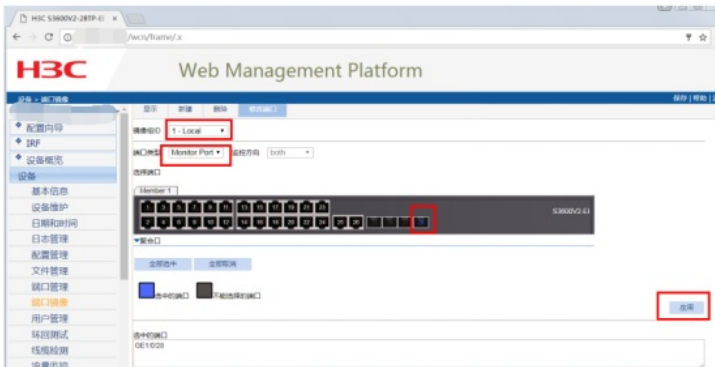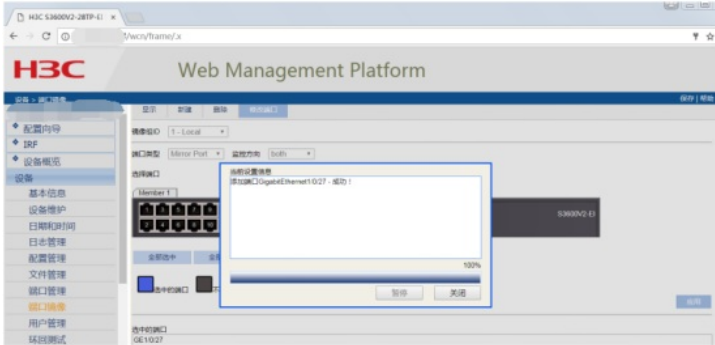

配置完成：

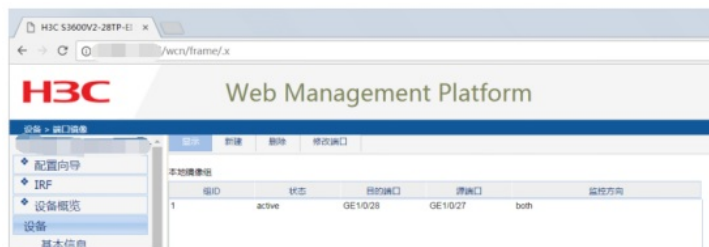

至此，S3600本地端口镜像配置（WEB版）已完成！

配置关键点