



需要备份SIM的配置文件和导入配置文件。

一、测试只卸载SIM的情况：

备份数据库文件前确认下目前已经查找到的服务器。目前有DL380p Gen8（CMS Central Management Server）和DL380 G5（被管理服务）。

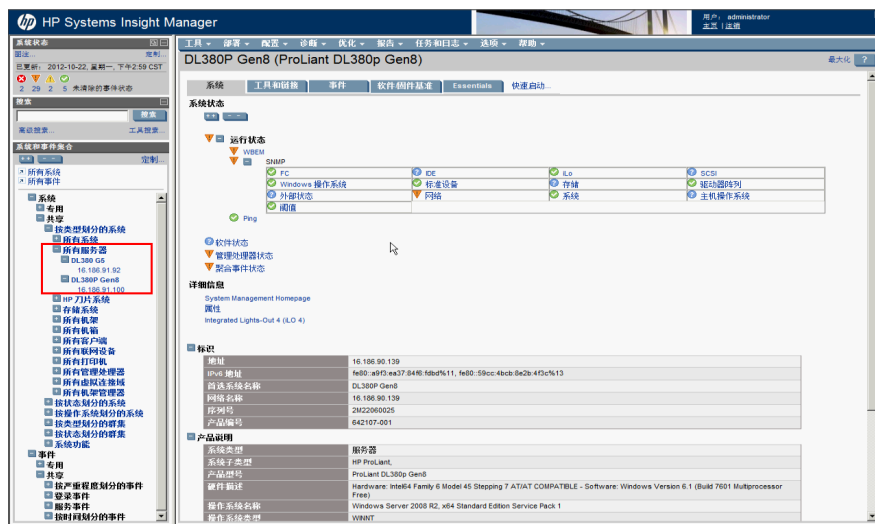

然后在CMD命令行下进入SIM安装目录下的BIN子目录，cd C:\Program Files\HP\System Insight Manager\bin，运行mxexport -f 备份数据库，-f后面输入要备份的目的地以及文件名。比如这里是data.zip（文件格式需要时zip格式）。

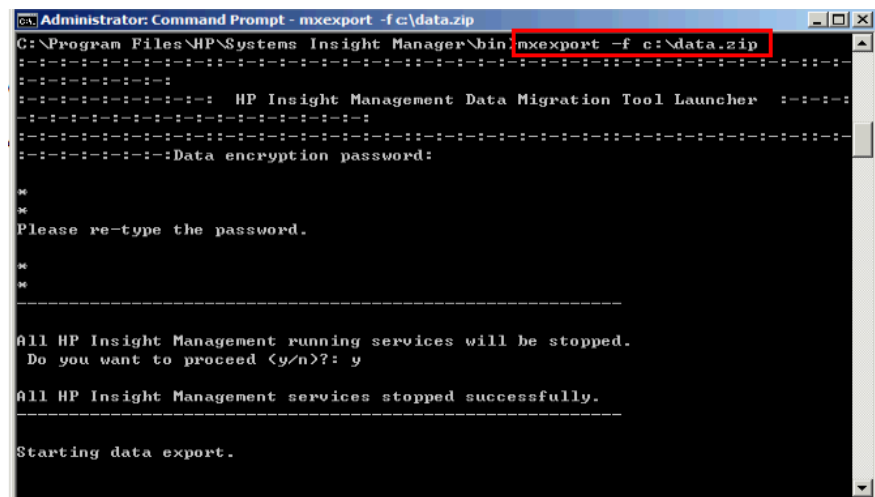

需要输入加密密码，输入12345678即可，然后再重新输入确认一下。询问是否停止Insight Management服务，输入y。

```
Administrator: Command Prompt

Please re-type the password.

-----

All HP Insight Management running services will be stopped.
Do you want to proceed (y/n)? : y

All HP Insight Management services stopped successfully.


Starting data export.

Product Name      : HP Systems Insight Manager
Product Version   : 7.0.0
Status            : Successful


-----

Export operation completed in : 0 Min. 24 Sec
Successfully EXPORTED data to file : c:\data.zip
Product Status xml is available in : C:\Program Files\HP\System Insight Manager\logs\DMTStatus.xml
C:\Program Files\HP\System Insight Manager\bin>
```

备份之后，在备份目的地可以看到已经备份好的zip文件。确认数据库文件备份好后，把SIM卸载并删除SIM安装目录。

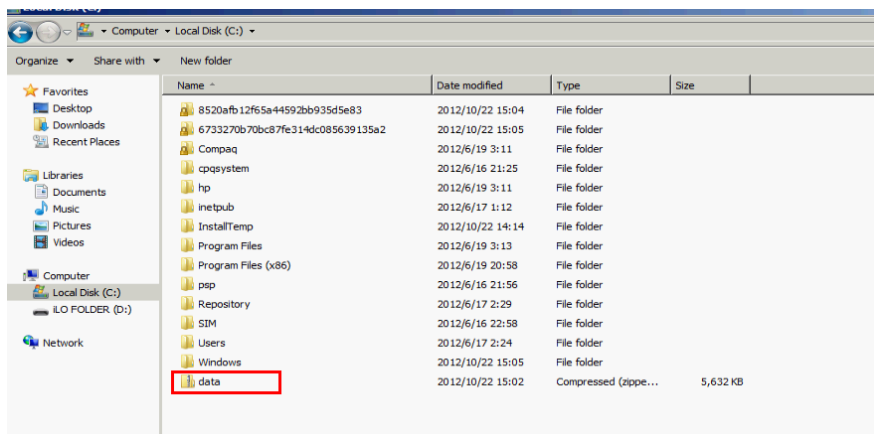


卸载SIM，并重新安装SIM，可以发现已经看不到之前发现的DL380 G5服务器了，但本机的DL380p G en8服务器还是可以看到，只是名称需要重新编辑一下。

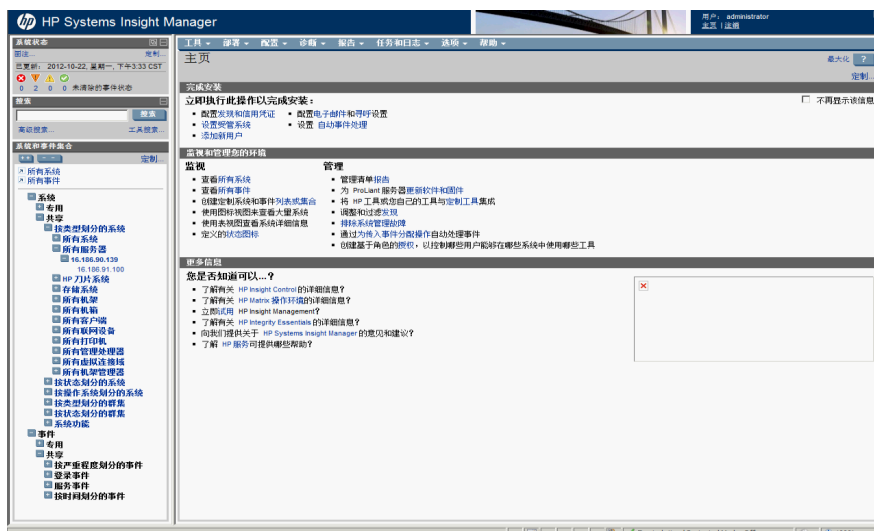


还是在命令行下，这次使用import命令来恢复数据库。同样还是需要输入之前的加密密码，输入之后回车继续。选择Y同意停止服务。



关闭SIM，采用相同方法导入数据库文件，然后再次打开SIM（此次打开SIM可能时间较长，如果长时间无响应，可重新启动下SIM服务或者服务器）。可以看到之前备份的信息了，CMS和被管理服务器都能看到具体的SNMP信息。如果之前的ILO地址有改动，可能会记录之前的一些信息，可以尝试删除。

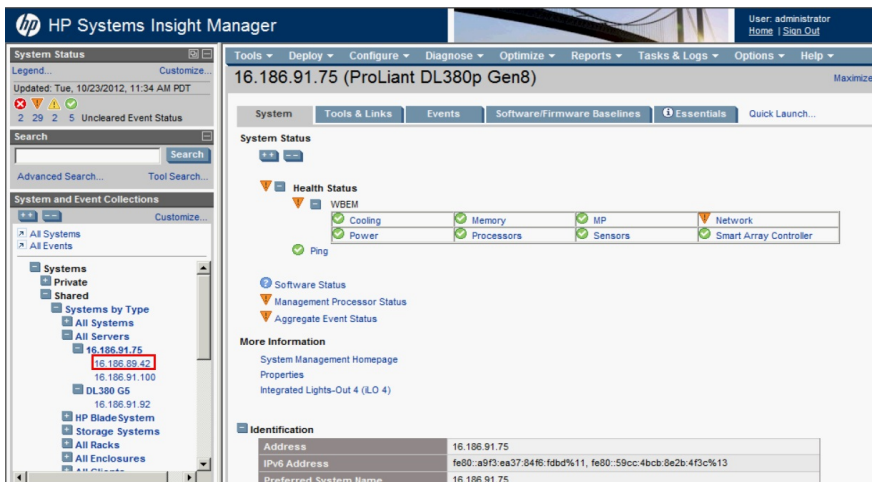

在搜索栏搜索需要删除的地址，找到设备后，选中此设备，点击删除即可

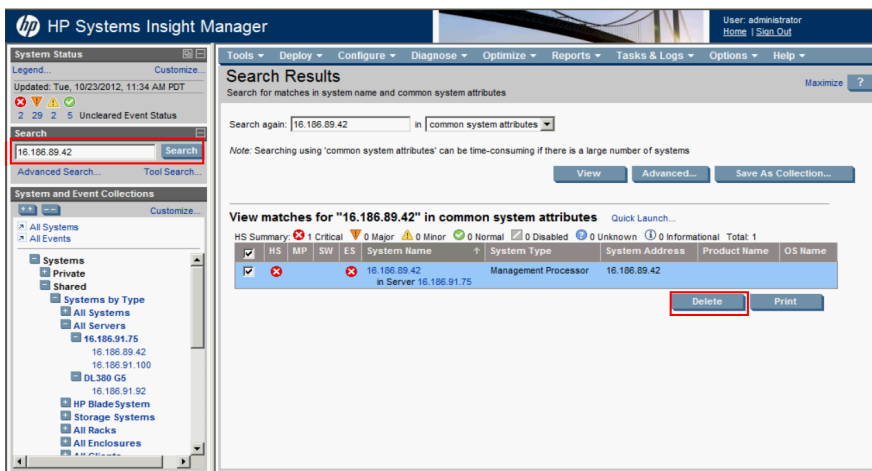

删除后可以正常使用。

HP Systems Insight Manager

User: administrator
[Home](#) / [Sign Out](#)

System Status

Legend...
Updated: Tue, 10/23/2012, 11:36 AM PDT
1 29 2 4 Uncleared Event Status

Search
16.186.89.42
Advanced Search... Tool Search...

System and Event Collections
All Systems
All Events
Systems
Private
Shared
Systems by Type
All Systems
All Servers
16.186.91.75
16.186.91.100
DL380 G5
16.186.91.92
HP BladeSystem
Storage Systems
All Racks
All Enclosures
All Clients

Tools Deploy Configure Diagnose Optimize Reports Tasks & Logs Options Help

16.186.91.75 (ProLiant DL380p Gen8) Maximize ?

System Tools & Links Events Software/Firmware Baselines Essentials Quick Launch...

System Status

Health Status
WBEM
Cooling Memory MP Network
Power Processors Sensors Smart Array Controller
Ping

Software Status
Management Processor Status
Aggregate Event Status

More Information
System Management Homepage
Properties
Integrated Lights-Out 4 (LO 4)

Identification
Address 16.186.91.75
IPv6 Address fe80::a9f3:ea37:84f6:fd8d%11, fe80::59cc:4bcb:8e2b:4f3c%13
Preferred System Name 16.186.91.75