

## 组网及说明

### 1 配置需求或说明


#### 1.1 适用产品系列

本案例适用于如S5024PV3-EI-HPWR、S5048PV3-EI、S5120V2-52P-LI、S5120V2-28P-SI、S5130-52S-EI、S5130S-28S-EI、S5150X-16ST-EI等S5000PV3、S5120V2、S5130、S5150系列的交换机。

#### 1.2 配置需求及实现的效果

在一个二层网络中，SWA通过端口GigabitEthernet1/0/1连接PC，SWC通过端口GigabitEthernet1/0/2连接server。通过配置二层远程端口镜像，使Server可以监控所有进、出PC的报文。

### 2 组网图

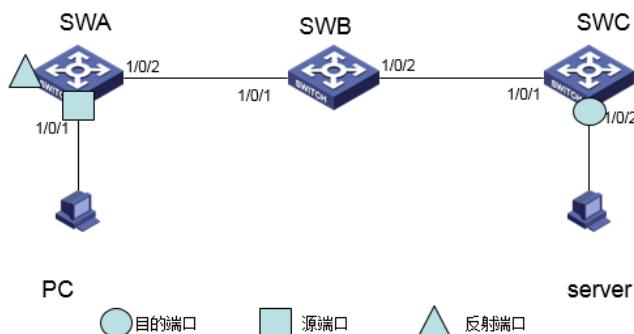

## 配置步骤

### 3 配置步骤

#### 配置SWC

# 配置端口GigabitEthernet1/0/1为Trunk口，并允许VLAN 2的报文通过。

system-view

[SWC] interface gigabitethernet 1/0/1

[SWC-GigabitEthernet1/0/1] port link-type trunk

[SWC-GigabitEthernet1/0/1] port trunk permit vlan 2

[SWC-GigabitEthernet1/0/1] quit

# 创建远程目的镜像组2。

[SWC] mirroring-group 2 remote-destination

# 创建VLAN 2作为远程镜像VLAN。

[SWC] vlan 2

# 关闭VLAN 2的MAC地址学习功能。

[SWC-vlan2] undo mac-address mac-learning enable

[SWC-vlan2] quit

# 配置远程目的镜像组2的远程镜像VLAN为VLAN 2，目的端口为GigabitEthernet1/0/2，在该端口上关闭生成树协议并将其加入VLAN 2。

[SWC] mirroring-group 2 remote-probe vlan 2

[SWC] interface gigabitethernet 1/0/2

[SWC-GigabitEthernet1/0/2] mirroring-group 2 monitor-port

[SWC-GigabitEthernet1/0/2] undo stp enable

[SWC-GigabitEthernet1/0/2] port access vlan 2

[SWC-GigabitEthernet1/0/2] quit

#### (2) 配置SWB

# 创建VLAN 2作为远程镜像VLAN。

system-view

[SWB] vlan 2

# 关闭VLAN 2的MAC地址学习功能。

[SWB-vlan2] undo mac-address mac-learning enable

[SWB-vlan2] quit

# 配置端口GigabitEthernet1/0/1为Trunk口，并允许VLAN 2的报文通过。

[SWB] interface gigabitethernet 1/0/1

[SWB-GigabitEthernet1/0/1] port link-type trunk

```
[SWB-GigabitEthernet1/0/1] port trunk permit vlan 2
[SWB-GigabitEthernet1/0/1] quit
# 配置端口GigabitEthernet1/0/2为Trunk口，并允许VLAN 2的报文通过。
[SWB] interface gigabitethernet 1/0/2
[SWB-GigabitEthernet1/0/2] port link-type trunk
[SWB-GigabitEthernet1/0/2] port trunk permit vlan 2
[SWB-GigabitEthernet1/0/2] quit
(3) 配置SWA
# 创建远程源镜像组1。
system-view
[SWA] mirroring-group 1 remote-source
# 创建VLAN 2作为远程镜像VLAN。
[SWA] vlan 2
# 关闭VLAN 2的MAC地址学习功能。
[SWA-vlan2] undo mac-address mac-learning enable
[SWA-vlan2] quit
# 配置远程源镜像组1的远程镜像VLAN为VLAN 2，源端口为GigabitEthernet1/0/1，反射端口为Gigabit
Ethernet1/0/3。
[SWA] mirroring-group 1 remote-probe vlan 2
[SWA] mirroring-group 1 mirroring-port gigabitethernet 1/0/1 both
[SWA] mirroring-group 1 reflector-port gigabitethernet 1/0/3
This operation may delete all settings made on the interface. Continue? [Y/N]: y
# 配置端口GigabitEthernet1/0/2为Trunk口，并允许VLAN 2的报文通过。
[SWA] interface gigabitethernet 1/0/2
[SWA-GigabitEthernet1/0/2] port link-type trunk
[SWA-GigabitEthernet1/0/2] port trunk permit vlan 2
[SWA-GigabitEthernet1/0/2] quit
```

#### 4 验证配置

# 显示SWC上所有镜像组的配置信息。

```
[SWC] display mirroring-group all
```

Mirroring group 2:

```
Type: Remote destination
Status: Active
Monitor port: GigabitEthernet1/0/2
Remote probe VLAN: 2
```

# 显示SWA上所有镜像组的配置信息。

```
[SWA] display mirroring-group all
```

Mirroring group 1:

```
Type: Remote source
Status: Active
Mirroring port:
    GigabitEthernet1/0/1 Both
Reflector port: GigabitEthernet1/0/3
Remote probe VLAN: 2
```

配置关键点