

# F1060 EBGP MD5认证典型组网配置案例

设备部署方式 H3C模拟器 韦家宁 2020-03-30 发表

## 组网及说明



### 组网说明：

本案例采用H3C HCL模拟器的F1060防火墙来模拟EBGP MD5认证的典型组网。为了实现PC之间相互PING通，本案例采用EBGP的方式实现，同时为了保证EBGP邻居的合法性，因此采用EBGP MD5加密认证。

## 配置步骤

- 1、按照网络拓扑图正确配置IP地址
- 2、FW1、FW2建立EBGP邻居关系
- 3、FW1与FW2之间采用EBGP MD5认证。

## 配置关键点

FW1：

```
<H3C>sys
System View: return to User View with Ctrl+Z.
[H3C]sysname FW1
[FW1]acl basic 2002
[FW1-acl-ipv4-basic-2002]rule 0 permit source any
[FW1-acl-ipv4-basic-2002]quit
[FW1]
[FW1]zone-pair security source trust destination untrust
[FW1-zone-pair-security-Trust-Untrust]packet-filter 2002
[FW1-zone-pair-security-Trust-Untrust]quit
[FW1]
[FW1]zone-pair security source untrust destination trust
[FW1-zone-pair-security-Untrust-Trust]packet-filter 2002
[FW1-zone-pair-security-Untrust-Trust]quit
[FW1]
[FW1]zone-pair security source trust destination local
[FW1-zone-pair-security-Trust-Local]packet-filter 2002
[FW1-zone-pair-security-Trust-Local]quit
[FW1]
[FW1]zone-pair security source local destination trust
[FW1-zone-pair-security-Local-Trust]packet-filter 2002
[FW1-zone-pair-security-Local-Trust]quit
[FW1]
[FW1]zone-pair security source untrust destination local
[FW1-zone-pair-security-Untrust-Local]packet-filter 2002
[FW1-zone-pair-security-Untrust-Local]quit
[FW1]
[FW1]zone-pair security source local destination untrust
[FW1-zone-pair-security-Local-Untrust]packet-filter 2002
[FW1-zone-pair-security-Local-Untrust]quit
[FW1]
[FW1]zone-pair security source trust destination trust
[FW1-zone-pair-security-Trust-Trust]packet-filter 2002
```

```
[FW1-zone-pair-security-Trust-Trust]quit
[FW1]
[FW1]zone-pair security source untrust destination untrust
[FW1-zone-pair-security-Untrust-Untrust]packet-filter 2002
[FW1-zone-pair-security-Untrust-Untrust]quit
[FW1]int loopback 0
[FW1-LoopBack0]ip address 1.1.1.1 32
[FW1-LoopBack0]quit
[FW1]int gi 1/0/2
[FW1-GigabitEthernet1/0/2]ip address 192.168.1.1 24
[FW1-GigabitEthernet1/0/2]quit
[FW1]int gi 1/0/3
[FW1-GigabitEthernet1/0/3]des <connect to FW2>
[FW1-GigabitEthernet1/0/3]ip address 10.0.0.1 30
[FW1-GigabitEthernet1/0/3]quit
[FW1]security-zone name Trust
[FW1-security-zone-Trust]import interface GigabitEthernet 1/0/2
[FW1-security-zone-Trust]quit
[FW1]security-zone name Untrust
[FW1-security-zone-Untrust]import interface GigabitEthernet 1/0/3
[FW1-security-zone-Untrust]import interface LoopBack 0
[FW1-security-zone-Untrust]quit
[FW1]bgp 100
[FW1-bgp-default]router-id 1.1.1.1
[FW1-bgp-default]peer 10.0.0.2 as-number 200
[FW1-bgp-default]peer 10.0.0.2 password simple admin
[FW1-bgp-default]address-family ipv4 unicast
[FW1-bgp-default-ipv4]peer 10.0.0.2 enable
[FW1-bgp-default-ipv4]network 192.168.1.0 255.255.255.0
[FW1-bgp-default-ipv4]quit
[FW1-bgp-default]quit
```

```
FW2:
<H3C>sys
System View: return to User View with Ctrl+Z.
[H3C]sysname FW2
[FW2]acl basic 2002
[FW2-acl-ipv4-basic-2002]rule 0 permit source any
[FW2-acl-ipv4-basic-2002]quit
[FW2]
[FW2]zone-pair security source trust destination untrust
[FW2-zone-pair-security-Trust-Untrust]packet-filter 2002
[FW2-zone-pair-security-Trust-Untrust]quit
[FW2]
[FW2]zone-pair security source untrust destination trust
[FW2-zone-pair-security-Untrust-Trust]packet-filter 2002
[FW2-zone-pair-security-Untrust-Trust]quit
[FW2]
[FW2]zone-pair security source trust destination local
[FW2-zone-pair-security-Trust-Local]packet-filter 2002
[FW2-zone-pair-security-Trust-Local]quit
[FW2]
[FW2]zone-pair security source local destination trust
[FW2-zone-pair-security-Local-Trust]packet-filter 2002
[FW2-zone-pair-security-Local-Trust]quit
[FW2]
[FW2]zone-pair security source untrust destination local
[FW2-zone-pair-security-Untrust-Local]packet-filter 2002
[FW2-zone-pair-security-Untrust-Local]quit
[FW2]
[FW2]zone-pair security source local destination untrust
[FW2-zone-pair-security-Local-Untrust]packet-filter 2002
[FW2-zone-pair-security-Local-Untrust]quit
[FW2]
```

```

[FW2]zone-pair security source trust destination trust
[FW2-zone-pair-security-Trust-Trust]packet-filter 2002
[FW2-zone-pair-security-Trust-Trust]quit
[FW2]
[FW2]zone-pair security source untrust destination untrust
[FW2-zone-pair-security-Untrust-Untrust]packet-filter 2002
[FW2-zone-pair-security-Untrust-Untrust]quit
[FW2]int loopback 0
[FW2-LoopBack0]ip address 2.2.2.2 32
[FW2-LoopBack0]quit
[FW2]int gi 1/0/2
[FW2-GigabitEthernet1/0/2]ip address 172.16.1.1 24
[FW2-GigabitEthernet1/0/2]quit
[FW2]int gi 1/0/3
[FW2-GigabitEthernet1/0/3]des <connect to FW1>
[FW2-GigabitEthernet1/0/3]ip address 10.0.0.2 30
[FW2-GigabitEthernet1/0/3]quit
[FW2]security-zone name Trust
[FW2-security-zone-Trust]import interface GigabitEthernet 1/0/2
[FW2-security-zone-Trust]quit
[FW2]security-zone name Untrust
[FW2-security-zone-Untrust]import interface LoopBack 0
[FW2-security-zone-Untrust]import interface GigabitEthernet 1/0/3
[FW2-security-zone-Untrust]quit
[FW2]bgp 200
[FW2-bgp-default]router-id 2.2.2.2
[FW2-bgp-default]peer 10.0.0.1 as-number 100
[FW2-bgp-default]peer 10.0.0.1 password simple admin
[FW2-bgp-default]address-family ipv4 unicast
[FW2-bgp-default-ipv4]peer 10.0.0.1 enable
[FW2-bgp-default-ipv4]network 172.16.1.0 255.255.255.0
[FW2-bgp-default-ipv4]quit
[FW2-bgp-default]quit

```

测试：

PC都填写IP地址：

| 接口     | 状态 | IPv4地址         | IPv6地址 |
|--------|----|----------------|--------|
| G0/0/1 | UP | 192.168.1.2/24 |        |

刷新

接口管理

禁用  启用

IPv4配置：


DHCP  静态

IPv4地址：

掩码地址：

IPv4网关：

启用

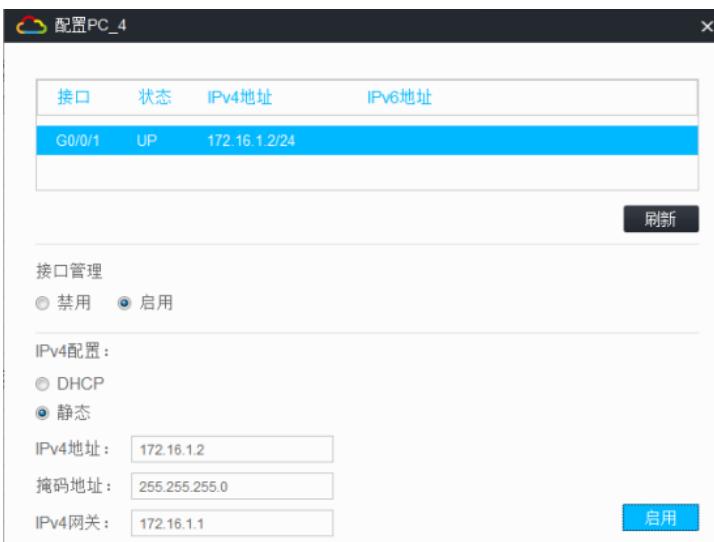

PC之间可以相互PING通:

```
h3c_tpc_fq
PC_1 PC_2 PC_3 PC_4
<H3C>#Mar 30 21:54:30 2020 H3C SHELL/5/SHELL_LOGIN: Console logged in from con0.

<H3C>ping 172.16.1.2
Ping 172.16.1.2 (172.16.1.2): 56 data bytes, press CTRL_C to break
56 bytes from 172.16.1.2: icmp_seq=0 ttl=253 time=1.000 ms
56 bytes from 172.16.1.2: icmp_seq=1 ttl=253 time=2.000 ms
56 bytes from 172.16.1.2: icmp_seq=2 ttl=253 time=2.000 ms
56 bytes from 172.16.1.2: icmp_seq=3 ttl=253 time=2.000 ms
56 bytes from 172.16.1.2: icmp_seq=4 ttl=253 time=2.000 ms

--- Ping statistics for 172.16.1.2 ---
5 packet(s) transmitted, 5 packet(s) received, 0.0% packet loss
round-trip min/avg/max/std-dev = 1.000/1.800/2.000/0.400 ms
<H3C>#Mar 30 21:54:40:212 2020 H3C PING/6/PING_STATISTICS: Ping statistics for 172.16.1.2:
5 packet(s) transmitted, 5 packet(s) received, 0.0% packet loss, round-trip min/avg/max/
std-dev = 1.000/1.800/2.000/0.400 ms.
```

```
h3c_tpc_fq
PC_1 PC_2 PC_3 PC_4
<H3C>#Mar 30 21:54:18:923 2020 H3C SHELL/5/SHELL_LOGIN: Console logged in from con0.

<H3C>ping 192.168.1.2
Ping 192.168.1.2 (192.168.1.2): 56 data bytes, press CTRL_C to break
56 bytes from 192.168.1.2: icmp_seq=0 ttl=253 time=2.000 ms
56 bytes from 192.168.1.2: icmp_seq=1 ttl=253 time=2.000 ms
56 bytes from 192.168.1.2: icmp_seq=2 ttl=253 time=2.000 ms
56 bytes from 192.168.1.2: icmp_seq=3 ttl=253 time=2.000 ms
56 bytes from 192.168.1.2: icmp_seq=4 ttl=253 time=2.000 ms

--- Ping statistics for 192.168.1.2 ---
5 packet(s) transmitted, 5 packet(s) received, 0.0% packet loss
round-trip min/avg/max/std-dev = 2.000/2.000/2.000/0.000 ms
<H3C>#Mar 30 21:54:42:059 2020 H3C PING/6/PING_STATISTICS: Ping statistics for 192.168.1.2:
5 packet(s) transmitted, 5 packet(s) received, 0.0% packet loss, round-trip min/avg/max/
std-dev = 2.000/2.000/2.000/0.000 ms.
```

分别查看FW1、FW2的BGP邻居信息:

```
[FW1]dis bgp peer ipv4
BGP local router ID: 1.1.1.1
Local AS number: 100
Total number of peers: 1          Peers in established state: 1
* - Dynamically created peer
Peer           AS MsgRcvd MsgSent OutQ PrefRcv Up/Down State
10.0.0.2        200    6      0       1 00:02:30 Established
[FW1]
```

```
[FW2]dis bgp peer ipv4
BGP local router ID: 2.2.2.2
Local AS number: 200
Total number of peers: 1          Peers in established state: 1
* - Dynamically created peer
Peer           AS MsgRcvd MsgSent OutQ PrefRcv Up/Down State
10.0.0.1        100    7      0       1 00:02:42 Established
[FW2]
```

分别查看FW1、FW2的路由表:

```
[FW1]dis ip routing-table
Destinations : 18      Routes : 18

Destination/Mask Proto Pre Cost     NextHop      Interface
0.0.0.0/32    Direct 0   0          127.0.0.1    InLoop0
1.1.1.1/32    Direct 0   0          127.0.0.1    InLoop0
10.0.0.0/30   Direct 0   0          10.0.0.1     GE1/0/3
10.0.0.0/32   Direct 0   0          10.0.0.1     GE1/0/3
10.0.0.1/32   Direct 0   0          127.0.0.1    InLoop0
10.0.0.3/32   Direct 0   0          10.0.0.1     GE1/0/3
127.0.0.0/8   Direct 0   0          127.0.0.1    InLoop0
127.0.0.0/32  Direct 0   0          127.0.0.1    InLoop0
127.0.0.1/32  Direct 0   0          127.0.0.1    InLoop0
127.0.0.1/32  Direct 0   0          127.0.0.1    InLoop0
127.255.255.255/32 Direct 0   0          127.0.0.1    InLoop0
172.16.1.0/24  BGP   255 0        10.0.0.2     GE1/0/3
192.168.1.0/24 Direct 0   0          192.168.1.1  GE1/0/2
192.168.1.0/32 Direct 0   0          192.168.1.1  GE1/0/2
192.168.1.1/32 Direct 0   0          127.0.0.1    InLoop0
192.168.1.255/32 Direct 0   0          192.168.1.1  GE1/0/2
224.0.0.0/4   Direct 0   0          0.0.0.0      NULL0
224.0.0.0/24  Direct 0   0          0.0.0.0      NULL0
255.255.255.255/32 Direct 0   0          127.0.0.1    InLoop0
[FW1]
```

```
[FW2]dis ip routing-table
Destinations : 18      Routes : 18

Destination/Mask Proto Pre Cost     NextHop      Interface
0.0.0.0/32    Direct 0   0          127.0.0.1    InLoop0
2.2.2.2/32    Direct 0   0          127.0.0.1    InLoop0
10.0.0.0/30   Direct 0   0          10.0.0.2     GE1/0/3
10.0.0.0/32   Direct 0   0          10.0.0.2     GE1/0/3
10.0.0.2/32   Direct 0   0          127.0.0.1    InLoop0
10.0.0.3/32   Direct 0   0          10.0.0.2     GE1/0/3
127.0.0.0/8   Direct 0   0          127.0.0.1    InLoop0
127.0.0.0/32  Direct 0   0          127.0.0.1    InLoop0
127.0.0.1/32  Direct 0   0          127.0.0.1    InLoop0
127.255.255.255/32 Direct 0   0          127.0.0.1    InLoop0
172.16.1.0/24 Direct 0   0          172.16.1.1  GE1/0/2
172.16.1.0/32 Direct 0   0          172.16.1.1  GE1/0/2
172.16.1.1/32 Direct 0   0          127.0.0.1    InLoop0
172.16.1.255/32 Direct 0   0          172.16.1.1  GE1/0/2
192.168.1.0/24 BGP   255 0        10.0.0.1     GE1/0/3
224.0.0.0/4   Direct 0   0          0.0.0.0      NULL0
224.0.0.0/24  Direct 0   0          0.0.0.0      NULL0
255.255.255.255/32 Direct 0   0          127.0.0.1    InLoop0
[FW2]
```

至此，F1060 EBGP MD5认证典型组网配置案例已完成！