

组网及说明

为了能够实时的收取交换机的syslog信息，需要在交换机部署info-center，同时在IMC纳管相应的设备，即可实现实时收取交换机的syslog信息。

IMC版本为PLAT 7.3 E0506P03

S5820版本信息如下：

H3C Comware Software, Version 7.1.045, Release 2418P06
Copyright (c) 2004-2015 Hangzhou H3C Tech. Co., Ltd. All rights reserved.
H3C S5820V2-48S uptime is 239 weeks, 6 days, 23 hours, 28 minutes
Last reboot reason : USER reboot

Boot image: flash:/s5820v2_5830v2-cmw710-boot-r2418p06.bin
Boot image version: 7.1.045, Release 2418P06
Compiled Aug 07 2015 15:40:53
System image: flash:/s5820v2_5830v2-cmw710-system-r2418p06.bin
System image version: 7.1.045, Release 2418P06
Compiled Aug 07 2015 15:40:53

Slot 1:

Uptime is 29 weeks,2 days,9 hours,27 minutes
S5820V2-48S with 2 Processors
BOARD TYPE: S5820V2-48S
DRAM: 2048M bytes
FLASH: 512M bytes
PCB 1 Version: VER.B
Bootrom Version: 142
CPLD 1 Version: 002
CPLD 2 Version: 002
Release Version: H3C S5820V2-48S-2418P06
Patch Version : None
Reboot Cause : UserReboot
[SubSlot 0] 48SFP Plus

Slot 2:

Uptime is 29 weeks,2 days,9 hours,14 minutes
S5820V2-48S with 2 Processors
BOARD TYPE: S5820V2-48S
DRAM: 2048M bytes
FLASH: 512M bytes
PCB 1 Version: VER.B
Bootrom Version: 142
CPLD 1 Version: 002
CPLD 2 Version: 002
Release Version: H3C S5820V2-48S-2418P06
Patch Version : None
Reboot Cause : UserReboot
[SubSlot 0] 48SFP Plus

配置步骤


S5820 syslog部署：

info-center enable
info-center loghost 10.190.8.7


IMC纳管S5820交换机：



在IMC的“告警”-“syslog管理”-“浏览syslog”通过搜索设备的IP，即可看到该交换机发送上来的syslog:

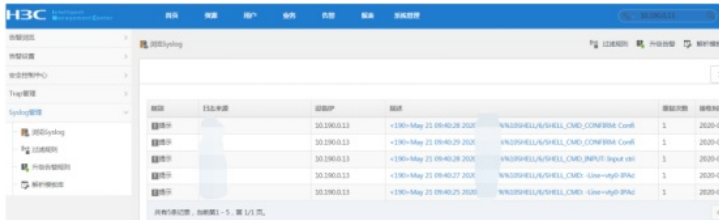

通过点击“描述”下的信息，可以查看到具体的syslog信息:

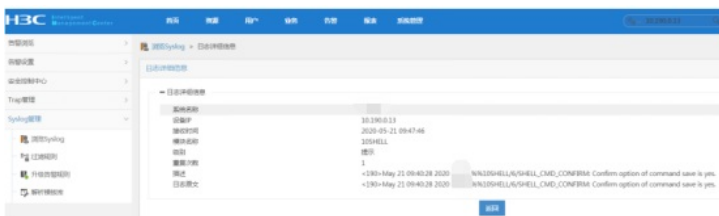

至此，S5820交换机syslog典型组网配置案例已完成!

配置关键点