

# 知 HPE ProLiant DL380 Gen10服务器通过iLO刷新SPS固件

固件升级 吴迪 2020-06-06 发表

## 组网及说明


DL380 Gen10+P408i-a阵列卡

## 问题描述

客户要通过iLO更新SPS固件

## 过程分析


首先登陆到iLO中查看当前SPS的版本

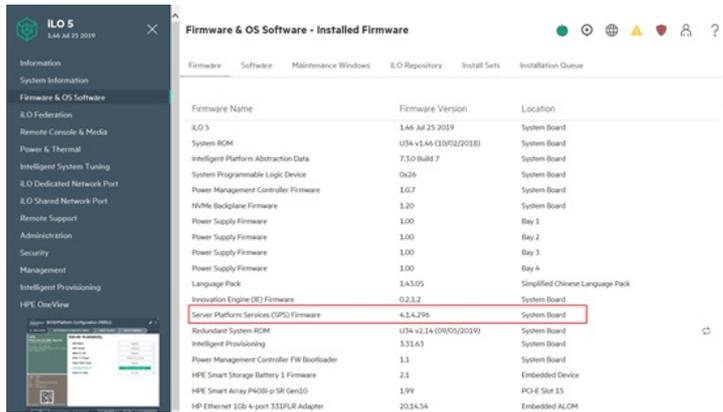


到HPE网站上下载最新SPS版本

[https://support.hpe.com/hpsc/swd/public/detail?swItemId=MTX\\_4c9176ac2e0742f3a8d0ad2a8f#tab-history](https://support.hpe.com/hpsc/swd/public/detail?swItemId=MTX_4c9176ac2e0742f3a8d0ad2a8f#tab-history)


将下载好的文件上传到iLO Repository



选择Upload to iLO Repository

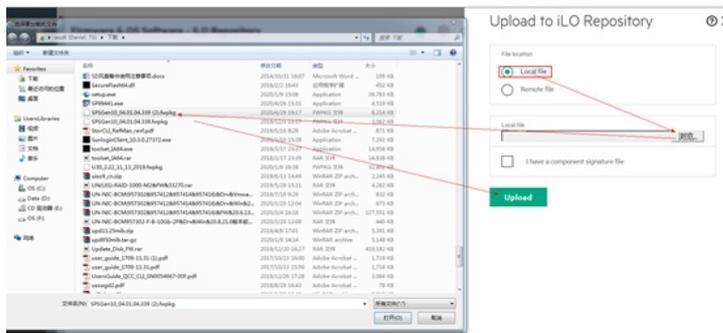

选择Yes, add to the end of the queue

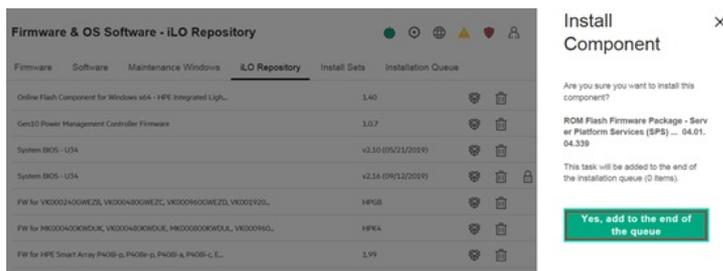

点击安装后会显示为pending状态

**Firmware & OS Software - Installation Queue**

Firmware Software Maintenance Windows iLO Repository Install Sets **Installation Queue**

iLO Dom/Time (UTC) 2020-04-29 09:26

State	Name	Starts	Expires
Pending	ROM Flash Firmware Package - Server Platform Services (SPS)...	Immediately after the associated updater checks	Never

[Remove all](#)

Update Firmware  
Upload to iLO Repository  
Add to Queue

重启下服务器状态会变为In progress

**Firmware & OS Software - Installation Queue**

Firmware Software Maintenance Windows iLO Repository Install Sets **Installation Queue**

iLO Dom/Time (UTC) 2020-04-29 08:49

State	Name	Starts	Expires
In Progress	ROM Flash Firmware Package - Server Platform Services (SPS)...	Immediately after the associated updater checks	Never

[Remove all](#)

Update Firmware  
Upload to iLO Repository  
Add to Queue

## 解决方法

刷新完成会显示complete

**Firmware & OS Software - Installation Queue**

Firmware Software Maintenance Windows iLO Repository Install Sets **Installation Queue**

iLO Dom/Time (UTC) 2020-04-29 08:54

State	Name	Starts	Expires
Complete	ROM Flash Firmware Package - Server Platform Services (SPS)...	N/A	Never

[Remove all](#)

Update Firmware  
Upload to iLO Repository  
Add to Queue

重新查看SPS版本，已经被刷新为最新版本