


组网及说明

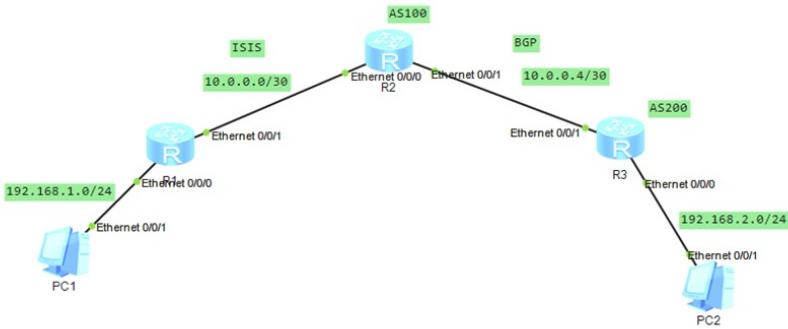

本案例采用ENSP模拟器来部署华为路由器的路由重分布的案例，在该网络中，R1与R2部署ISIS，R2与R3部署BGP。为了实现PC之间的网络互通，需要在R2路由器部署ISIS与BGP重分布。

配置步骤

- 1、按照网络拓扑图配置IP地址。
- 2、部署R1与R2的ISIS。
- 3、部署R2与R3的BGP。
- 4、在R2配置ISIS与BGP重分布。

配置关键点

R1:

```
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>u t d
Info: Current terminal debugging is off.
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R1
[R1]int eth 0/0/0
[R1-Ethernet0/0/0]ip address 192.168.1.1 24
[R1-Ethernet0/0/0]quit
[R1]int eth 0/0/1
[R1-Ethernet0/0/1]ip address 10.0.0.1 30
[R1-Ethernet0/0/1]quit
[R1]isis 1
[R1-isis-1]network-entity 10.0000.0000.0001.00
[R1-isis-1]is-level level-1-2
[R1-isis-1]quit
[R1]int eth 0/0/1
[R1-Ethernet0/0/1]isis enable 1
[R1-Ethernet0/0/1]quit
[R1]int eth 0/0/0
[R1-Ethernet0/0/0]isis enable 1
[R1-Ethernet0/0/0]quit
```

R2:

```
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>u t d
Info: Current terminal debugging is off.
<Huawei>system
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R2
[R2]int eth 0/0/0
[R2-Ethernet0/0/0]ip address 10.0.0.2 30
```

```

[R2-Ethernet0/0/0]quit
[R2]int eth 0/0/1
[R2-Ethernet0/0/1]ip address 10.0.0.5 30
[R2-Ethernet0/0/1]quit
[R2]isis 1
[R2-isis-1]network-entity 10.0000.0000.0002.00
[R2-isis-1]import-route bgp
[R2-isis-1]quit
[R2]int eth 0/0/0
[R2-Ethernet0/0/0]isis enable 1
[R2-Ethernet0/0/0]quit
[R2]int eth 0/0/1
[R2-Ethernet0/0/1]isis enable 1
[R2-Ethernet0/0/1]quit
[R2]bgp 100
[R2-bgp]peer 10.0.0.6 as-number 200
[R2-bgp]peer 10.0.0.6 connect-interface eth 0/0/1
[R2-bgp-af-ipv4]import-route isis 1
[R2-bgp-af-ipv4]peer 10.0.0.6 enable
[R2-bgp-af-ipv4]quit
[R2-bgp]quit

```

R3:

```

<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>u t d
Info: Current terminal debugging is off.
<Huawei>system
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R3
[R3]int eth 0/0/0
[R3-Ethernet0/0/0]ip address 192.168.2.1 24
[R3-Ethernet0/0/0]quit
[R3]int eth 0/0/1
[R3-Ethernet0/0/1]ip address 10.0.0.6 30
[R3-Ethernet0/0/1]quit
[R3]bgp 200
[R3-bgp]peer 10.0.0.5 as-number 100
[R3-bgp]peer 10.0.0.5 connect-interface Ethernet 0/0/1
[R3-bgp]ipv4-family unicast
[R3-bgp-af-ipv4]peer 10.0.0.5 enable
[R3-bgp-af-ipv4]network 192.168.2.0 24
[R3-bgp-af-ipv4]quit
[R3-bgp]quit

```

PC分别填写IP地址，且能相互PING通。

PC1

基础配置 | 命令行 | 组播 | UDP发包工具 | 串口

主机名:

MAC 地址:

IPv4 配置

☒ 静态 ☐ DHCP ☐ 自动获取 DNS 服务器地址

IP 地址: DNS1:

子网掩码: DNS2:

网关:

PC2

基础配置 命令行 组播 UDP发包工具 串口

主机名:

MAC 地址:

IPv4 配置

☒ 静态 ☐ DHCP ☐ 自动获取 DNS 服务器地址

IP 地址: DNS1:

子网掩码: DNS2:

网关:

PC1

基础配置 命令行 组播 UDP发包工具 串口

```
Welcome to use PC Simulator!

PC>ping 192.168.2.2

Ping 192.168.2.2: 32 data bytes, Press Ctrl_C to break
From 192.168.2.2: bytes=32 seq=1 ttl=125 time=219 ms
From 192.168.2.2: bytes=32 seq=2 ttl=125 time=125 ms
From 192.168.2.2: bytes=32 seq=3 ttl=125 time=109 ms
From 192.168.2.2: bytes=32 seq=4 ttl=125 time=109 ms
From 192.168.2.2: bytes=32 seq=5 ttl=125 time=156 ms

--- 192.168.2.2 ping statistics ---
 5 packet(s) transmitted
 5 packet(s) received
 0.00% packet loss
 round-trip min/avg/max = 109/143/219 ms
```

PC2

基础配置 命令行 组播 UDP发包工具 串口

```
Welcome to use PC Simulator!

PC>ping 192.168.1.2

Ping 192.168.1.2: 32 data bytes, Press Ctrl_C to break
From 192.168.1.2: bytes=32 seq=1 ttl=125 time=109 ms
From 192.168.1.2: bytes=32 seq=2 ttl=125 time=125 ms
From 192.168.1.2: bytes=32 seq=3 ttl=125 time=125 ms
From 192.168.1.2: bytes=32 seq=4 ttl=125 time=94 ms
From 192.168.1.2: bytes=32 seq=5 ttl=125 time=140 ms

--- 192.168.1.2 ping statistics ---
 5 packet(s) transmitted
 5 packet(s) received
 0.00% packet loss
 round-trip min/avg/max = 94/118/140 ms

PC>
```

在R1与R2分别使用dis isis peer命令查看到R1、R2已完成ISIS邻居的建立。

```
[R1]dis isis peer

Peer information for ISIS(1)

System Id      Interface      Circuit Id      State HoldTime Type      PRI
-----
0000.0000.0002 Eth0/0/1       0000.0000.0001.01 Up    23s      L1(L1L2) 64
0000.0000.0002 Eth0/0/1       0000.0000.0001.01 Up    30s      L2(L1L2) 64

Total Peer(s): 2
[R1]
```

```
[R2]dis isis peer

Peer information for ISIS(1)

System Id      Interface      Circuit Id      State HoldTime Type      PRI
-----
0000.0000.0001 Eth0/0/0       0000.0000.0001.01 Up    7s       L1(L1L2) 64
0000.0000.0001 Eth0/0/0       0000.0000.0001.01 Up    8s       L2(L1L2) 64

Total Peer(s): 2
[R2]
```

分别在R2与R3使用dis bgp peer可以看到R2与R3已完成BGP邻居建立。

```
[R2]dis bgp peer

BGP local router ID : 10.0.0.2
Local AS number : 100
Total number of peers : 1          Peers in established state : 1

  Peer          V          AS  MsgRcvd  MsgSent  OutQ  Up/Down          State Pre
fRcv
  10.0.0.6      4          200      4        7      0 00:01:15 Established
  1
[R2]
```

```
[R3]dis bgp peer

BGP local router ID : 192.168.2.1
Local AS number : 200
Total number of peers : 1          Peers in established state : 1

  Peer          V          AS  MsgRcvd  MsgSent  OutQ  Up/Down          State Pre
fRcv
  10.0.0.5      4          100      6        4      0 00:01:34 Established
  3
[R3]
```

分别在R1、R2、R3使用dis ip routing-table命令查看路由表，均已学习到了相应的路由。

```
[R1]dis ip routing-table
Route Flags: R - relay, D - download to fib
-----
Routing Tables: Public
  Destinations : 8          Routes : 8

Destination/Mask    Proto    Pre  Cost           Flags NextHop         Interface
-----
  10.0.0.0/30       Direct   0    0              D    10.0.0.1          Ethernet0/0/1
  10.0.0.1/32       Direct   0    0              D    127.0.0.1          Ethernet0/0/1
  10.0.0.4/30       ISIS-L1  15   20             D    10.0.0.2          Ethernet0/0/1
  127.0.0.0/8       Direct   0    0              D    127.0.0.1          InLoopBack0
  127.0.0.1/32      Direct   0    0              D    127.0.0.1          InLoopBack0
  192.168.1.0/24    Direct   0    0              D    192.168.1.1        Ethernet0/0/0
  192.168.1.1/32    Direct   0    0              D    127.0.0.1          Ethernet0/0/0
  192.168.2.0/24    ISIS-L2  15   74             D    10.0.0.2          Ethernet0/0/1
[R1]
```

```
[R2]dis ip routing-table
Route Flags: R - relay, D - download to fib
-----
Routing Tables: Public
  Destinations : 8          Routes : 8

Destination/Mask    Proto    Pre  Cost           Flags NextHop         Interface
-----
  10.0.0.0/30       Direct   0    0              D    10.0.0.2          Ethernet0/0/0
  10.0.0.2/32       Direct   0    0              D    127.0.0.1          Ethernet0/0/0
  10.0.0.4/30       Direct   0    0              D    10.0.0.5          Ethernet0/0/1
  10.0.0.5/32       Direct   0    0              D    127.0.0.1          Ethernet0/0/1
  127.0.0.0/8       Direct   0    0              D    127.0.0.1          InLoopBack0
  127.0.0.1/32      Direct   0    0              D    127.0.0.1          InLoopBack0
  192.168.1.0/24    ISIS-L1  15   20             D    10.0.0.1          Ethernet0/0/0
  192.168.2.0/24    EGBP     255  0              RD   10.0.0.6          Ethernet0/0/1
[R2]
```

```
[R3]dis ip routing-table
Route Flags: R - relay, D - download to fib
-----
Routing Tables: Public
  Destinations : 8          Routes : 8

Destination/Mask    Proto    Pre  Cost           Flags NextHop         Interface
-----
  10.0.0.0/30       EGBP     255  0              RD   10.0.0.5          Ethernet0/0/1
  10.0.0.4/30       Direct   0    0              D    10.0.0.6          Ethernet0/0/1
  10.0.0.6/32       Direct   0    0              D    127.0.0.1          Ethernet0/0/1
  127.0.0.0/8       Direct   0    0              D    127.0.0.1          InLoopBack0
  127.0.0.1/32      Direct   0    0              D    127.0.0.1          InLoopBack0
  192.168.1.0/24    EGBP     255  20             RD   10.0.0.5          Ethernet0/0/1
  192.168.2.0/24    Direct   0    0              D    192.168.2.1        Ethernet0/0/0
  192.168.2.1/32    Direct   0    0              D    127.0.0.1          Ethernet0/0/0
[R3]
```

至此，华为路由器ISIS与BGP典型组网配置案例已完成。