


需要提取机箱showall日志，但无条件登录web页面提取。

首先确认可以ping通HPE Onboard administrator IP。




利用putty或同类软件访问HPE Onboard administrator。

1.设置putty软件自动保存位置（包括设置所有会话输出，选择自定义的保存地址）：

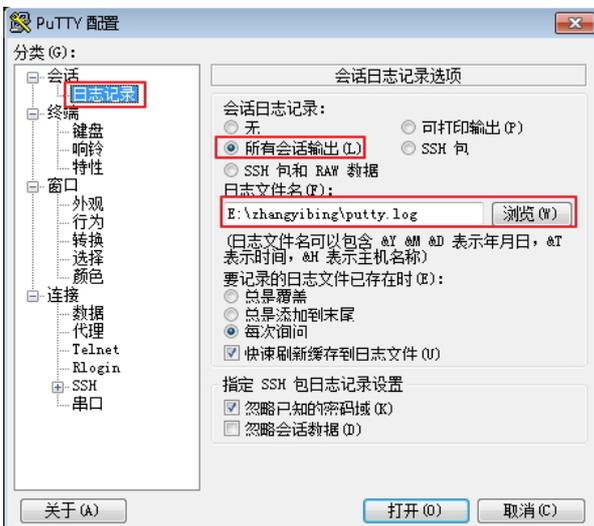

2. 通过putty访问Onboard administrator，输入IP地址，选择telnet方式，点击打开：

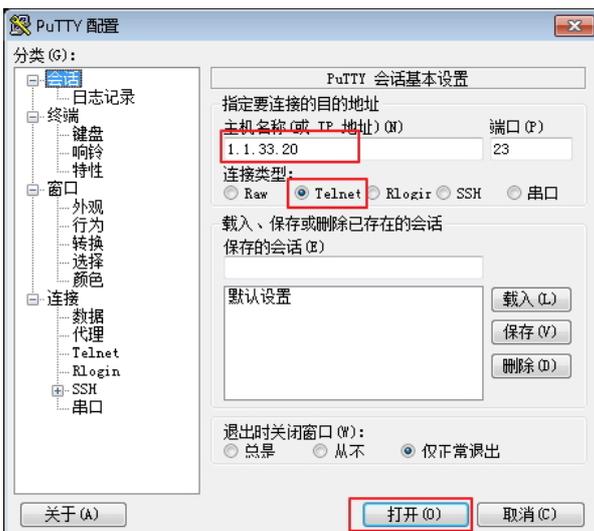

登录HPE onboard administrator提取showall。

1.输入用户名及密码，密码正确输入即可，屏幕显示不出来。

```
1.1.33.20 - PuTTY
-----
WARNING: This is a private system. Do not attempt to login unless you are an
authorized user. Any authorized or unauthorized access and use may be moni-
tored and can result in criminal or civil prosecution under applicable law.
-----

Firmware Version: 4.70
Built: 05/18/2017 @ 05:32
OA Bay Number: 1
OA Role: Active
c7000-Rack1-up-OA1 login: zhangyibing
password:

HP BladeSystem Onboard Administrator
(C) Copyright 2006-2017 Hewlett Packard Enterprise Development LP

Type 'HELP' to display a list of valid commands.
Type 'HELP <command>' to display detailed information about a specific command.
Type 'HELP HELP' to display more detailed information about the help system.

c7000-Rack1-up-OA1> █
```

2. 输入show all, 按回车:

```
HP BladeSystem Onboard Administrator
(C) Copyright 2006-2017 Hewlett Packard Enterprise Development LP

Type 'HELP' to display a list of valid commands.
Type 'HELP <command>' to display detailed information about a specific command.
Type 'HELP HELP' to display more detailed information about the help system.

c7000-Rack1-up-OA1> show all █
```

3. 日志提取过程是自动的, 提取完成是如下界面:

```
Jan 8 16:51:26 OA: ipv6StaticRouteDestination1:
Jan 8 16:51:26 OA: ipv6StaticRouteGateway1:
Jan 8 16:51:26 OA: ipv6StaticRouteDestination2:
Jan 8 16:51:26 OA: ipv6StaticRouteGateway2:
Jan 8 16:51:28 OA: [0] - Administrator::-1:0:1, System Administrator, :/usr/bi
n/cli
Jan 8 16:51:28 OA: [1] - test1::-500:2:A, :/usr/bin/cli
Jan 8 16:51:29 OA: TERM snmpd.
Jan 8 16:51:29 OA: KILL poll-ntp.
Jan 9 09:34:16 OA: [0] - Administrator::-1:0:1, System Administrator, :/usr/bi
n/cli
Jan 9 09:34:16 OA: [1] - test1::-500:2:A, :/usr/bin/cli
Jan 9 09:34:17 OA: TERM snmpd.
Jan 9 09:34:17 OA: KILL poll-ntp.

c7000-Rack1-up-OA1> █
```

查看showall日志文件。

通过之前自定义的保存地址查找到该文件即是showall日志:



