

组网及说明

1 配置需求或说明


1.1 适用产品系列

本案例适用于如S3600V2-28TP-EI、S3600V2-28TP-SI等S3600V2系列的交换机。

1.2 配置需求

SWA、SWB、SWC、SWD都运行OSPF，并将整个自治系统划分为3个区域。其中Switch A和Switch B作为ABR来转发区域之间的路由。配置完成后，每台交换机都应学到AS内的到所有网段的路由。

2 组网图

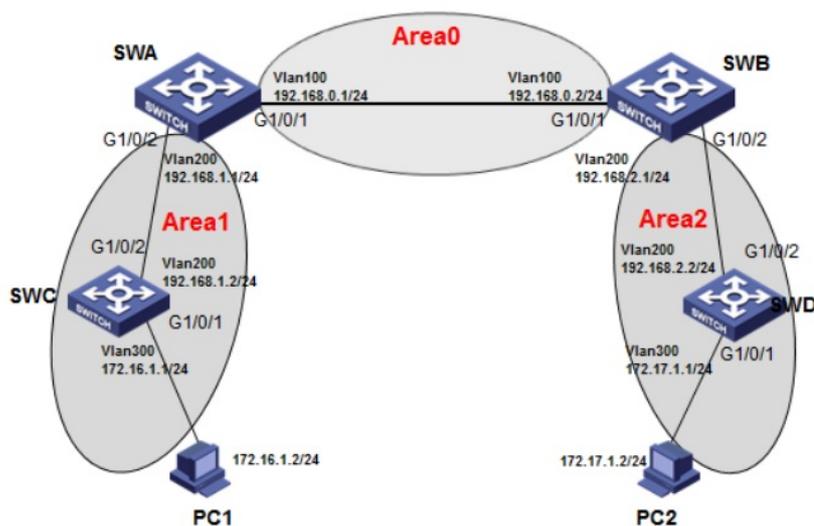

配置步骤

3 配置步骤

3.1 SWA配置

#创建vlan100和vlan200，并把G1/0/1口加入vlan100、1/0/2口加入vlan200，并且配置vlan100和vlan200的虚接口地址

```
system -view
```

```
System View: return to User View with Ctrl+Z.
```

```
[H3C]vlan 100
```

```
[H3C-vlan100]port GigabitEthernet 1/0/1
```

```
[H3C-vlan100]quit
```

```
[H3C]vlan 200
```

```
[H3C-vlan200]port GigabitEthernet 1/0/2
```

```
[H3C-vlan200]quit
```

```
[H3C]interface vlan 100
```

```
[H3C-Vlan-interface100]ip address 192.168.0.1 255.255.255.0
```

```
[H3C-Vlan-interface100]quit
```

```
[H3C]interface vlan 200
```

```
[H3C-Vlan-interface200]ip address 192.168.1.1 255.255.255.0
```

```
[H3C-Vlan-interface200]quit
```

#启动ospf协议，并设置路由器的router id

```
[H3C]ospf 1 router-id 192.168.1.1
```

#配置区域0并且发布网段

```
[H3C-ospf-1]area 0
```

```
[H3C-ospf-1-area-0.0.0.0]network 192.168.0.0 0.0.0.255
```

```
[H3C-ospf-1-area-0.0.0.0]quit
```

#配置区域1并且发布网段

```
[H3C-ospf-1]area 1
```

```
[H3C-ospf-1-area-0.0.0.1]network 192.168.1.0 0.0.0.255
```

```
[H3C-ospf-1-area-0.0.0.1]quit
[H3C-ospf-1]quit
#保存配置
[H3C]save force
```

3.2 SWB配置

#创建vlan100和vlan200，并把G1/0/1口加入vlan100、1/0/2口加入vlan200，并且配置vlan100和vlan200的虚接口地址

```
system -view
System View: return to User View with Ctrl+Z.
[H3C]vlan 100
[H3C-vlan100]port GigabitEthernet 1/0/1
[H3C-vlan100]quit
[H3C]vlan 200
[H3C-vlan200]port GigabitEthernet 1/0/2
[H3C-vlan200]quit
[H3C]interface vlan 100
[H3C-Vlan-interface100]ip address 192.168.0.2 255.255.255.0
[H3C-Vlan-interface100]quit
[H3C]interface vlan 200
[H3C-Vlan-interface200]ip address 192.168.2.1 255.255.255.0
[H3C-Vlan-interface200]quit
#启动ospf协议，并设置路由器的router id
[H3C]ospf 1 router-id 192.168.2.1
#配置区域0并且发布网段
[H3C-ospf-1]area 0
[H3C-ospf-1-area-0.0.0.0]network 192.168.0.0 0.0.0.255
[H3C-ospf-1-area-0.0.0.0]quit
#配置区域2并且发布网段
[H3C-ospf-1]area 2
[H3C-ospf-1-area-0.0.0.2]network 192.168.2.0 0.0.0.255
[H3C-ospf-1-area-0.0.0.2]quit
[H3C-ospf-1]quit
#保存配置
[H3C]save force
```

3.3 SWC配置

#创建vlan200和vlan300，并把G1/0/1口加入vlan300、1/0/2口加入vlan200，并且配置vlan300和vlan200的虚接口地址

```
system -view
System View: return to User View with Ctrl+Z.
[H3C]vlan 300
[H3C-vlan300]port GigabitEthernet 1/0/1
[H3C-vlan300]quit
[H3C]vlan 200
[H3C-vlan200]port GigabitEthernet 1/0/2
[H3C-vlan200]quit
[H3C]interface vlan 300
[H3C-Vlan-interface300]ip address 172.16.1.1 255.255.255.0
[H3C-Vlan-interface300]quit
[H3C]interface vlan 200
[H3C-Vlan-interface200]ip address 192.168.1.2 255.255.255.0
[H3C-Vlan-interface200]quit
#启动ospf协议，并设置路由器的router id
[H3C]ospf 1 router-id 192.168.1.2
#配置区域1并且发布网段
[H3C-ospf-1]area 1
[H3C-ospf-1-area-0.0.0.1]network 192.168.1.0 0.0.0.255
[H3C-ospf-1-area-0.0.0.1]network 172.16.1.0 0.0.0.255
[H3C-ospf-1-area-0.0.0.1]quit
[H3C-ospf-1]quit
#保存配置
[H3C]save force
```

3.4 SWD配置

#创建vlan200和vlan300, 并把G1/0/1口加入vlan300、1/0/2口加入vlan200, 并且配置vlan300和vlan200的虚接口地址

```
system -view
System View: return to User View with Ctrl+Z.
[H3C]vlan 300
[H3C-vlan300]port GigabitEthernet 1/0/1
[H3C-vlan300]quit
[H3C]vlan 200
[H3C-vlan200]port GigabitEthernet 1/0/2
[H3C-vlan200]quit
[H3C]interface vlan 300
[H3C-Vlan-interface300]ip address 172.17.1.1 255.255.255.0
[H3C-Vlan-interface300]quit
[H3C]interface vlan 200
[H3C-Vlan-interface200]ip address 192.168.2.2 255.255.255.0
[H3C-Vlan-interface200]quit
#启动ospf协议, 并设置路由器的router id
[H3C]ospf 1 router-id 192.168.2.2
#配置区域1并且发布网段
[H3C-ospf-1]area 2
[H3C-ospf-1-area-0.0.0.2]network 192.168.2.0 0.0.0.255
[H3C-ospf-1-area-0.0.0.2]network 172.17.1.0 0.0.0.255
[H3C-ospf-1-area-0.0.0.2]quit
[H3C-ospf-1]quit
#保存配置
[H3C]save force
```

3.5 验证配置

#查看Switch A的OSPF邻居

```
[SWA]display ospf peer
      OSPF Process 1 with Router ID 192.168.1.1
      Neighbor Brief Information

Area: 0.0.0.0
Router ID   Address      Pri Dead-Time State      Interface
192.168.2.1 192.168.0.2 1 32   Full/BDR   Vlan100
Area: 0.0.0.1
Router ID   Address      Pri Dead-Time State      Interface
192.168.1.2 192.168.1.2 1 36   Full/BDR   Vlan200
```

#查看Switch A的OSPF路由信息

```
[SWA]display ospf routing

      OSPF Process 1 with Router ID 192.168.1.1
      Routing Table

      Topology base (MTID 0)

Routing for network
Destination  Cost  Type  NextHop  AdvRouter  Area
172.16.1.0/24  2    Stub  192.168.1.2  192.168.1.2  0.0.0.1
172.17.1.0/24  3    Inter 192.168.0.2  192.168.2.1  0.0.0.0
192.168.0.0/24  1    Transit 0.0.0.0  192.168.1.1  0.0.0.0
192.168.1.0/24  1    Transit 0.0.0.0  192.168.1.1  0.0.0.1
192.168.2.0/24  2    Inter 192.168.0.2  192.168.2.1  0.0.0.0
```

Total nets: 5

Intra area: 3 Inter area: 2 ASE: 0 NSSA: 0

#查看Switch A的路由表信息, 有到172.16.1.0、172.17.1.0、192.168.2.0的路由

```
[SWA]display ip routing-table
Destinations : 19   Routes : 19
Destination/Mask  Proto  Pre Cost    NextHop    Interface
0.0.0.0/32       Direct 0 0      127.0.0.1  InLoop0
127.0.0.0/8      Direct 0 0      127.0.0.1  InLoop0
```

```
127.0.0.0/32   Direct 0 0      127.0.0.1   InLoop0
127.0.0.1/32   Direct 0 0      127.0.0.1   InLoop0
127.255.255.255/32 Direct 0 0      127.0.0.1   InLoop0
172.16.1.0/24   O_INTRA 10 2      192.168.1.2   Vlan200
172.17.1.0/24   O_INTER 10 3      192.168.0.2   Vlan100
192.168.0.0/24   Direct 0 0      192.168.0.1   Vlan100
192.168.0.0/32   Direct 0 0      192.168.0.1   Vlan100
192.168.0.1/32   Direct 0 0      127.0.0.1   InLoop0
192.168.0.255/32 Direct 0 0      192.168.0.1   Vlan100
192.168.1.0/24   Direct 0 0      192.168.1.1   Vlan200
192.168.1.0/32   Direct 0 0      192.168.1.1   Vlan200
192.168.1.1/32   Direct 0 0      127.0.0.1   InLoop0
192.168.1.255/32 Direct 0 0      192.168.1.1   Vlan200
192.168.2.0/24   O_INTER 10 2      192.168.0.2   Vlan100
224.0.0.0/4     Direct 0 0      0.0.0.0      NULL0
224.0.0.0/24     Direct 0 0      0.0.0.0      NULL0
255.255.255.255/32 Direct 0 0      127.0.0.1   InLoop0
```

PC1 ping PC2 正常通信

C:\Users\mfw2656>ping 172.17.1.2

Ping 172.17.1.2 (172.17.1.2): 56 data bytes, press CTRL_C to break

56 bytes from 172.17.1.2: icmp_seq=0 ttl=254 time=8.000 ms

56 bytes from 172.17.1.2: icmp_seq=1 ttl=254 time=2.000 ms

56 bytes from 172.17.1.2: icmp_seq=2 ttl=254 time=3.000 ms

56 bytes from 172.17.1.2: icmp_seq=3 ttl=254 time=3.000 ms

172.17.1.2的 Ping 统计信息:

数据包: 已发送 = 4, 已接收 = 4, 丢失 = 0 (0% 丢失),

返程的估计时间(以毫秒为单位):

最短 = 2ms, 最长 = 3ms, 平均 = 2ms

配置关键点