

# 知 HPE StoreVirtual 3200 SVMC界面重启控制器

存储配置 孙清雷 2019-04-08 发表

## 组网及说明


受测设备为StoreVirtual 3200 iSCSI

## 配置步骤


测试中，将重启2号控制器。



通过1号控制器管理端口登录SVMC界面。

StoreVirtual > Storage Controllers, 左侧选择2号控制器, Actions - Reboot.

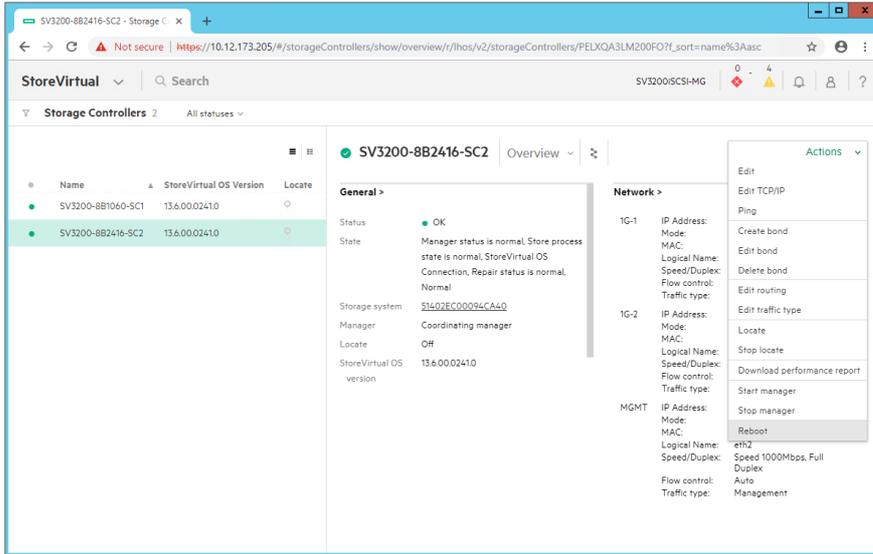


点选Reboot, 延迟时间设置为0。

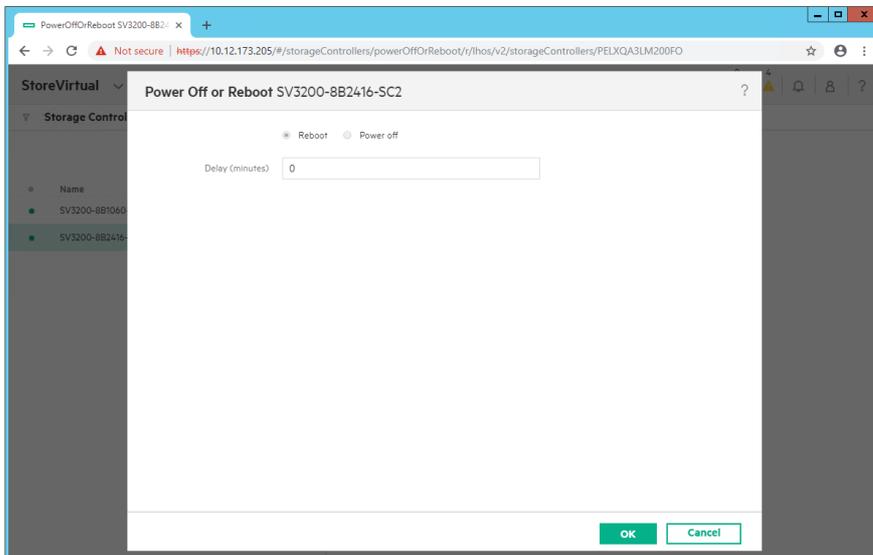


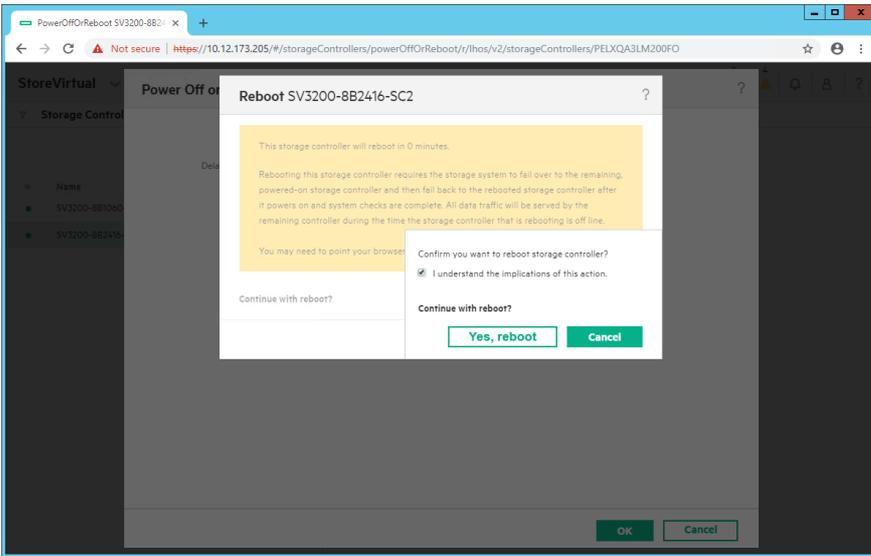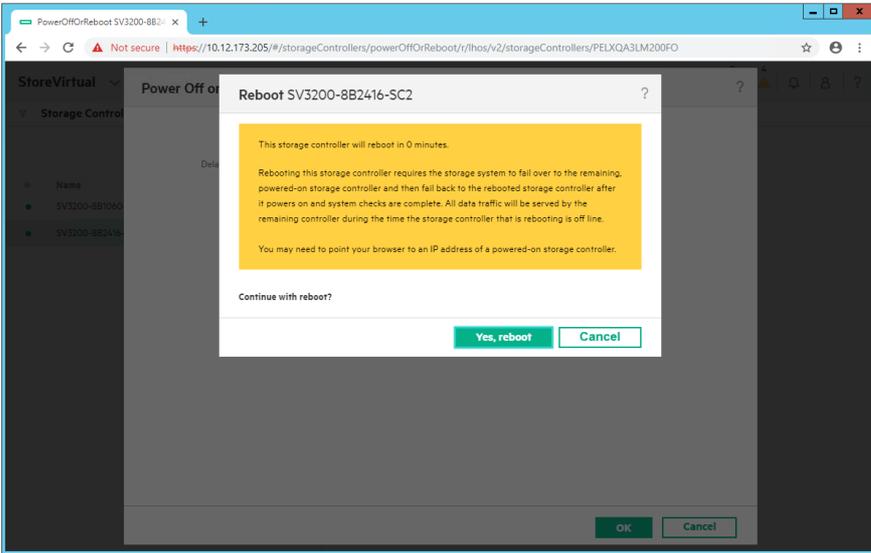



2号控制器已开始重启。

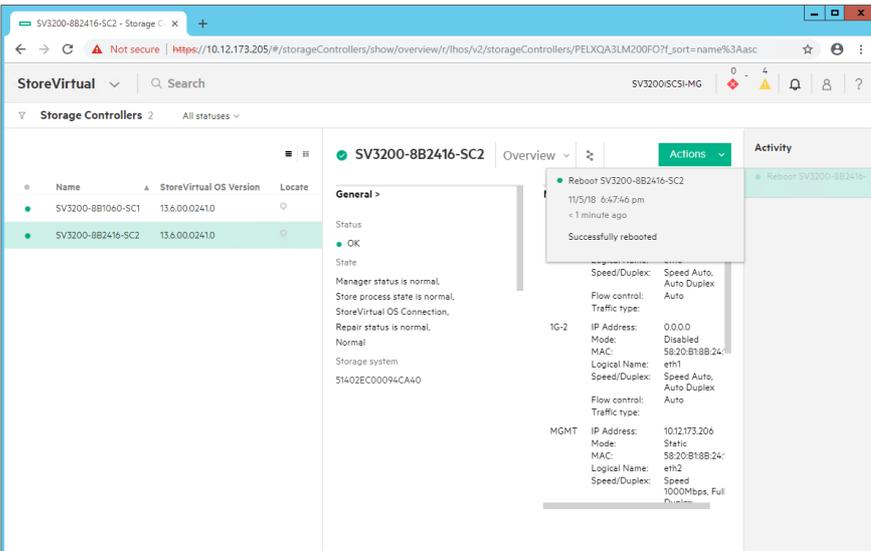

2号控制器重启过程中，将显示为脱机状态。

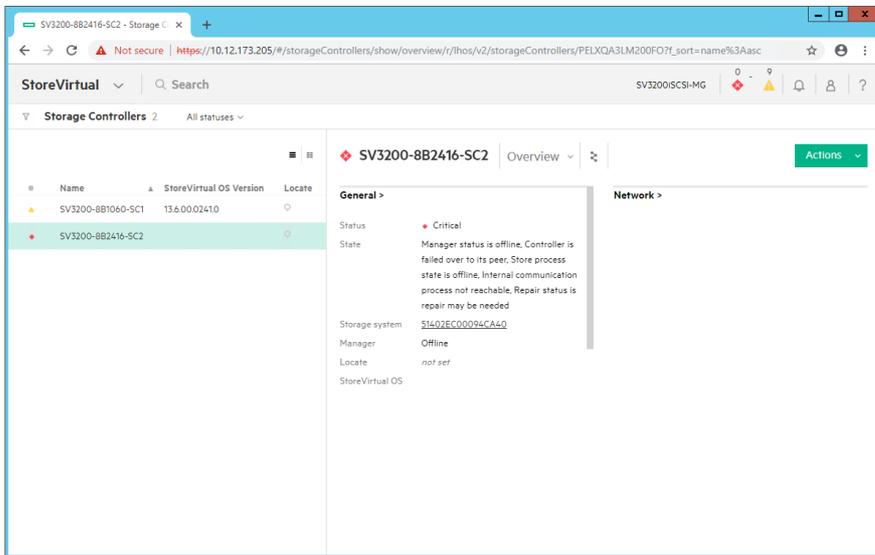

存储系统发生故障转移，由1号控制器负责数据服务。

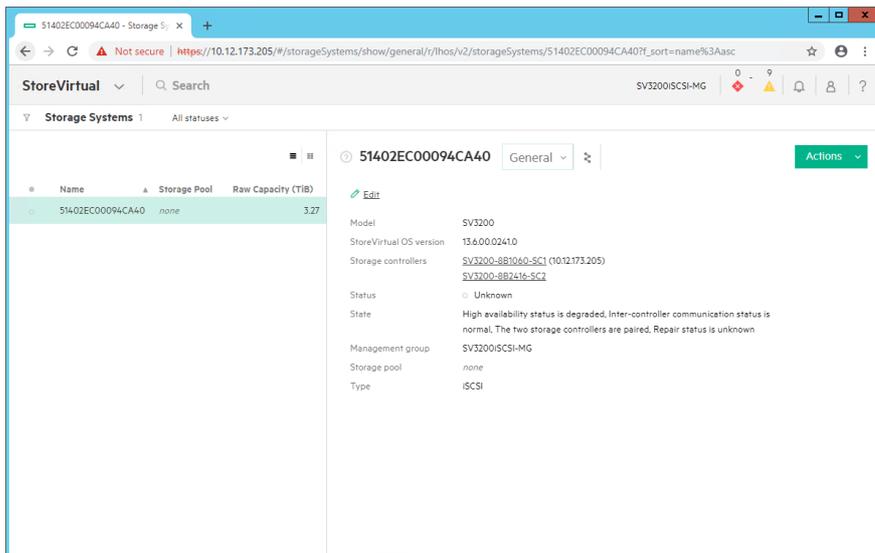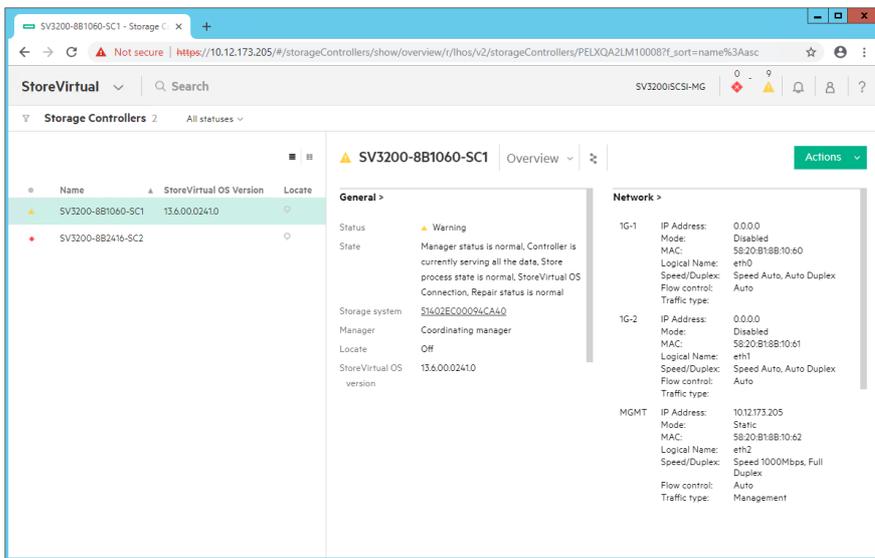

2号控制器重启完成。

SV3200-8B2416-SC2 - Storage C

Not secure | https://10.12.173.205/#/storageControllers/show/overview/r/ihos/v2/storageControllers/PELXQA3LM200FO

StoreVirtual SV3200SCSI-MG

Storage Controllers 2 All statuses

Name	StoreVirtual OS Version	Locate
SV3200-8B1060-SC1	13.6.0.02410	
SV3200-8B2416-SC2	13.6.0.02410	

**SV3200-8B2416-SC2** Overview

**General >**

Status: OK  
 State: Manager status is normal, Store process state is normal, Repair status is normal, Normal

Storage system: 51402EC00094CA40  
 Manager: Normal  
 Locate: Off  
 StoreVirtual OS version: 13.6.0.02410

**Network >**

1G-1  
 IP Address: 0.0.0.0  
 Mode: Disabled  
 MAC: 58:20:B1:8B:24:16  
 Logical Name: eth0  
 Speed/Duplex: Speed Auto, Auto Duplex  
 Flow control: Auto  
 Traffic type:

1G-2  
 IP Address: 0.0.0.0  
 Mode: Disabled  
 MAC: 58:20:B1:8B:24:17  
 Logical Name: eth1  
 Speed/Duplex: Speed Auto, Auto Duplex  
 Flow control: Auto  
 Traffic type:

MGMT  
 IP Address: 10.12.173.206  
 Mode: Static  
 MAC: 58:20:B1:8B:24:18  
 Logical Name: eth2  
 Speed/Duplex: Speed 1000Mbps, Full Duplex  
 Flow control: Auto  
 Traffic type: Management

51402EC00094CA40 - Storage S

Not secure | https://10.12.173.205/#/storageSystems/show/overview/r/ihos/v2/storageSystems/51402EC00094CA40

StoreVirtual SV3200SCSI-MG

Storage Systems 1 All statuses

Name	Storage Pool	Raw Capacity (TiB)
51402EC00094CA40	none	3.27

**51402EC00094CA40** Overview

**General >**

Model: SV3200  
 StoreVirtual OS version: 13.6.0.02410  
 Storage controllers: SV3200-8B1060-SC1 (10.12.173.205), SV3200-8B2416-SC2 (10.12.173.206)  
 Status: OK  
 State: High availability status is highly available, Inter-controller

**Capacity >**

Raw capacity: 3.27 TiB  
 RAID capacity: 2.08 TiB

**Licenses >**

Licensed for: none

**Storage >**

RAID devices: 2  
 RAID status: OK

Configured disks: 12 disks  
 Configured disks status: OK

配置关键点