


知 IPS插卡AV特征库手动升级报UCIF升级失败

License 软件升级 孙兆强 2016-09-08 发表

IPS插卡手动升级时报UCIF错误，格式化后设备自检全部正常。将格式化之前导出的配置导入重启后，设备自检又报UCIF失败，且特征库升级失败。

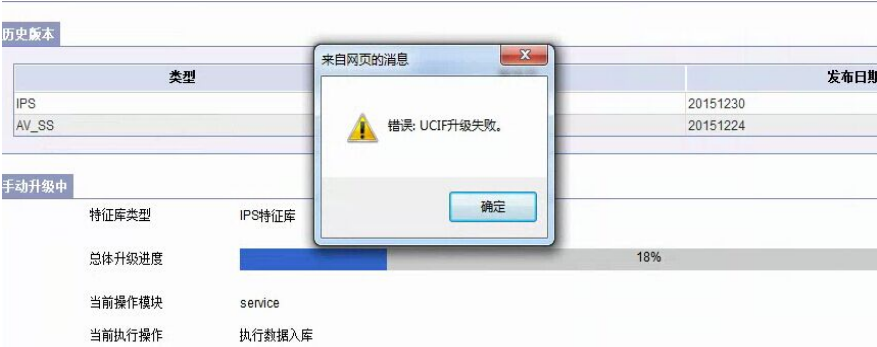

格式化自检成功但是，导入配置重新启动后，设备自检UCIF 失败。

```
System is starting...
INIT: version 2.86 booting814ece48 ...
Configuring kernel parameters:          [ OK ]
Timed out waiting for time change.
Setting clock:                          [ OK ]
Setting hostname localhost.localdomain: [ OK ]
Checking filesystems:                   [ OK ]
Mounting local filesystems:             [ OK ]
Enabling swap space:                    [ OK ]
Starting Distributor:                   [ OK ]
Starting fs:                            [ OK ]
Starting os wd:                         [ OK ]
Starting drv_after_kern:                 [ OK ]
Starting os modules:                    [ OK ]
Starting zebra:                         [ OK ]
Starting dbinit:                        [ OK ]
Starting MySQL                          [ OK ]
Starting db_upgrade:                    [ OK ]
Starting if:                            [ OK ]
Starting syslog:                        [ OK ]
Starting kernel modules:                [ OK ]
Starting cdevnod:                       [ OK ]
Starting cfginit:                       [ OK ]
Starting portinit:                      [ OK ]
Starting seg:                           [ OK ]
Starting session:                       [ OK ]
Starting synfld:                        [ OK ]
Starting nass:                          [ OK ]
Starting uaae:                          [ OK ]
Starting userm:                         [ OK ]
Starting blist:                         [ OK ]
Starting sied:                         [ OK ]
Starting netstream:                     [ OK ]
Starting datalogd:                      [ OK ]
Starting msp:                           [ OK ]
Starting nass_history_report:            [ OK ]
Starting ddos:                          [ OK ]
Starting antispam_daemon:                [ OK ]
Starting ubc:                           [ OK ]
Starting ucif:                           [ FAILED ]
Starting ucif upgrade: Signatures AVSignatures [ OK ]
Starting plug:                          [ OK ]
Starting qos:                           [ OK ]
```

```
Starting drv_after_data:          [ OK ]
Starting acfp_syn_drv:           [ OK ]
Starting useridt:                [ OK ]
Starting ifmd:                   [ OK ]
Starting route:                  [ OK ]
Starting ifsynd:                 [ OK ]
Starting aclm:                   [ OK ]
Starting timer:                  [ OK ]
Starting devmd:                  [ OK ]
Starting snmpd:                  [ OK ]
Starting maild:                  [ OK ]
Starting l2fbd:                  [ OK ]
Starting isc_daemon:             [ OK ]
Starting acseic-daemon:          [ OK ]
Starting rifmond:                [ OK ]
Starting userradius:             [ OK ]
Starting acfpclientd:            [ OK ]
Starting httpd:                  [ OK ]
Starting url_cat_agent:          [ OK ]
Starting ptrace_daemon:          [ OK ]
Starting paf_init_aaa:           [ OK ]
Starting session_go:             [ OK ]
Starting monit:                  [ OK ]
Starting license_daemon:         [ OK ]
Starting aaa_daemon:             [ OK ]
Starting ramdb2disk:             [ OK ]
Starting drv_system_up:          [ OK ]
Starting vtysh:
```

iware平台报UCIF错误是底层数据库损坏，需要格式化CF卡，重新进行分区。格式化时自检正常，而导入配置后报UCIF错误是因为导出的配置也是损坏的数据。

- 1.如果报UICF错误可以先在web界面恢复出厂设置，如果没成功再进入命令行进行彻底格式化。
- 2.格式化后，导入配置重启如果报UCIF自检失败，只能将配置删除（恢复出厂设置）再进行特征库升级。然后重新进行配置。
- 3.格式化之前要将license进行导出备份，导出的license文件如果出现损坏只能联系办事处走解绑流程。