

知 Configuration of VRRP backup group port monitor on S3600

陈玉龙 2007-04-10 发表

Configuration of VRRP backup group port monitor on S3600

1 Network requirements:

Backup group would re-elect Master again soon after monitor port shutdown.


Master actual ip address: 10.100.10.2

Backup actual ip address: 10.100.10.3

VRRP Virtual ip address: 10.100.10.1

Configure E1/0/1 with port monitor function. When this port shutdown, Master priority would decrease 50, and result in re-election Master in Backup group 1.

2 Network diagram:

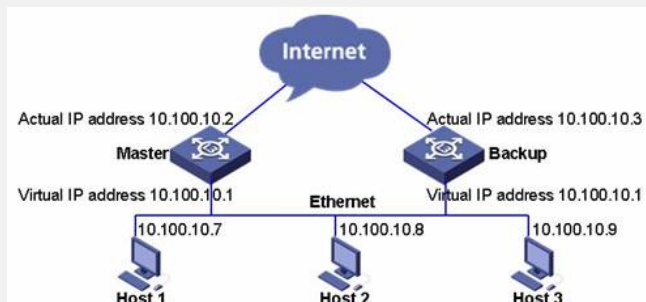

3 Configuration procedure:

Master:

3.1 Enter system view:

```
<H3C> system-view
```

3.2 Create Vlan 2:

```
[H3C] vlan 2
```

```
[H3C-vlan2] port Ethernet1/0/1
```

```
[H3C-vlan2] quit
```

3.3 Enter Ethernet1/0/1, enable VRRP Track function:

```
[H3C] interface Ethernet1/0/1
```

```
[H3C-Ethernet1/0/1] vrrp vlan-interface 2 vrid 1 track reduced 50
```

4 Configuration Tips:

VRRP Backup group port monitor function would monitor physical link status, once it shut down, it would decrease the VRRP priority of this switch.