


### H3C S3500-EA NQA DLSw测试的典型配置

#### 一、组网需求:

使用DLSw功能测试DLSw设备的响应时间。

#### 二、组网图:

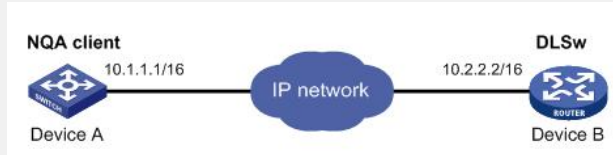

#### 三、配置步骤:

# 创建DLSw类型的测试组并配置相关测试参数。

```
<DeviceA> system-view
```

```
[DeviceA] nqa entry admin test
```

```
[DeviceA-nqa-admin-test] type dlsw
```

```
[DeviceA-nqa-admin-test-dlsw] destination ip 10.2.2.2
```

```
[DeviceA-nqa-admin-test-dlsw] quit
```

# 启动测试操作。

```
[DeviceA] nqa schedule admin test start-time now lifetime forever
```

# 测试执行一段时间后, 停止DLSw测试操作。

```
[DeviceA] undo nqa schedule admin test
```

# 显示DLSw测试中最后一次测试的结果。

```
[DeviceA] display nqa result admin test
```

```
NQA entry(admin admin, tag test) test results:
```

```
Destination IP address: 10.2.2.2
```

```
Send operation times: 1      Receive response times: 1
```

```
Min/Max/Average round trip time: 19/19/19
```

```
Square-Sum of round trip time: 361
```

```
Last succeeded probe time: 2007-11-22 10:40:27.7
```

```
Extend results:
```

```
Packet lost in test: 0%
```

```
Failures due to timeout: 0
```

```
Failures due to disconnect: 0
```

```
Failures due to no connection: 0
```

```
Failures due to sequence error: 0
```

```
Failures due to internal error: 0
```

```
Failures due to other errors: 0
```

# 显示DLSw测试的历史记录。

```
[DeviceA] display nqa history admin test
```

```
NQA entry(admin admin, tag test) history record(s):
```

Index	Response	Status	Time
1	19	Succeeded	2007-11-22 10:40:27.7

#### 四、配置关键点:

无.