


无线本地MAC认证终端与SSID绑定典型案例

进程监控和维护配置 DNS 孟普 2016-12-06 发表

无线控制器做本地MAC认证，现场有两个SSID，客户需求将用户分为两个组，分别从不同的SSID接入。

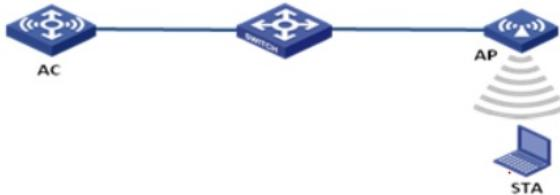

基本的DHCP、VLAN划分、AP注册等基本配置在这里不一一介绍，只摘取认证及绑定的相关配置，更容易理解该需求的关键配置：

```
domain default enable system//将默认的认证域设为system
```

```
#
```

```
port-security enable//使能端口安全功能
```

```
#
```

```
domain system
```

```
access-limit disable
```

```
state active
```

```
idle-cut disable
```

```
self-service-url disable
```

```
# 设置MAC认证的用户名密码，认证类型，授权等级，以及配置当前的缺省授权User Profile
```

```
local-user 00e0fc123456//用户名
```

```
password simple 00e0fc123456//密码
```

```
authorization-attribute level 3//用户角色授权
```

```
authorization-attribute user-profile H3C-1//授权User Profile
```

```
service-type lan-access //服务类型
```

```
local-user 00e0fcba34ef
```

```
password simple 00e0fcba34ef
```

```
authorization-attribute level 3
```

```
authorization-attribute user-profile H3C-2
```

```
service-type lan-access
```

```
#
```

```
#设置相关服务模板
```

```
wlan service-template 1 clear
```

```
ssid MAC-1
```

```
bind WLAN-ESS 1
```

```
service-template enable
```

```
#
```

```
wlan service-template 2 clear
```

```
ssid MAC-2
```

```
bind WLAN-ESS 2
```

```
service-template enable
#
#创建User Profile, 设置相关的SSID
user-profile H3C-1
wlan permit-ssid MAC-1
user-profile H3C-2
wlan permit-ssid MAC-2
#
#设置无线 WLAN-ESS1, 开启mac地址认证
interface WLAN-ESS1
port access vlan 2
port-security port-mode mac-authentication
#
interface WLAN-ESS2
port access vlan 2
port-security port-mode mac-authentication
#
wlan ap TEST model WA2610H-GN
serial-id 210231A0FH9167000132
radio 1
service-template 1
service-template 2
radio enable
#激活已经创建的User Profile
user-profile H3C-1 enable
user-profile H3C-2 enable
#
```

user-profile enable命令用来激活已创建的User Profile，这一步必不可少，经常有工程师忘记配置，导致绑定失败。